







HSF RoHS

SPECIFICATIONS PERFORMANCE

Electical Rating: AC/DC 50V 0.5A
 Insulation Resistance: 500M Ω
 Withstang Volt: 200V AC/minute
 Opratng Temperature: -40 $^{\circ}$ to+105 $^{\circ}$
 Material
 Contact: Phosphor Bronze Gold-Plated
 Housing: LCP



ASSEMBLY

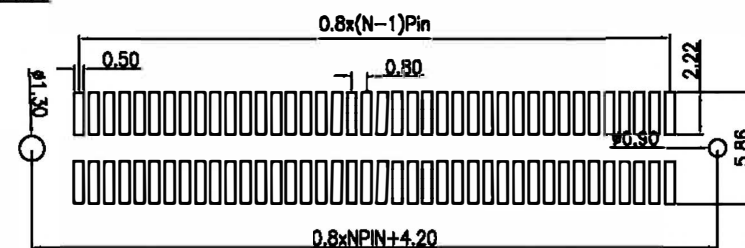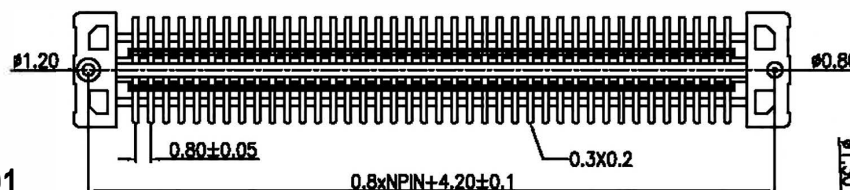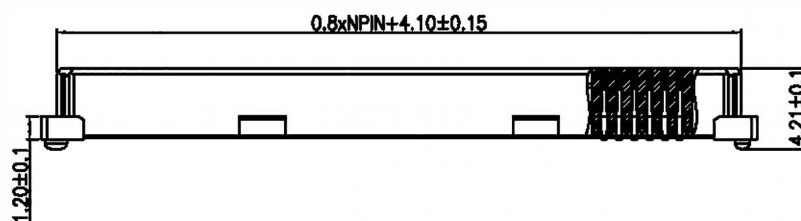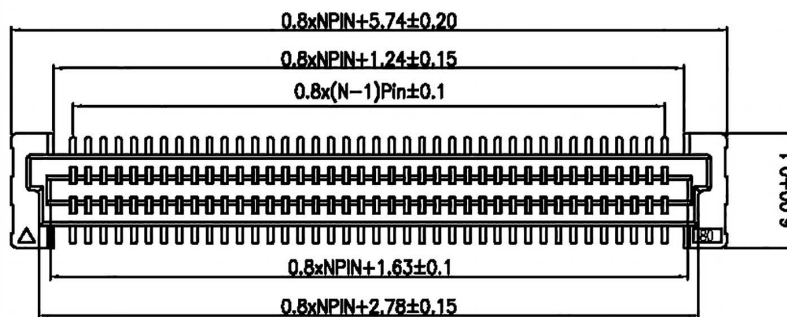

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE \pm 0.05)

Ordering Information

3710 F XXX 037 XX F X 01

F=Female
 M=Male
 No.of pins
 80,80,
 100,140P
 Plastic Hight
 037=3.71mm
 Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 Packing
 T:Tube
 R:Reel

				OPERATION		DRAW	BEN	12.03.28	SCALE	FIT		
				X.X	\pm 0.30				UNIT	mm		
				X.XX	\pm 0.20	CHECK			SIZE	A4	PART NO.	
				X.XXX	\pm 0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	ANGLE	APPROVE			PROJ.		TITLE:	
					TOL							
A0	2012.03.28	NEW DRAWING									3710FXXX037XXFX01	
											0.80BTB NPin H3.71 Female	