
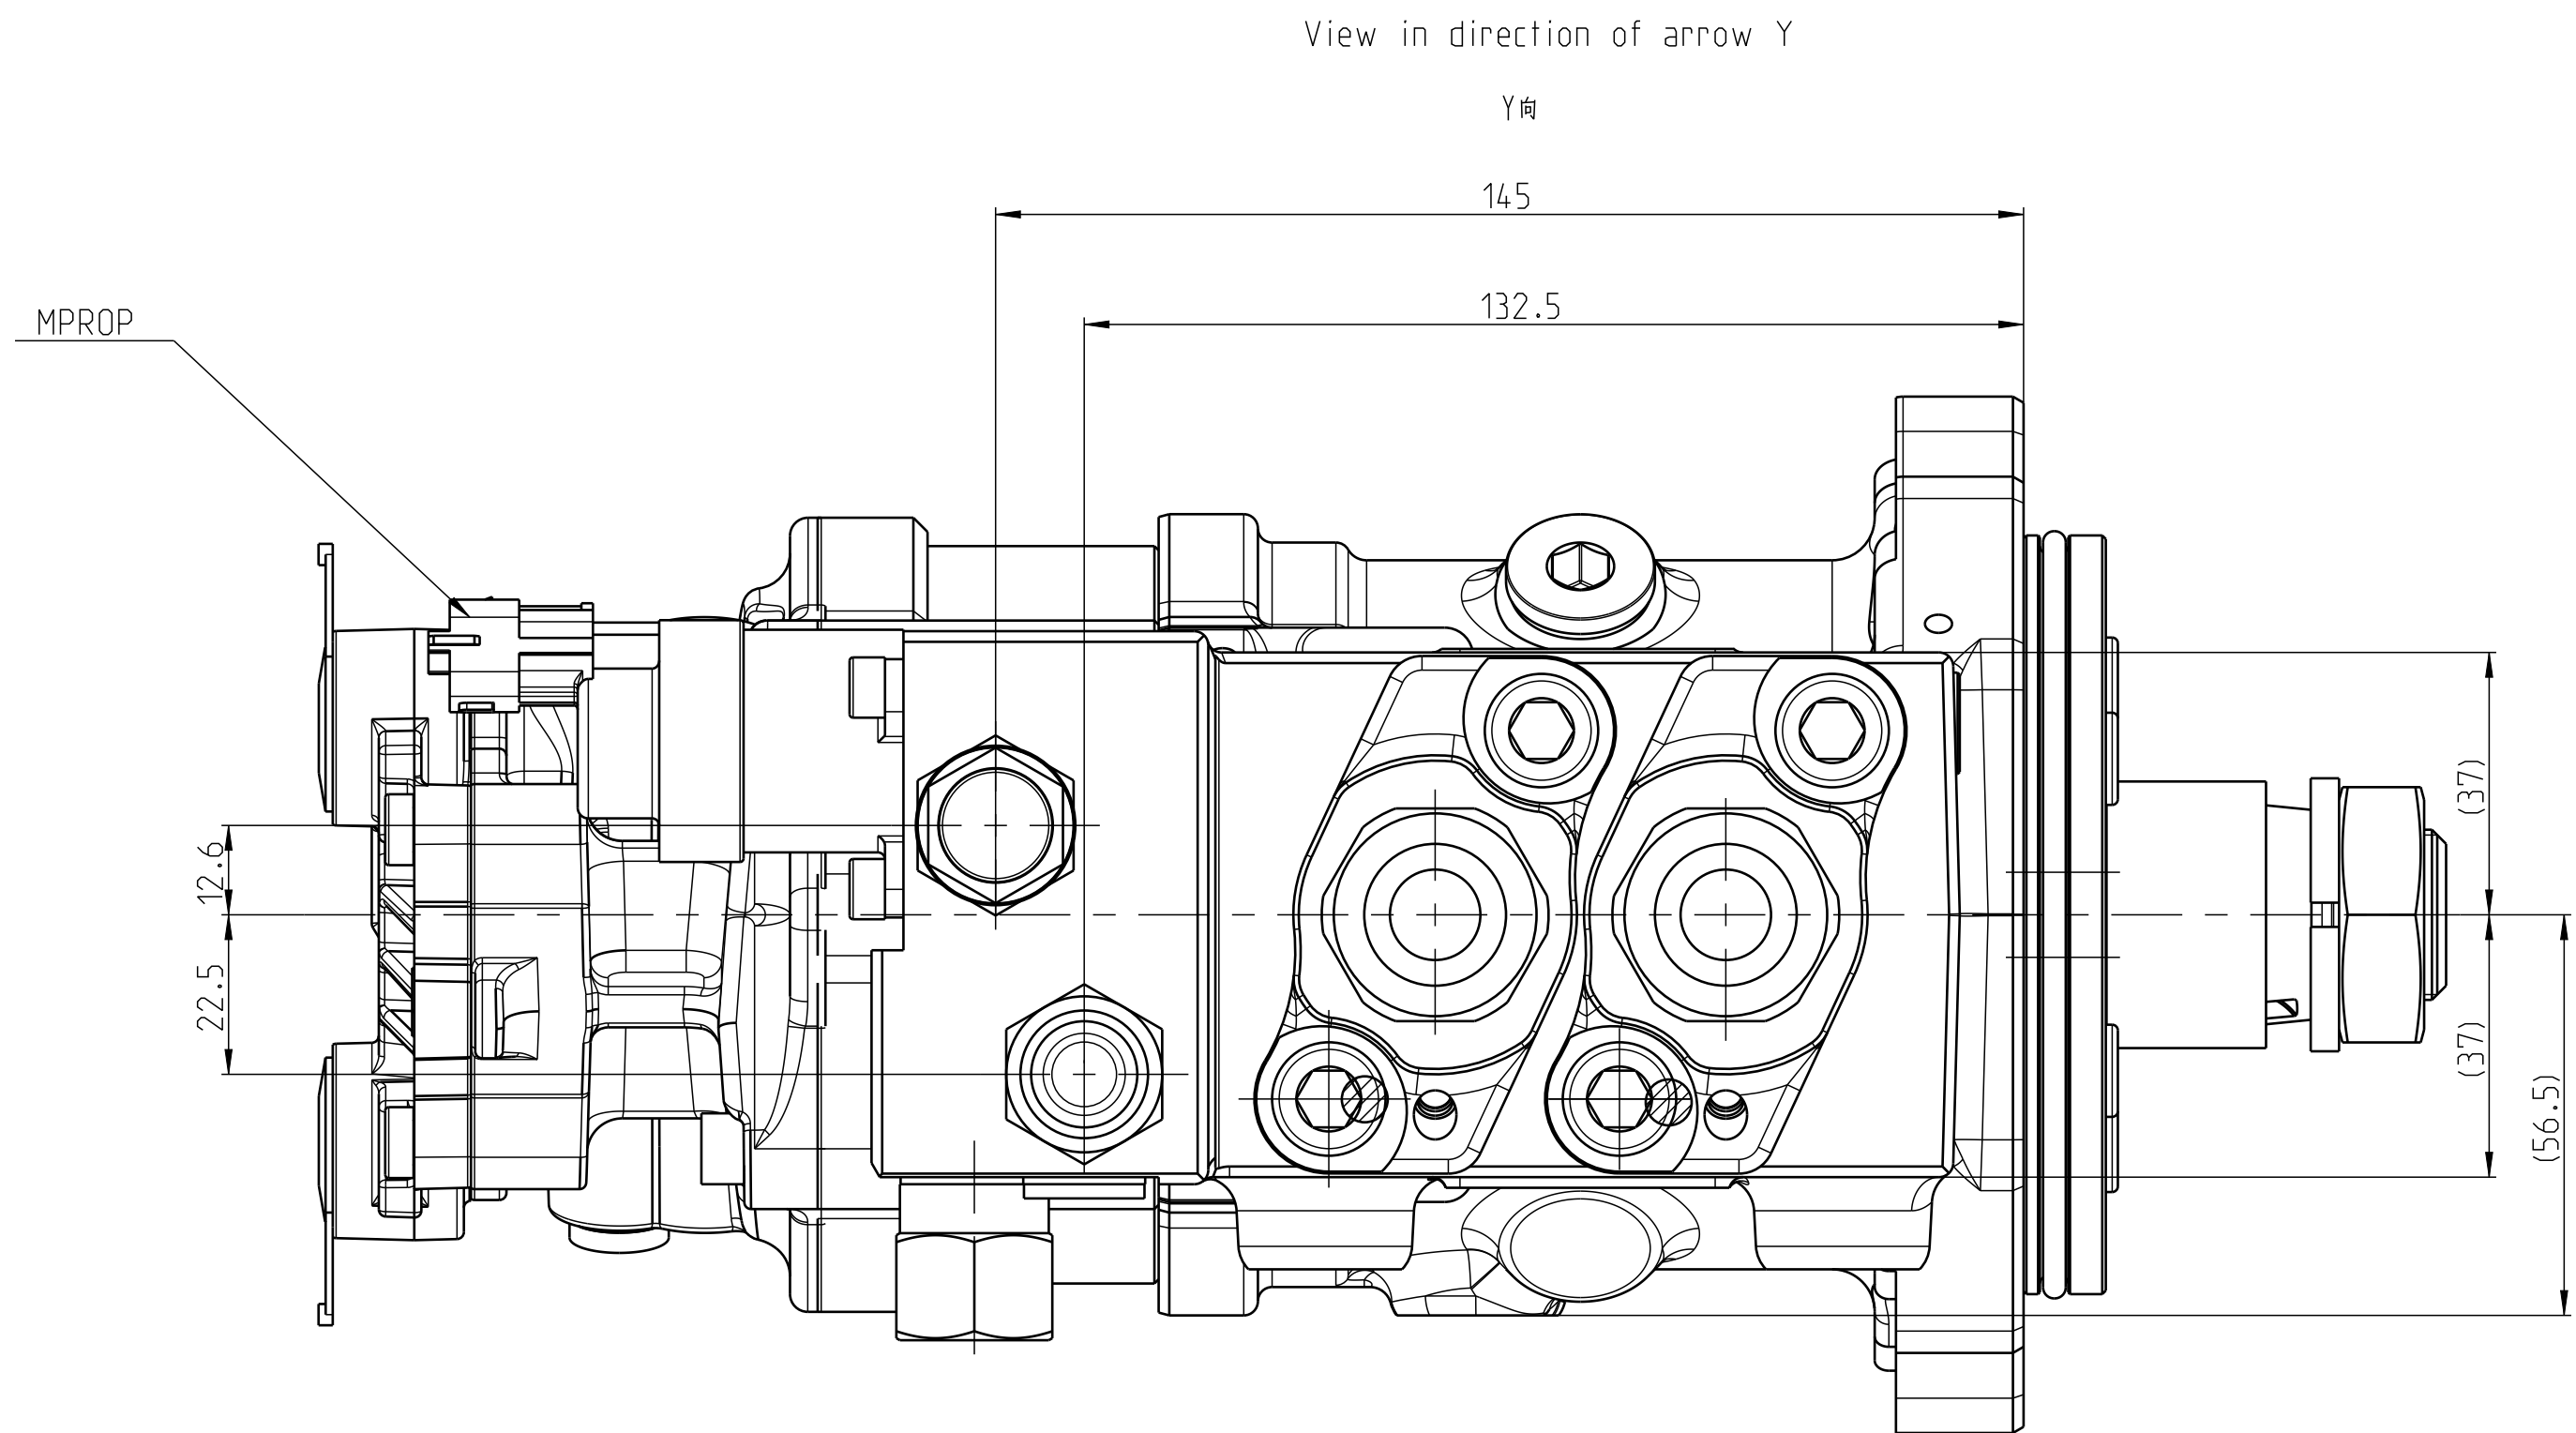



© 罗伯博. 博世集团所有.
所有权利保留. 未经许可, 复制或分发.
此文件为内部文件.

© Robert Bosch GmbH. All rights reserved. All rights reserved.
All rights reserved. All rights reserved.
All rights reserved. All rights reserved.

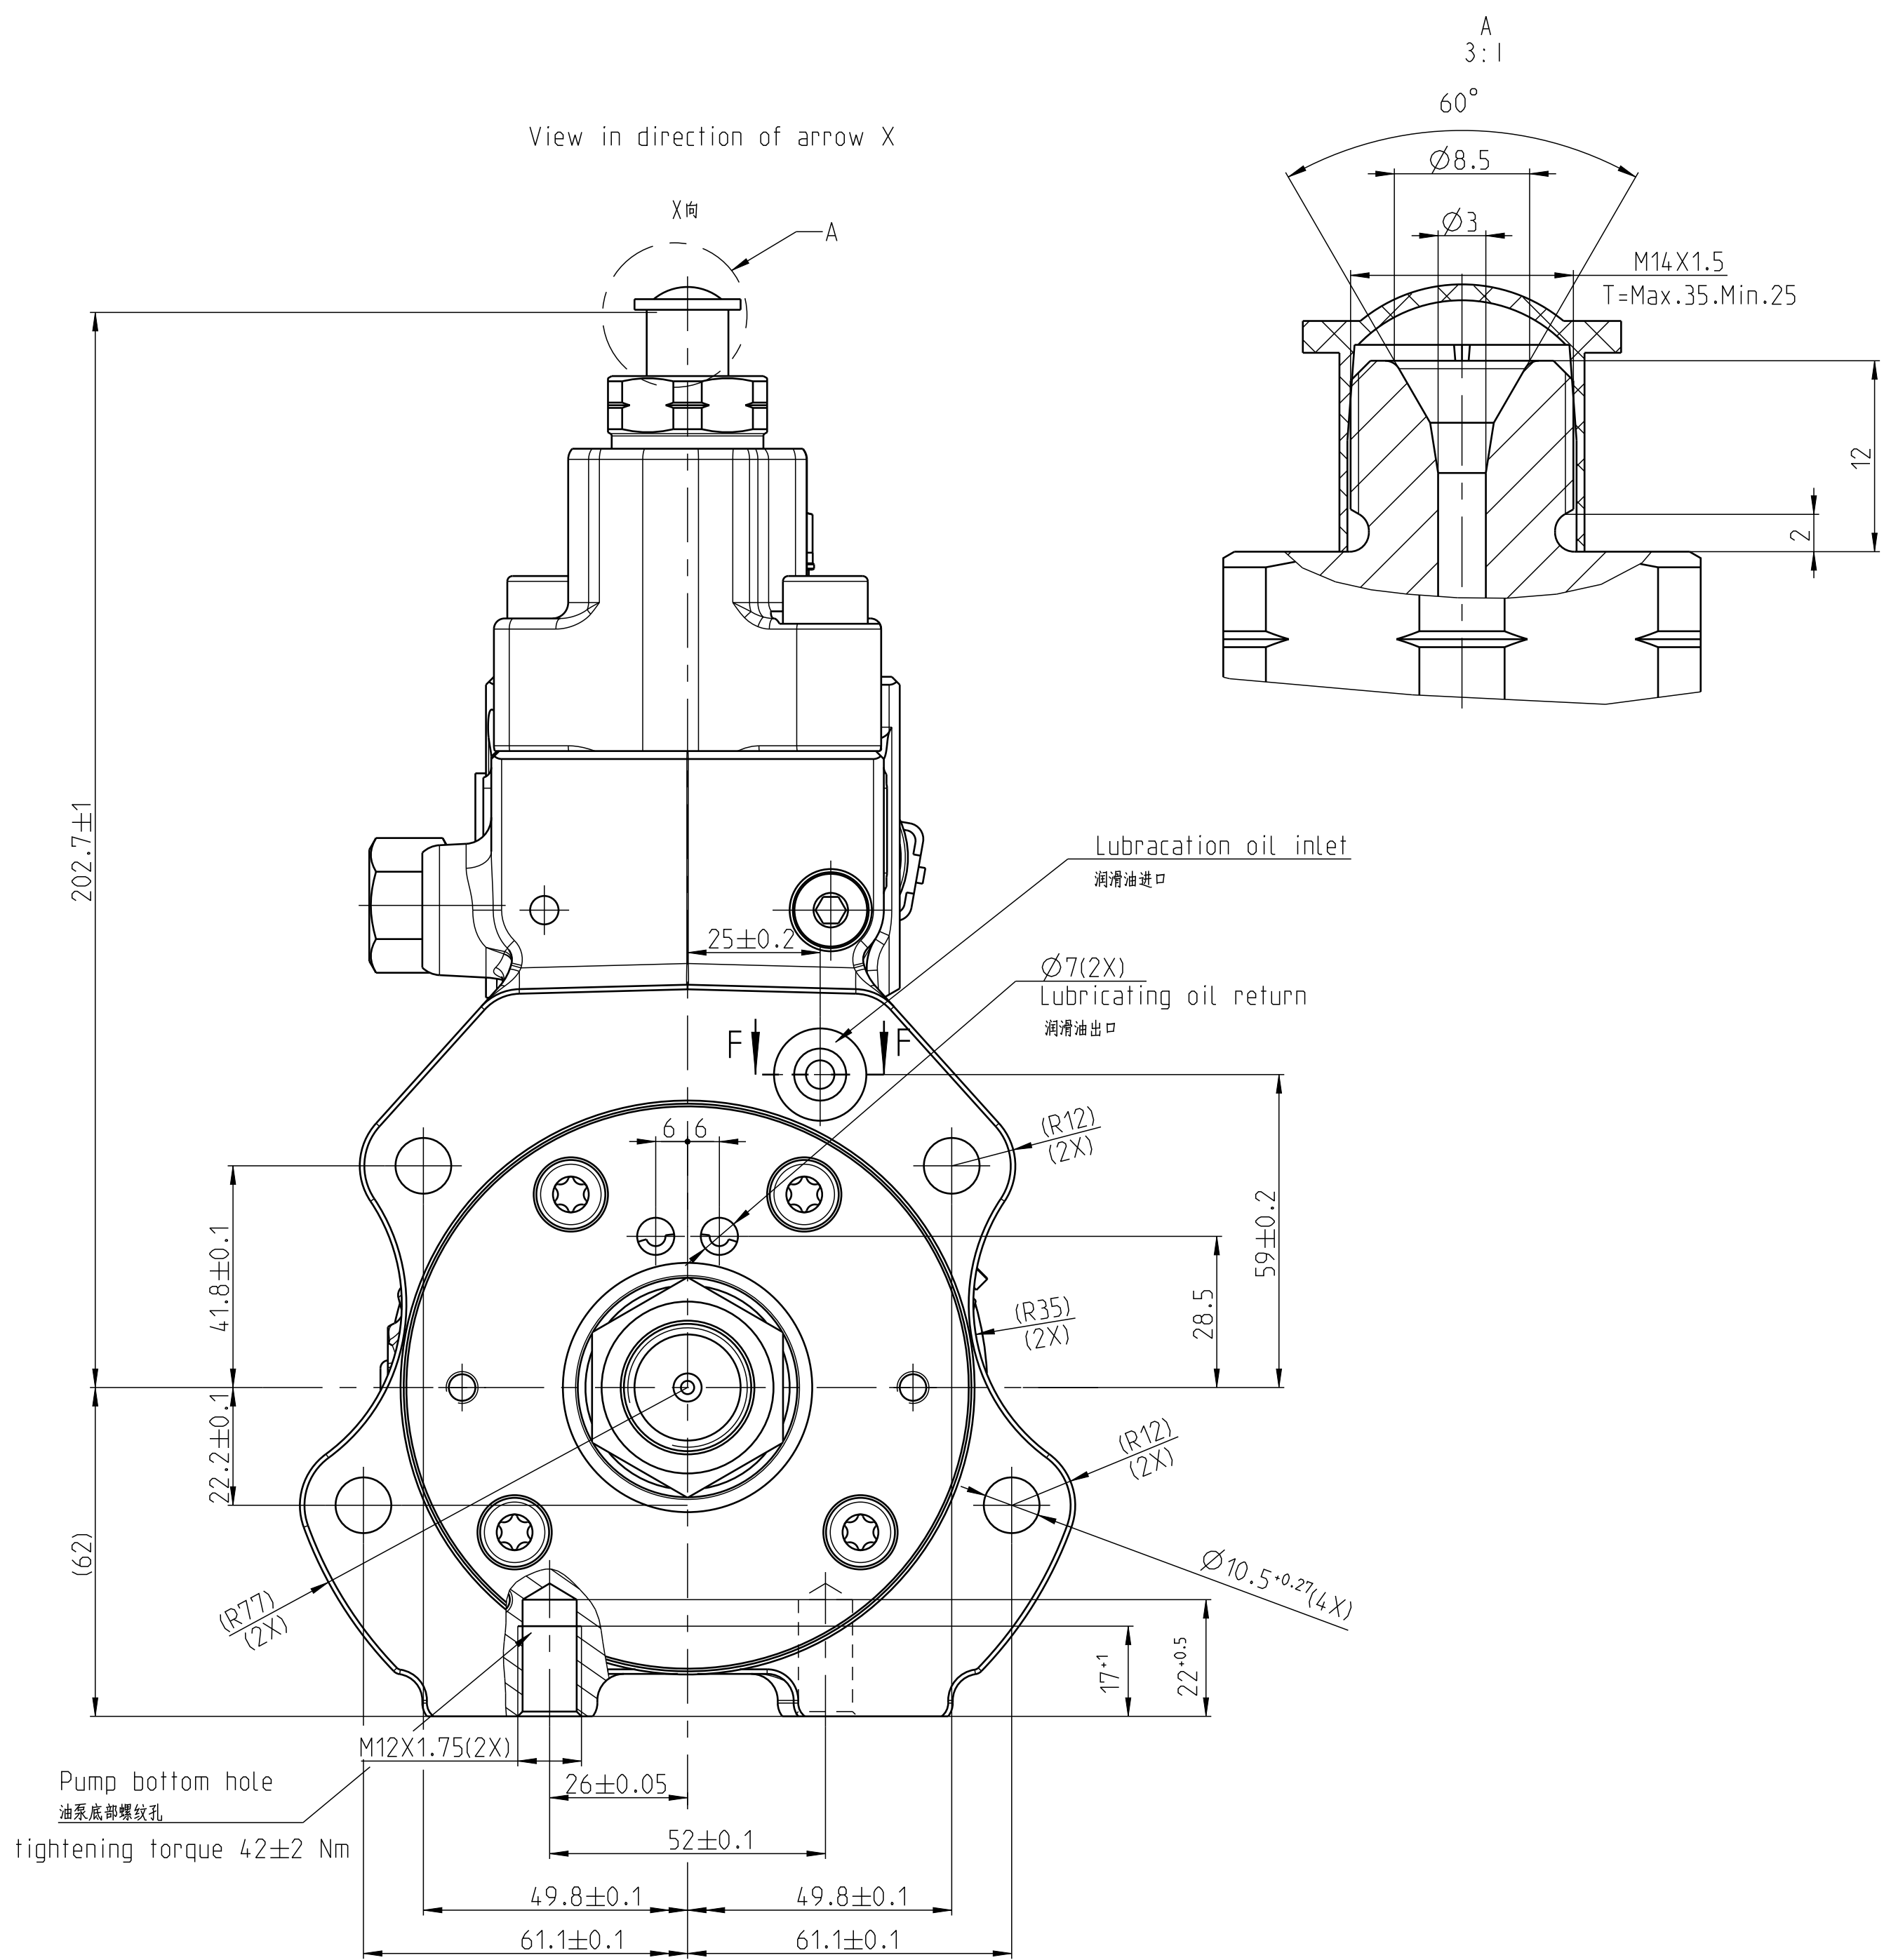

Reference TCD 参考TCD	0 445 Y30 316-00
Ambient temperature from -25 °C to 120°C during pump running 油泵运转时环境温度从-25°C到120°C	
Type of oil/fuel reference to TCD 润滑油 / 燃油类型参考TCD	
Quantity of oil/fuel reference to TCD 润滑油 / 燃油油量参考TCD	
Rotation direction 旋向	Left 左
“Left” means anti clockwise when looking at the driven end 所谓“左旋”就是指从泵的驱动端看是逆时针方向旋转	
MPROP currentless open MPROP 断电常开	
Disassemble is not permitted with paint mark 漆标处不允许拆卸	
All open ends closed with protection caps 所有开端加盖护帽	
The low pressure system must be BLED before start 在低压循环时需要放气	
No grease allowed at tapered shaft before mounted on engine 在装上发动机前 油泵驱动轴锥面不允许有油脂	
SW:Wrench size (unit: mm) SW:六角头对边宽度 (单位:mm)	
All seals have to be changed if connection is untightened 所有密封元件只能一次性使用	
Customer added part only after agreement with RB 用户的附加件 只有在与博世公司协商后才允许	

Connector specification : 连接规范:
MPROP connector: MPROP 接头:
Harness connector has to be according to A 928 000 453 (Orde-No:1 928 403 874) with BSK2.8 or BDK2.8 contact, 2-pole code1.goldplated. 插座必须根据 A928 000 453 (订货号:1 928 403 874) BSK2.8 或者BDK2.8, 2个电极 代号1 镀金板连接

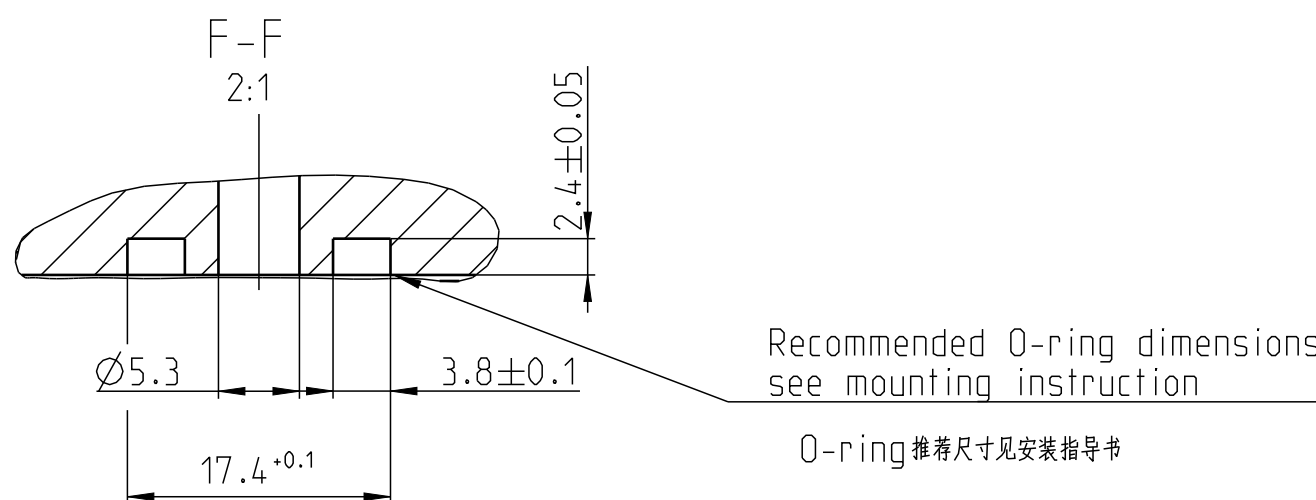

general tolerances for / 公差标准		
lin. dim./线规	rad./半径	angles/角度
±0.5mm	±0.5mm	±1°

01 0449XH9834	20190411	Fay3wx	Xal1wx	Xuy1wx	376	RBCD/EHP5	FXR1239646
00 0449XH6264	20170502	Fay3wx	Suj1wx	Xuy1wx	376	RBCD/EHP5	
Ind./Change/更改	YYYYMMDD	Drawn/制图	Checked/校对	Released/放行	BWN	Resp. dept./责任部门	Add. info./附加信息
Lang./语言 en/zh	Syst./系统 PE	Wght./重量	BANKED -PISTON -PUMP 直列式柱塞泵		Size/体积 2/2		
Scale/比例 1:1		Doc. type AGZ 0 445 A30 151		DP	Ind./ 01	Format A1	
MNRD 445 B30 151-01		OFFER DRAWING 客户图纸		Repl. for/替换		Repl. by/替换文件	