


KEYCHAIN KREATURES / MAIN BOARD

ONE-SHEET CIRCUIT VIEW | C.5: Landscape screen / rear MCU / compact through-hole placement | Engineering prototype


POWER INPUT + LOCAL BYPASS

Regulation / charging stay on the separate power board.

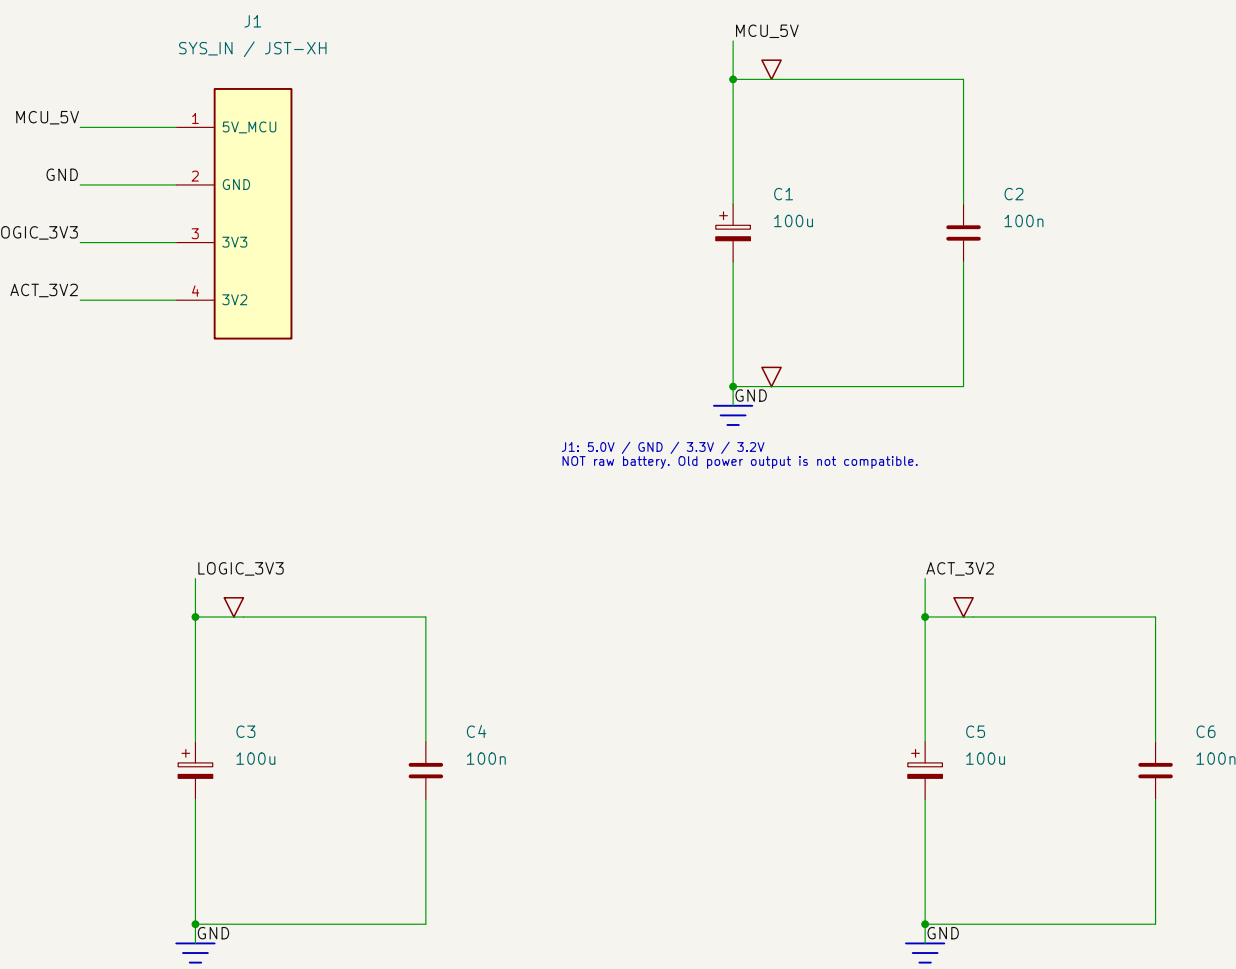

ESP32-S3 SUPERMINI / SOCKET

Header signals shown by GPIO: pad names match supplied footprint.

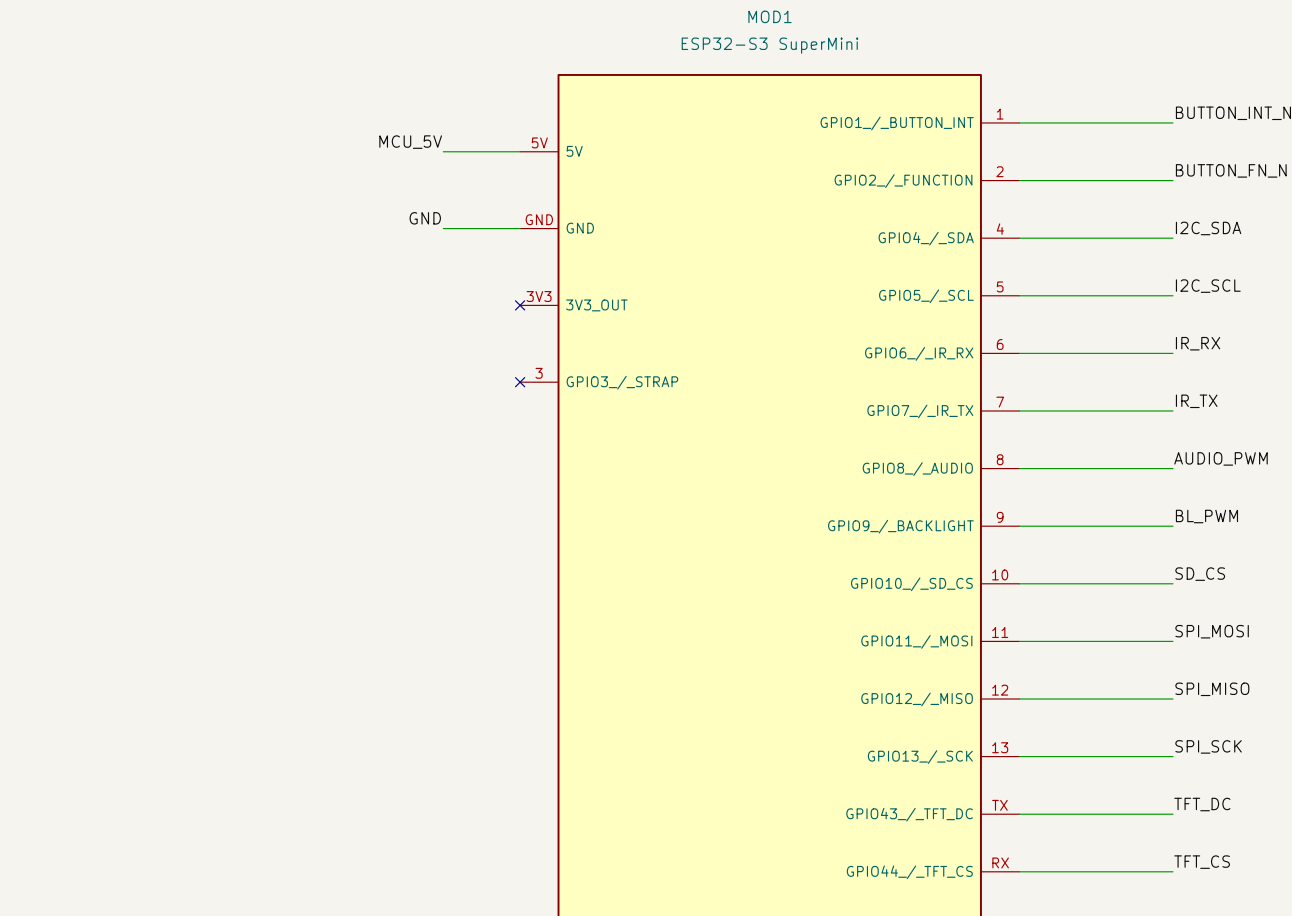

USB service: remove socketed MCU first. S3S QFN is intentionally not tied to the external V33 rail.

SCREEN + microSD + BACKLIGHT

Shared SPI clock / MOSI. Separate CS lines. Both modules use 3.3V logic.

