





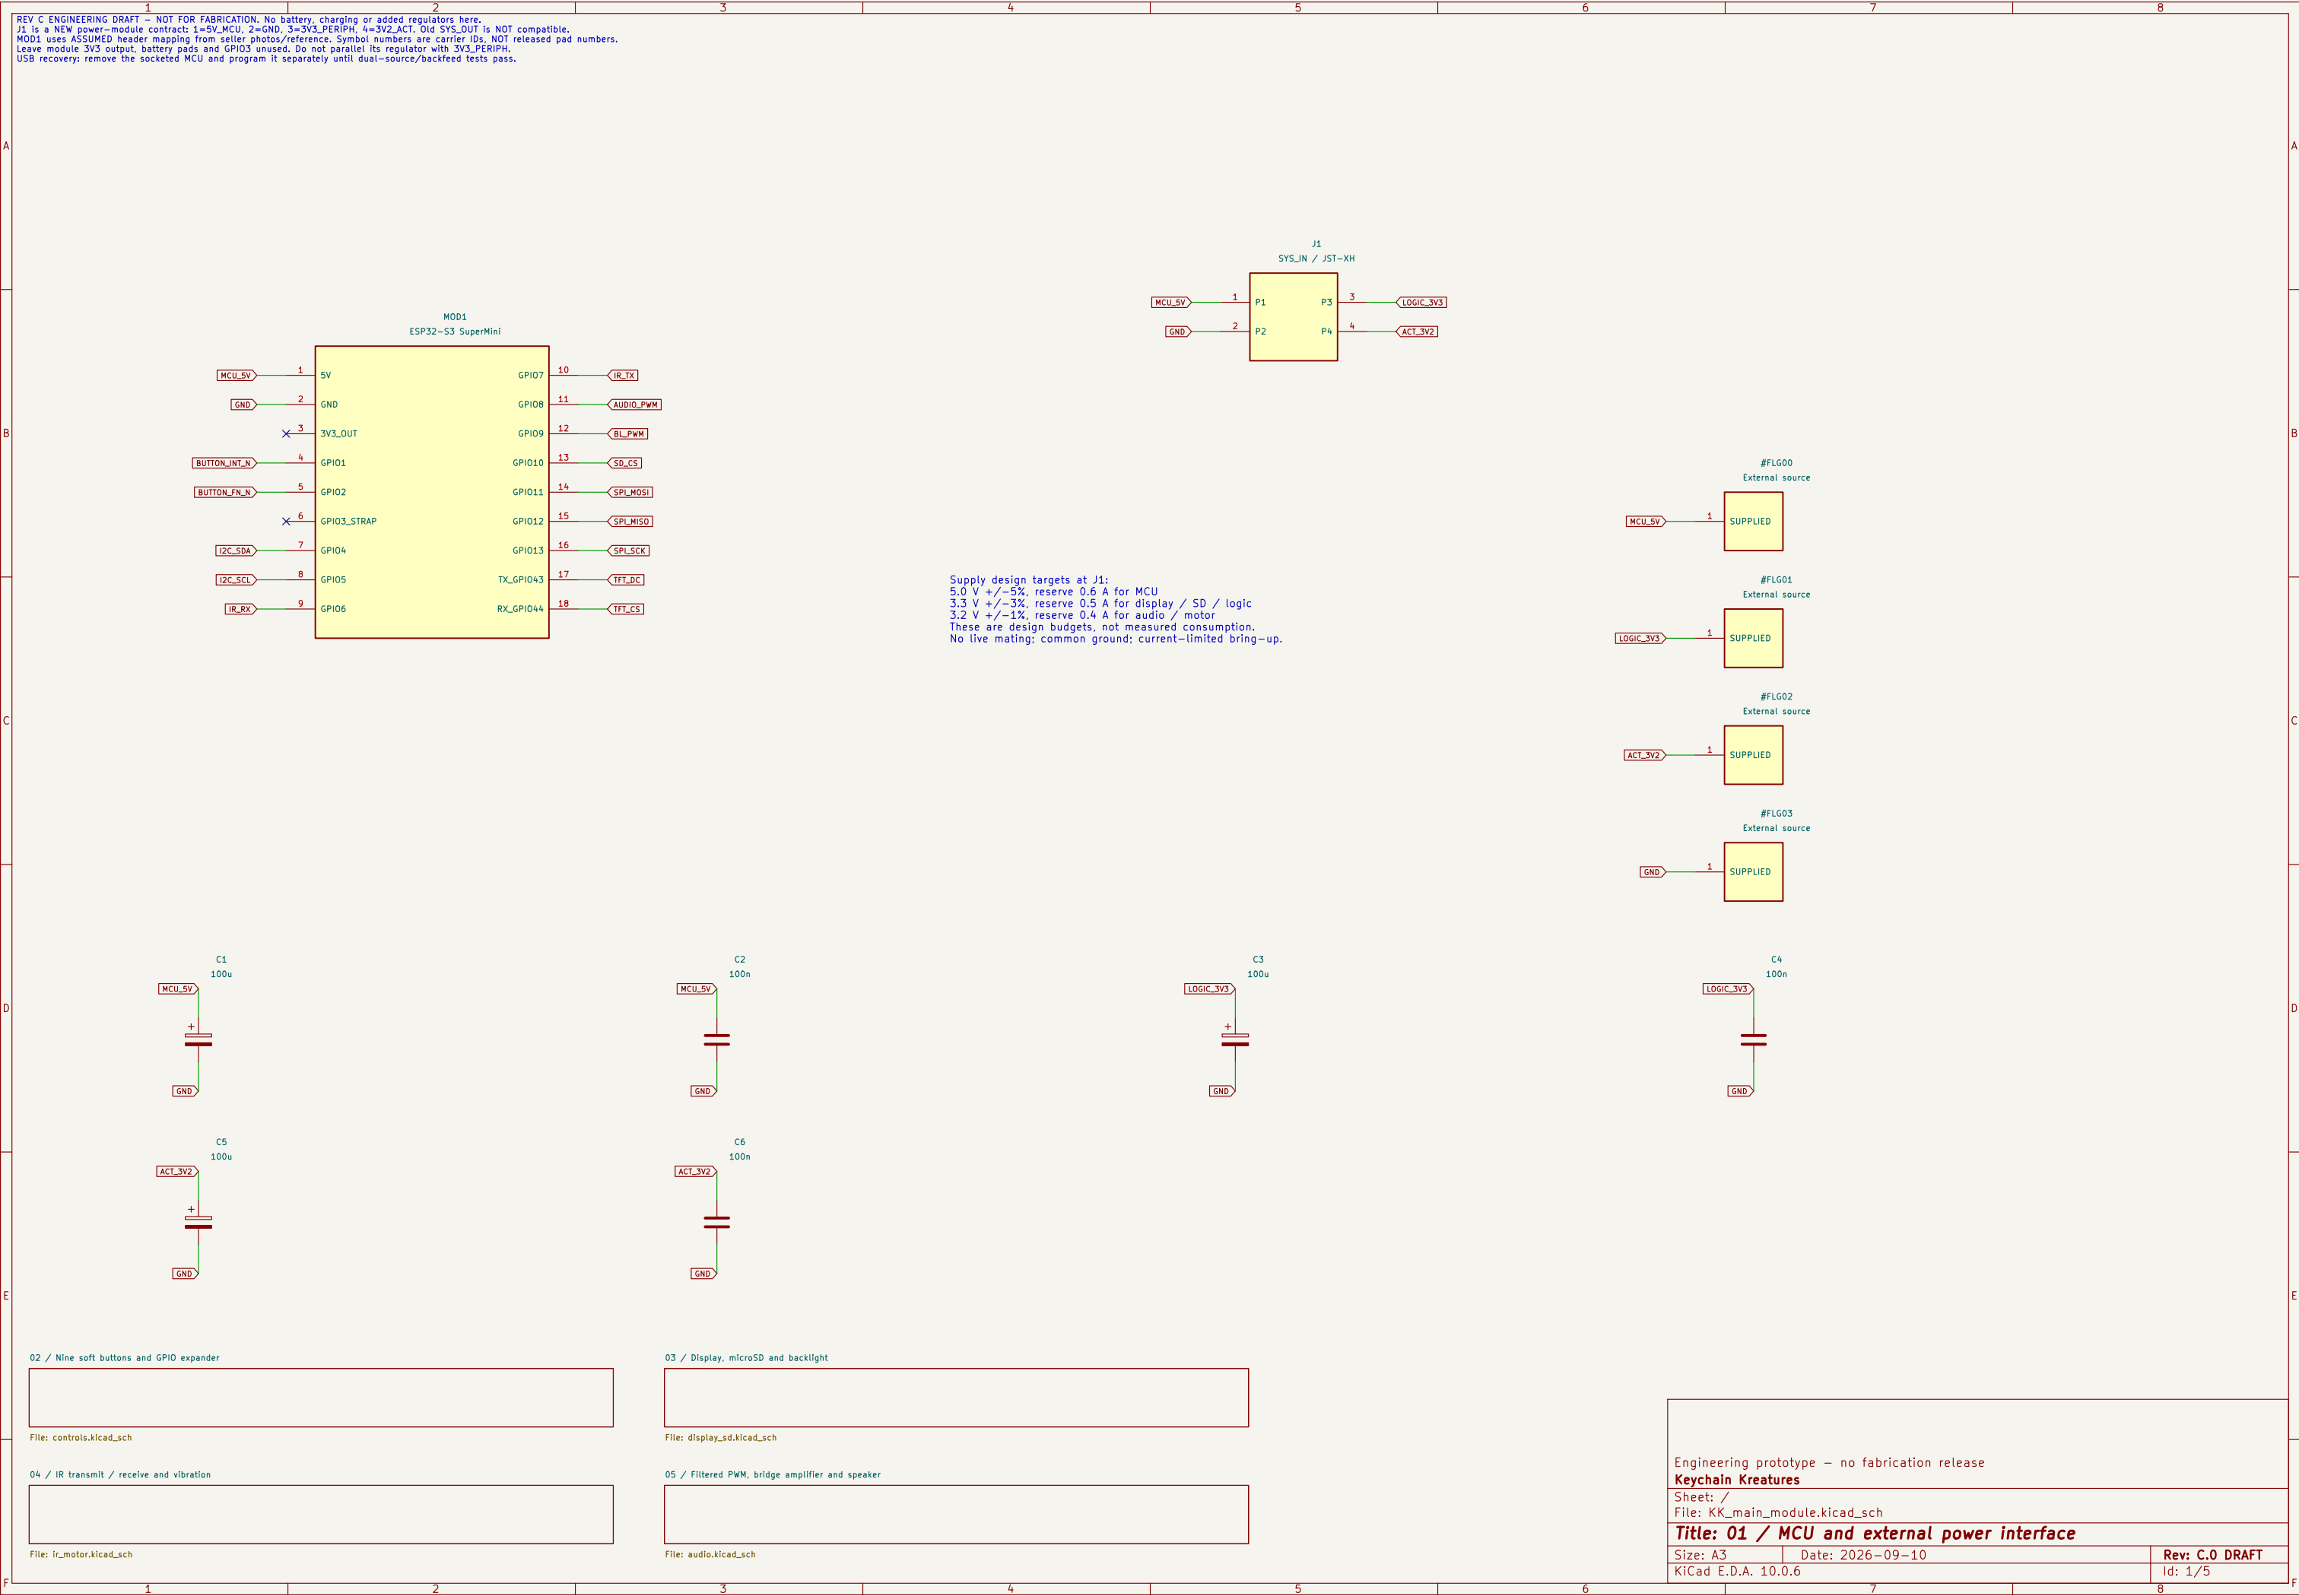

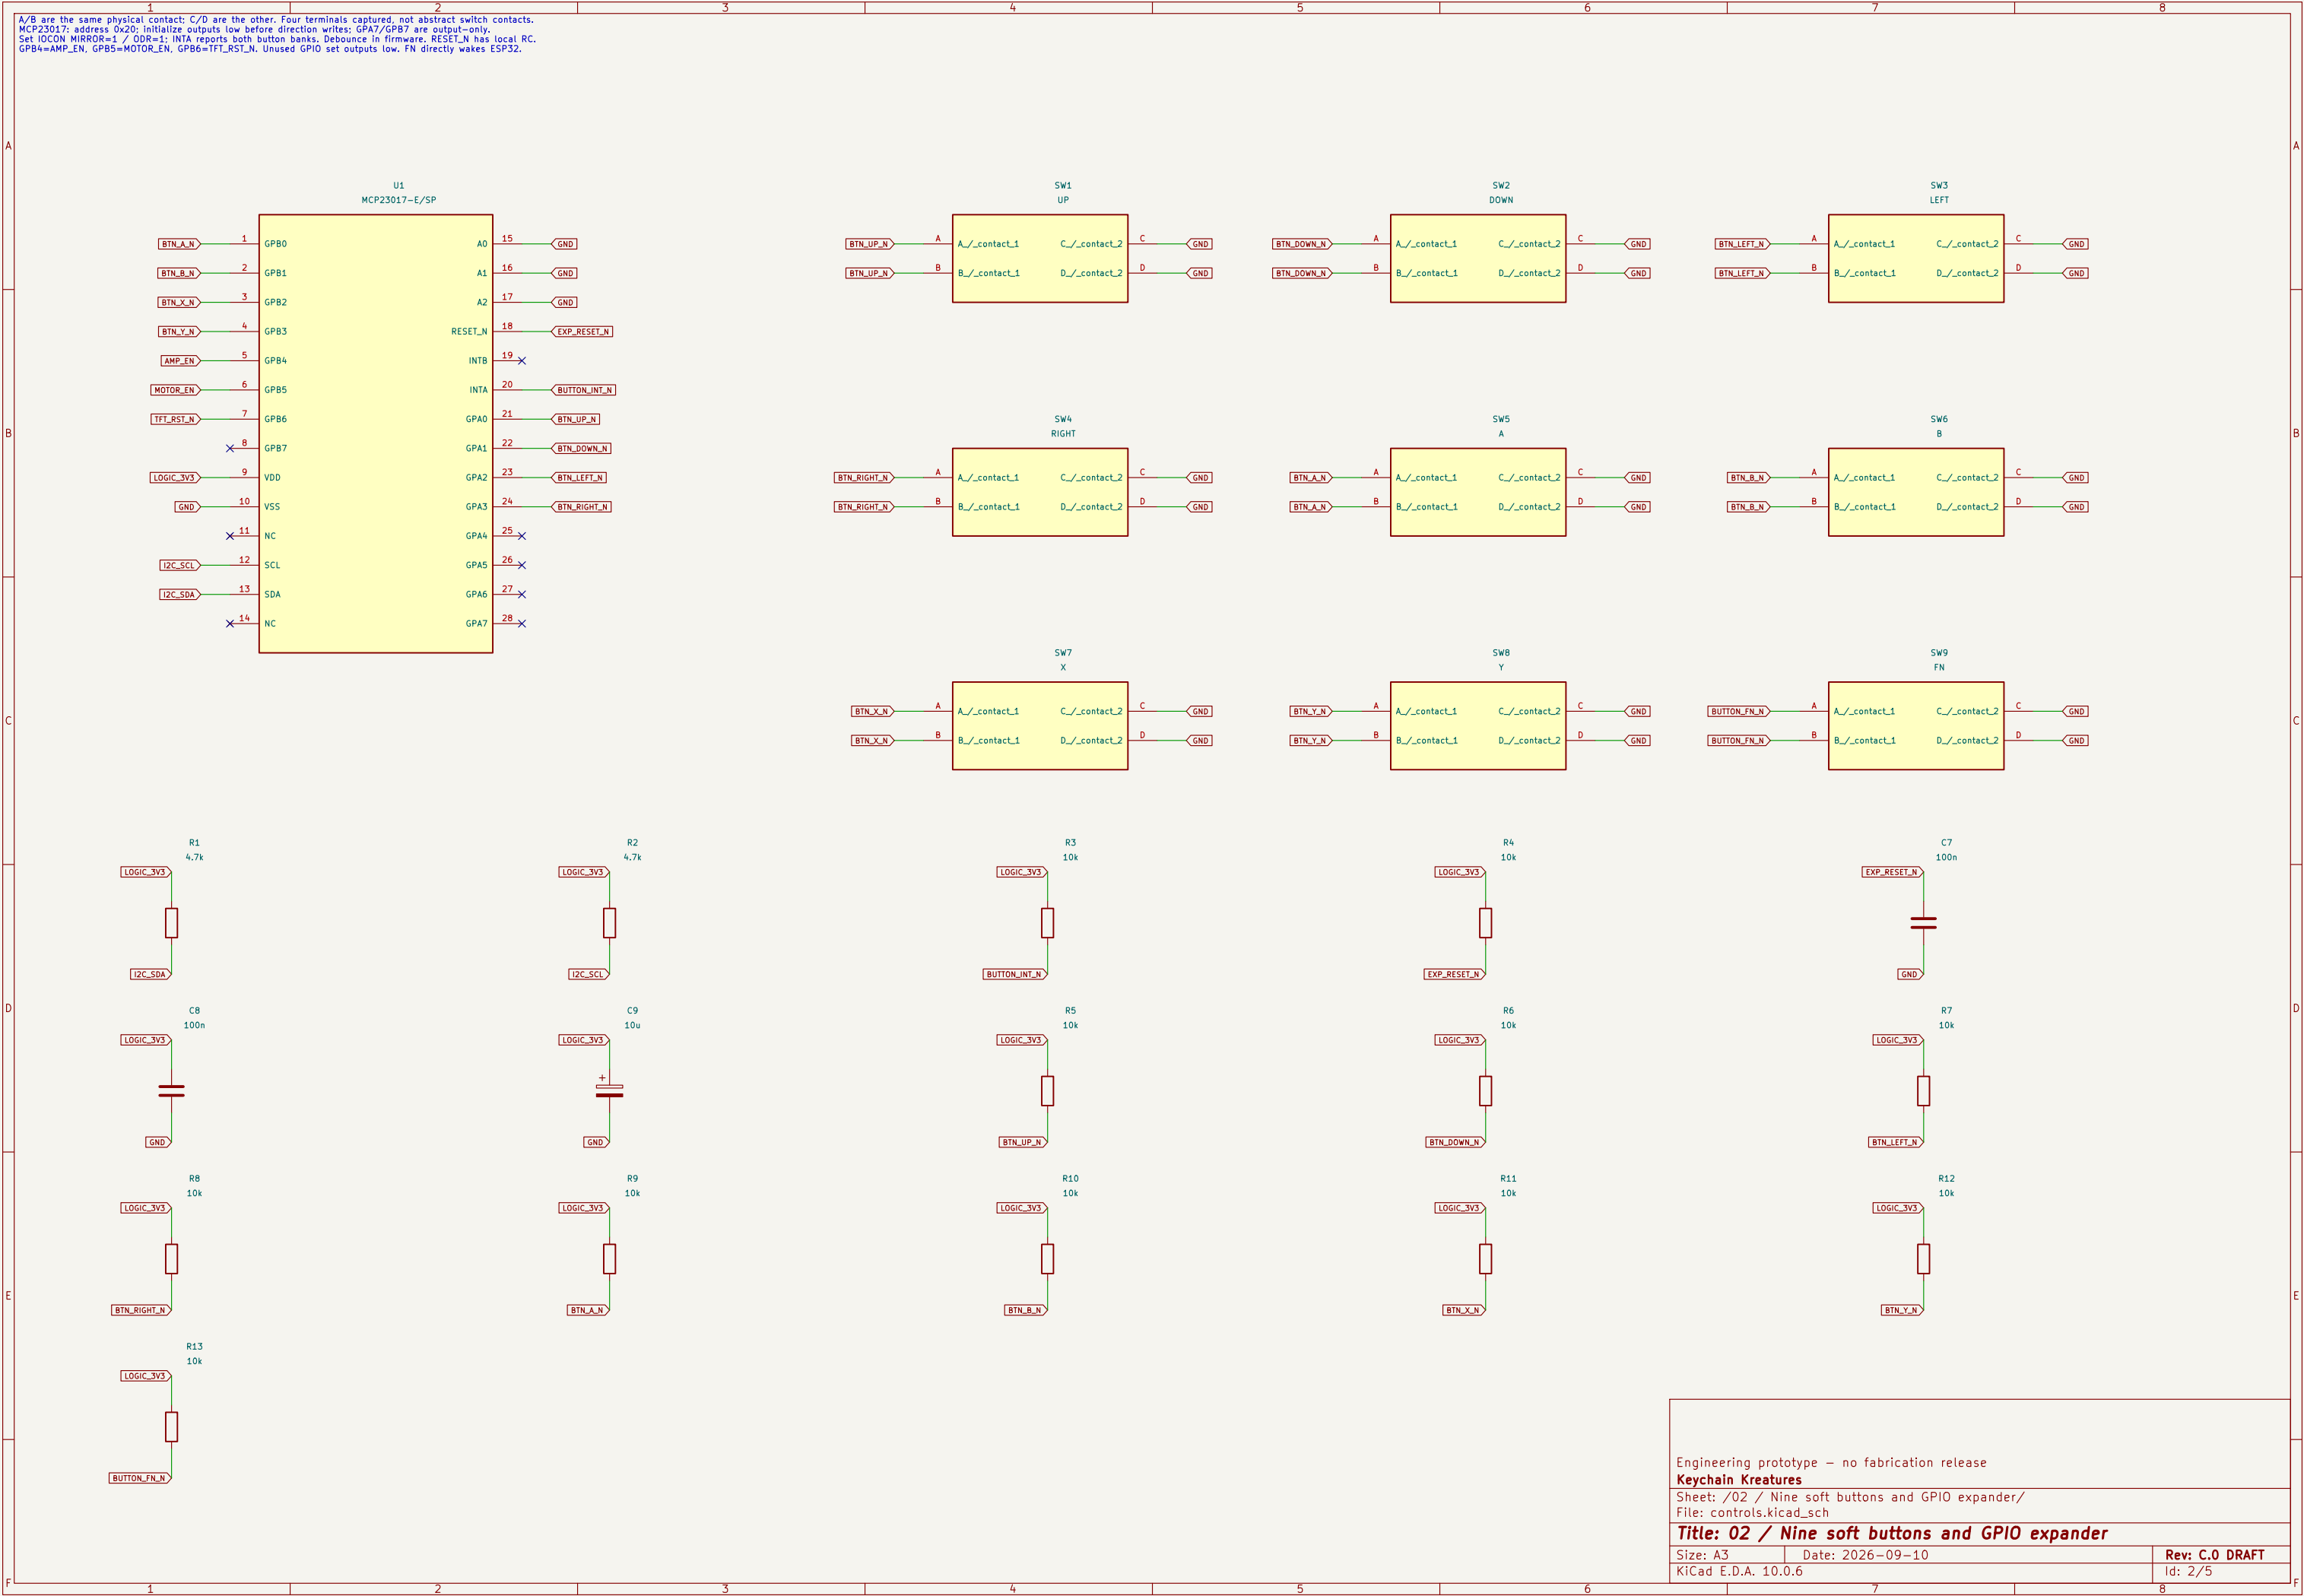

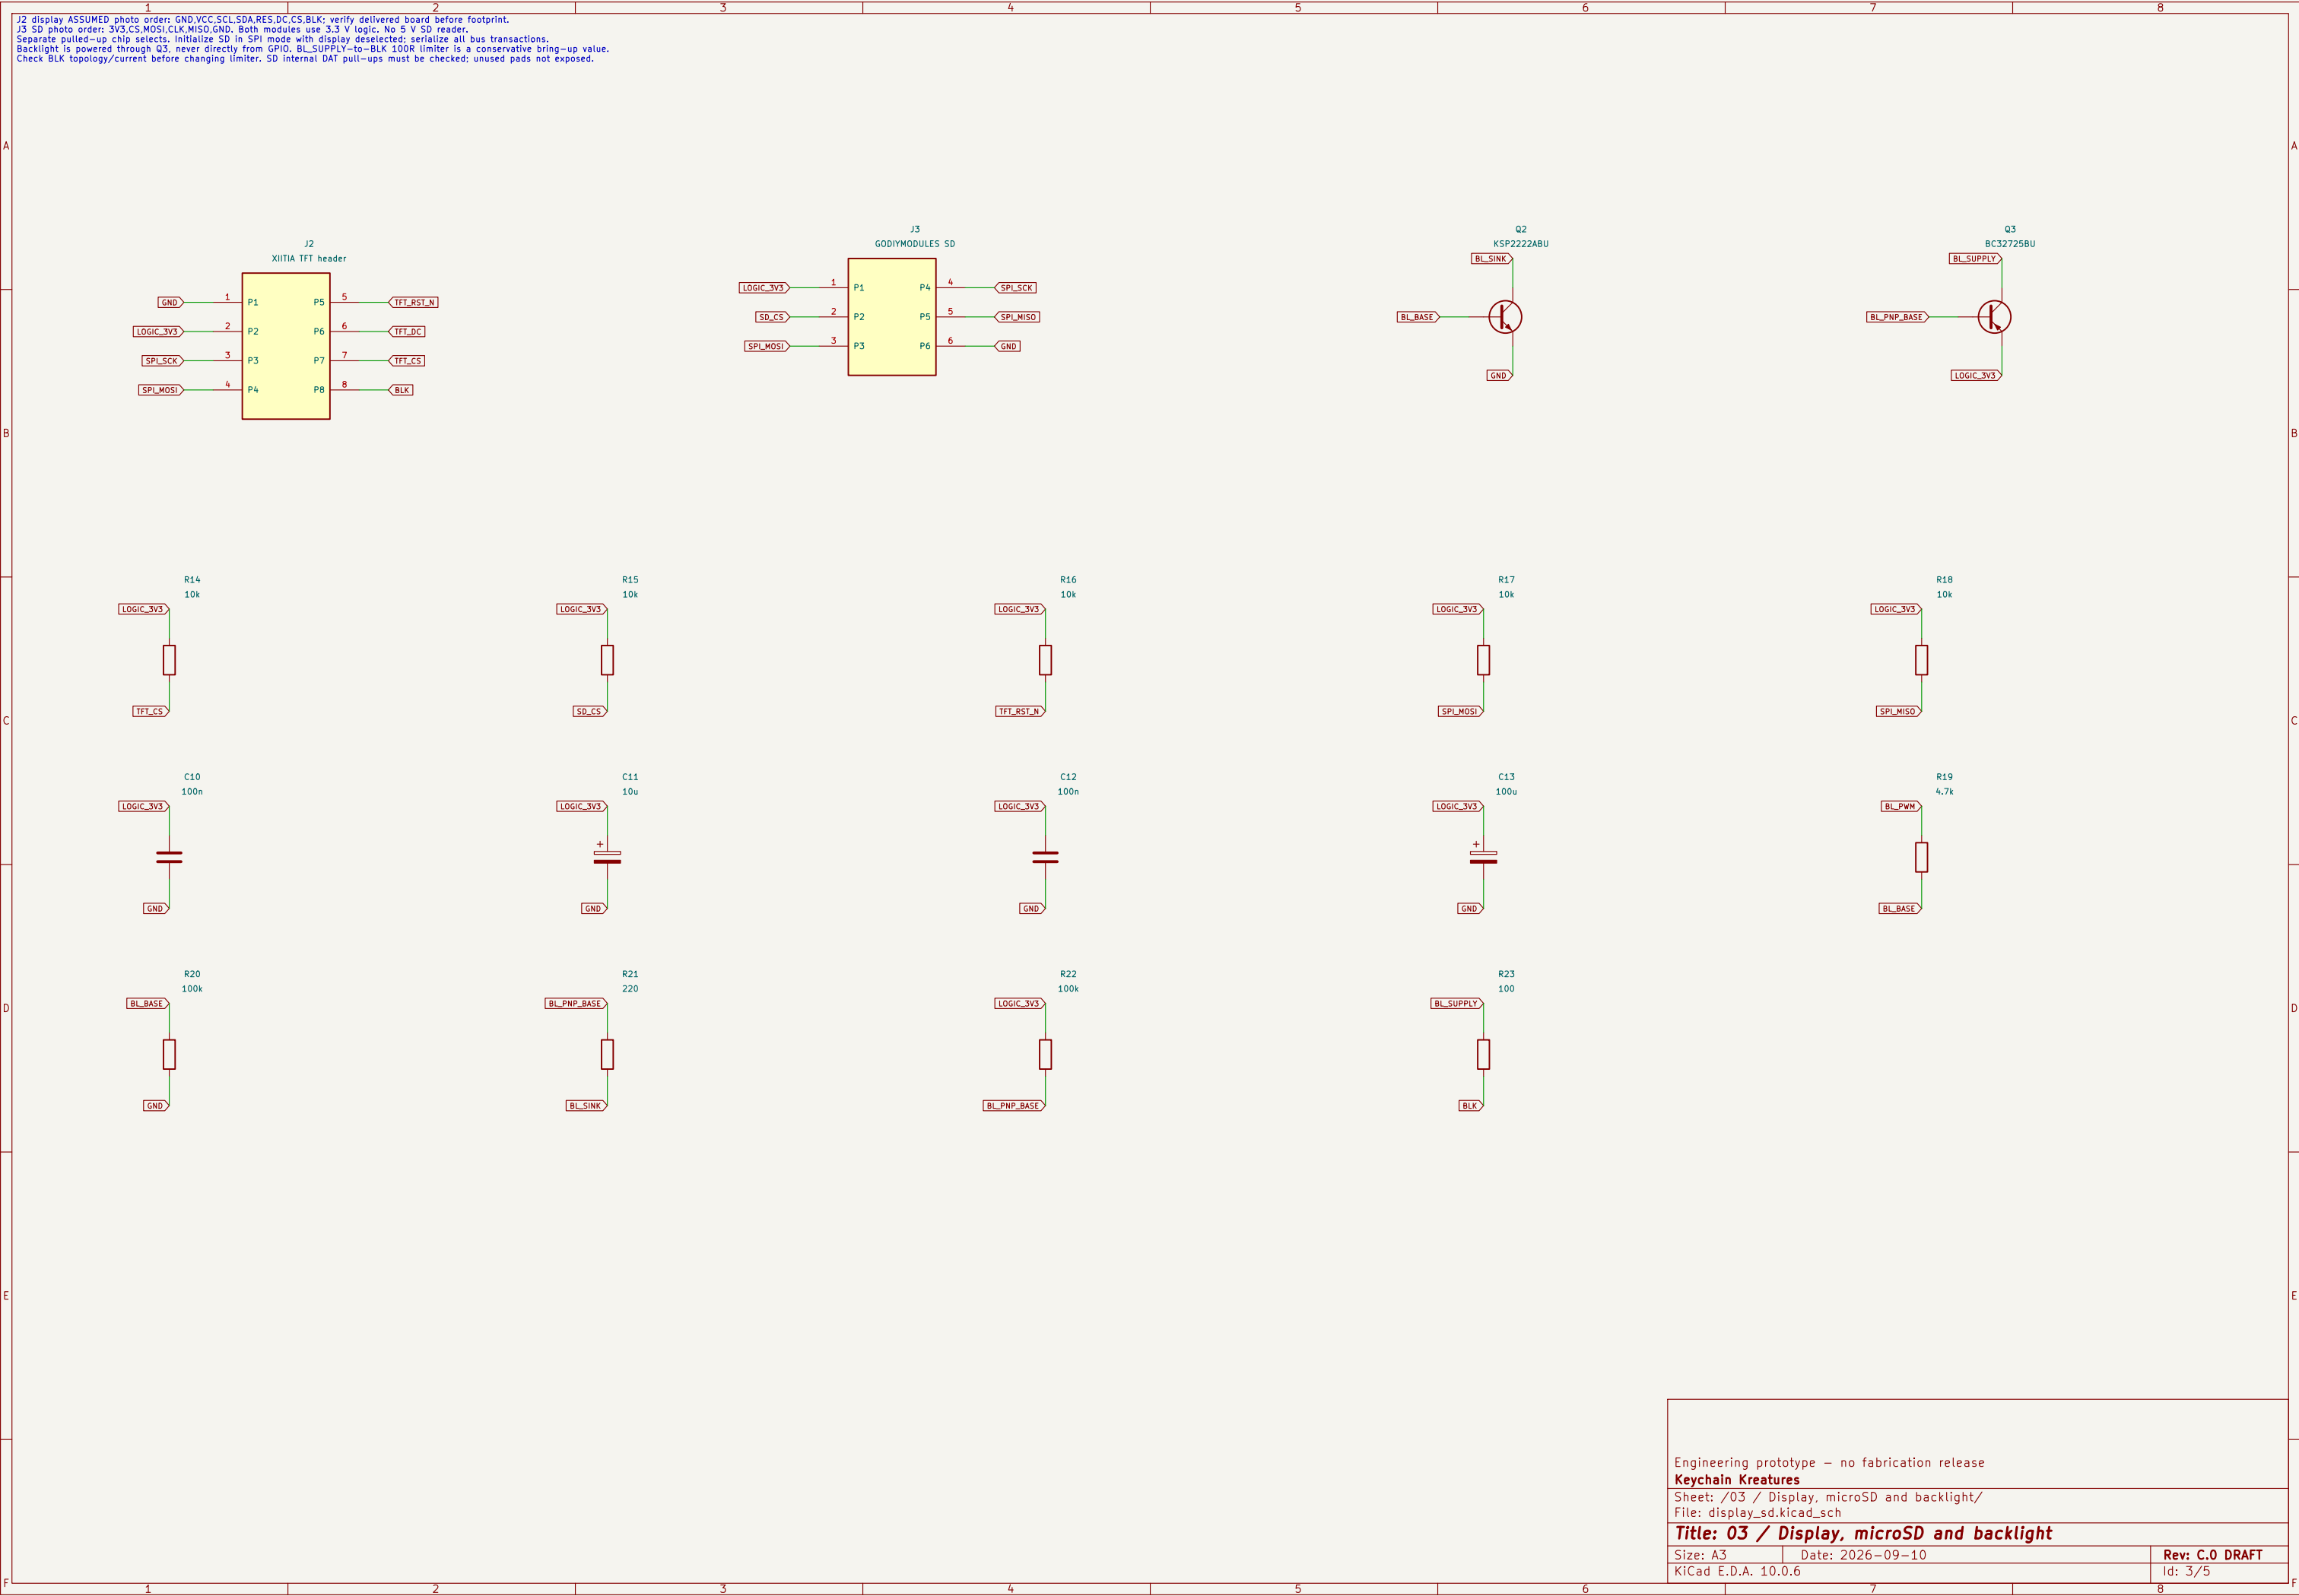

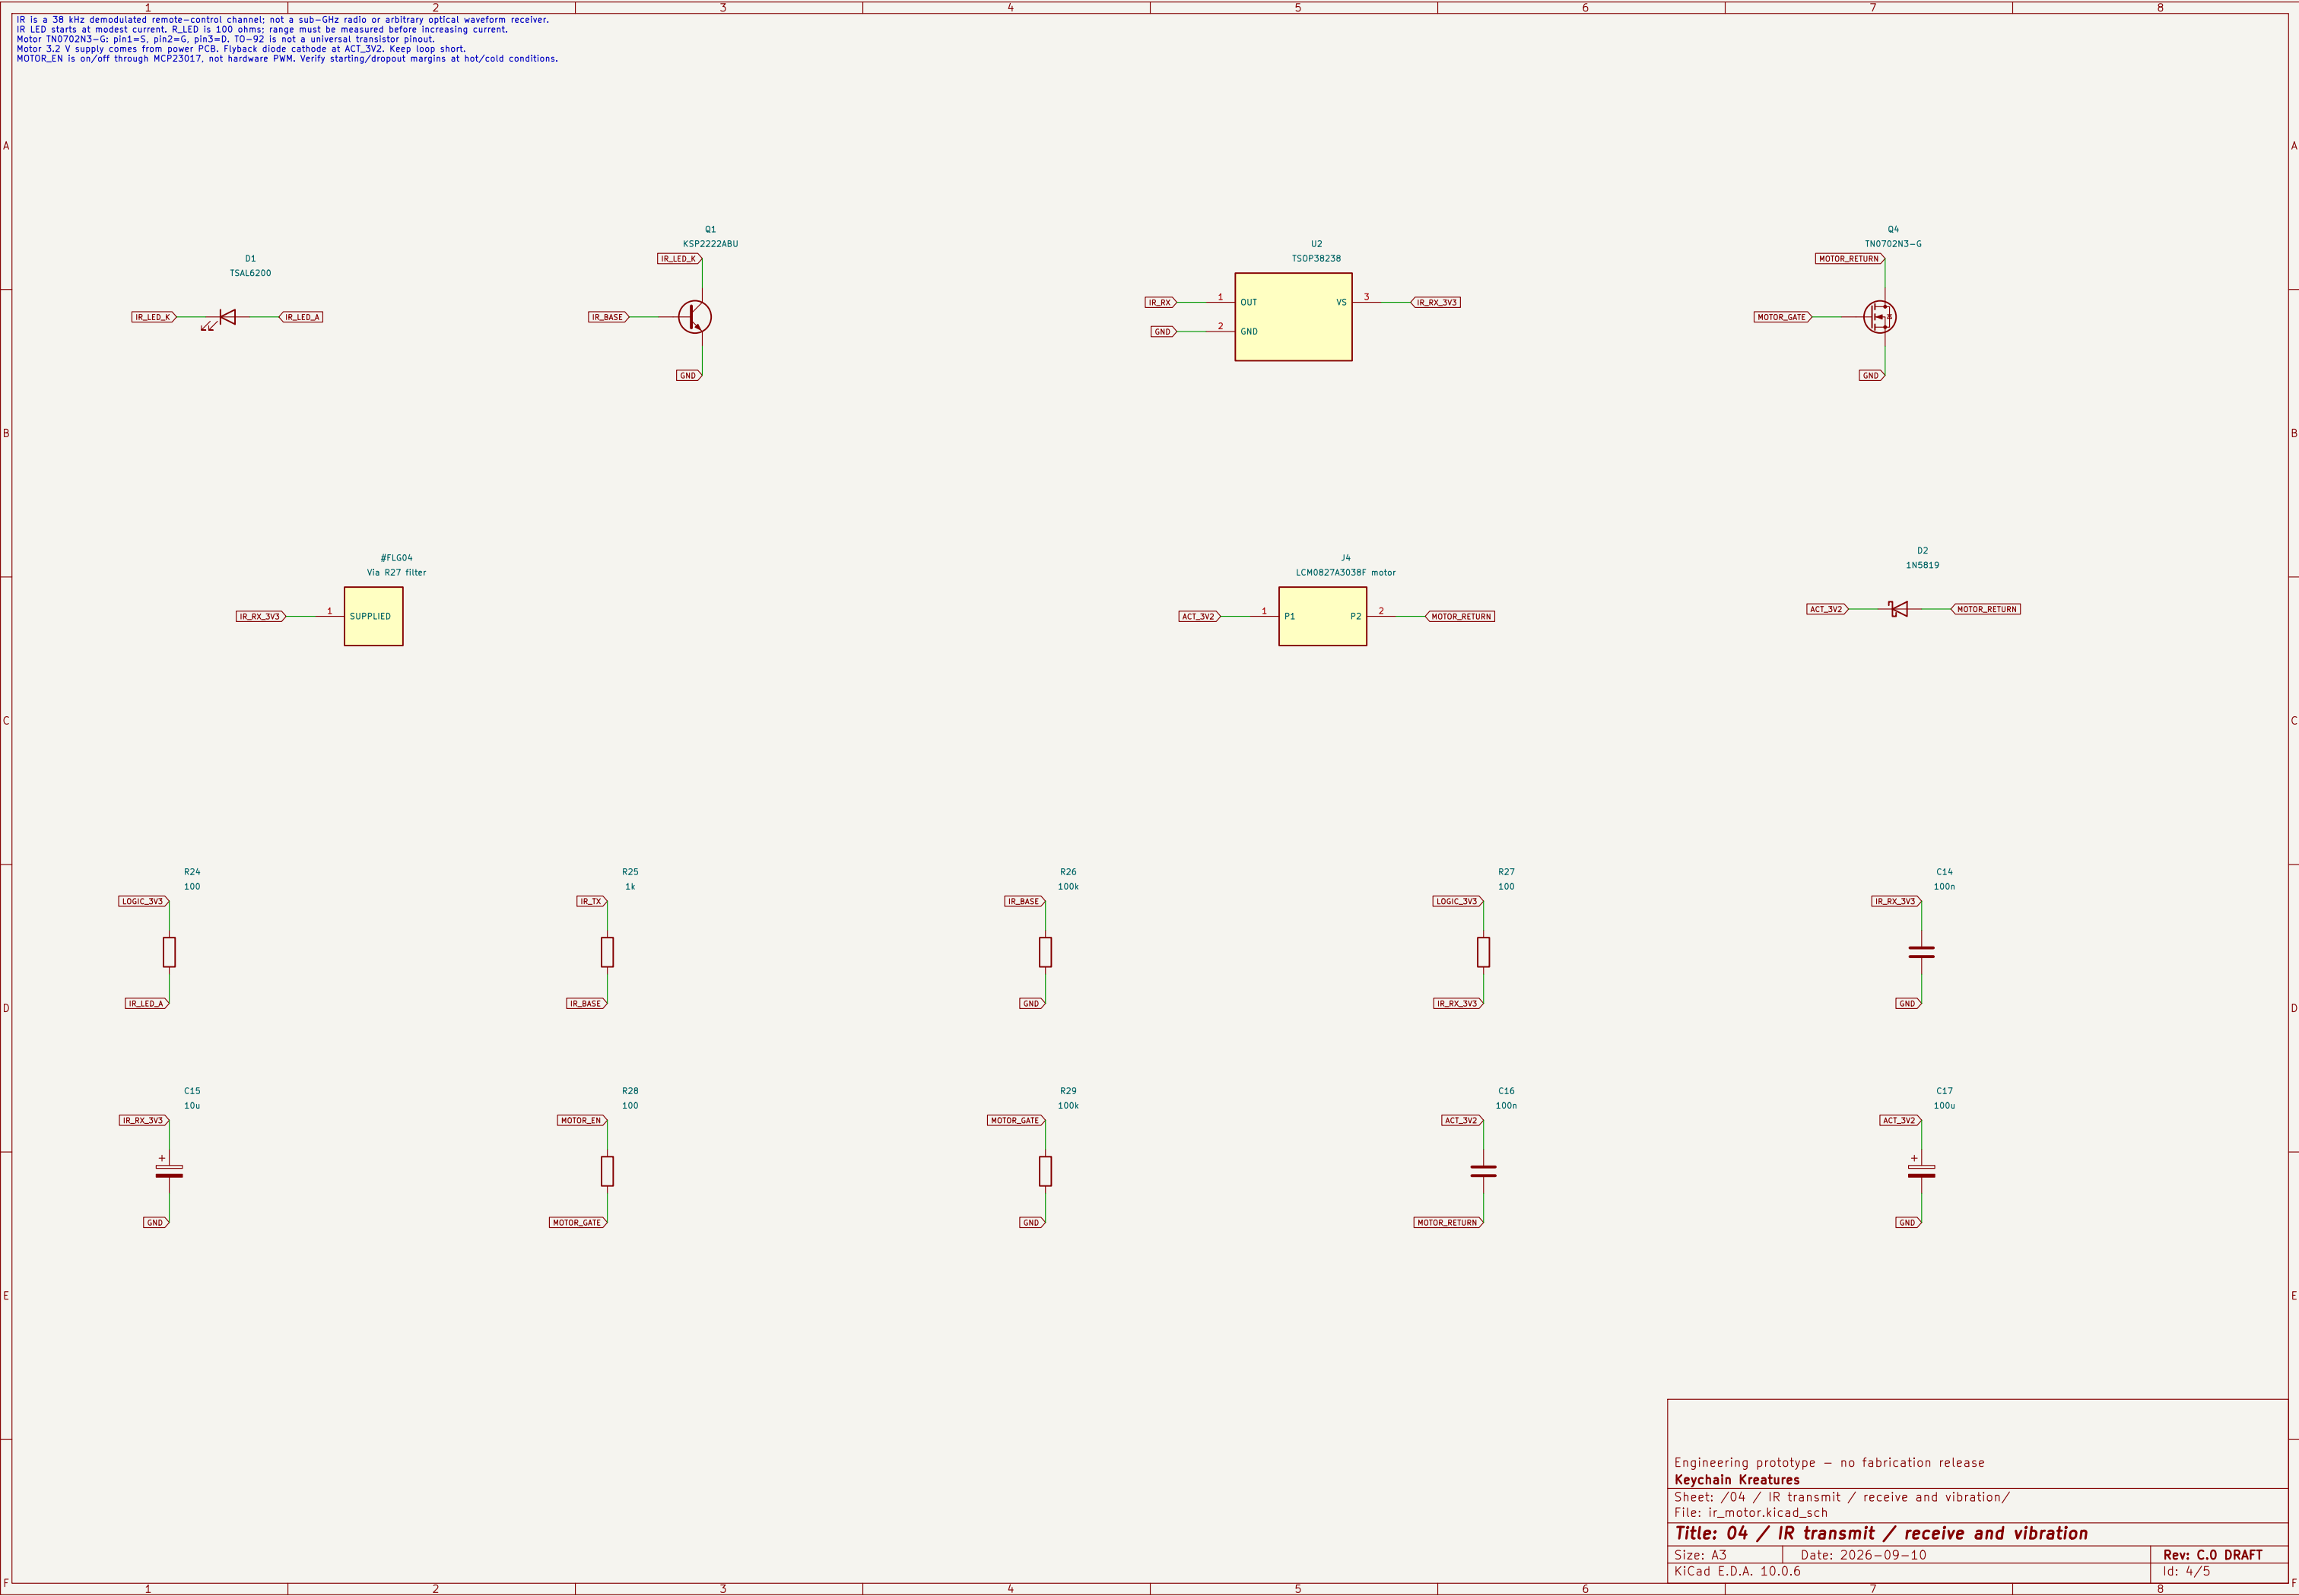

Engineering prototype – no fabrication release

Keychain Kreatures

Sheet: /04 / IR transmit / receive and vibration/

File: ir_motor.kicad_sch

Title: 04 / IR transmit / receive and vibration

Size: A3

Date: 2026-09-10

Rev: C.0 DRAFT

KiCad E.D.A. 10.0.6

Id: 4/5

UTC TDA2822 DIP8 bridge application, datasheet page 4. Speaker is floating: neither output goes to GND. Two RC low-pass stages, AC coupling and input attenuation. Start with low digital volume ≥ 200 KHz PWM carrier. AMP-EN high powers amplifier via PNC switch; low/off at reset. Stop PWM before off: ramp volume after setting. FS151P08-H3.0 wired 8-ohm speaker retained for prototype. Exact rating/acoustic qualification still outstanding. This is circuit capture and analytical review, NOT a full SPICE/firmware/acoustic simulation.