


SIDE A: electrically independent; no shared power or ground

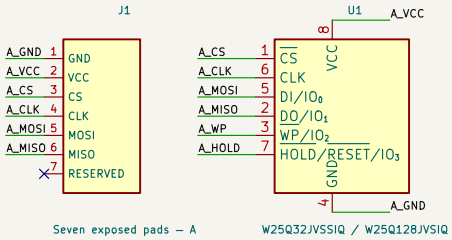

Seven exposed pads — A

W25Q32JVSSIQ / W25Q128JVSIQ





Supplied by drive

Supplied by drive

Single-bit SPI only; local pull-ups on CS#, WP#, HOLD#. Reserved pad unconnected.
Drive must isolate all contacts during movement. Only seated face may be powered.
All populated components on F.Cu: one stencil/reflow pass, including A/B media.

NOT FOR PRODUCTION: contact geometry / interlock unqualified

Sheet: /
File: cyber-disk-single-r0.kicad_sch

Title: Cyber Disk provisional R0 — independent SPI media

Size: A4	Date:	**Rev: R0**
KiCad E.D.A. 10.0.6		Id: 1/1