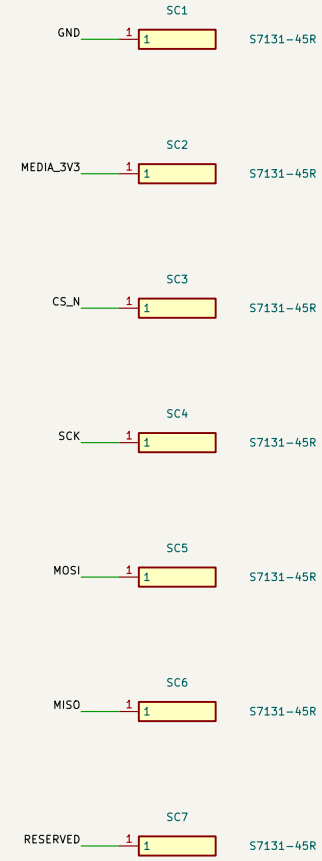




PASSIVE CONTACT BOARD: seven independent paths. Pin 7 reserved, routed to pigtail.
Connect ONLY to an isolated, switched 3.3 V media interface; NOT controller RO J3.
Contacts must be de-energized during movement. Main-board isolation is separate unfinished work.
Harwin S7131-45R: top-down compression part; sliding wear/snagging still requires bench testing.
Soldered springs. Replace complete screw-mounted cartridge or desolder individual contact.

Sheet: /
File: cyber-drive-contact-r1.kicad_sch

**Title: RODDY / passive contact cartridge**

| Size: A4 | Date: | **Rev: R1 / prototype** |
|---|---|---|
| KiCad E.D.A. 10.0.6 | | Id: 1/1 |