

SIDE A: electrically independent; no shared power or ground



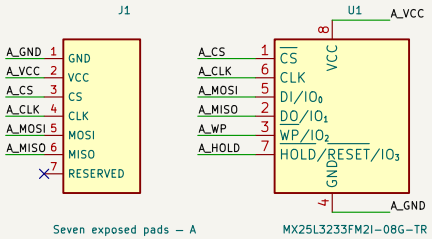



Single-bit SPI only; local pull-ups on CS#, WP#, HOLD#. Reserved pad unconnected.
Drive must isolate all contacts during movement. Only seated face may be powered.
All populated components on F.Cu: one stencil/reflow pass, including A/B media.

NOT FOR PRODUCTION: contact geometry / interlock unqualified

Sheet: /		
File: cyber-disk-single-r4.kicad_sch		
Title: Cyber Disk service R4 — independent SPI media		
Size: A4	Date:	**Rev: R4**
KiCad E.D.A. 10.0.6		Id: 1/1