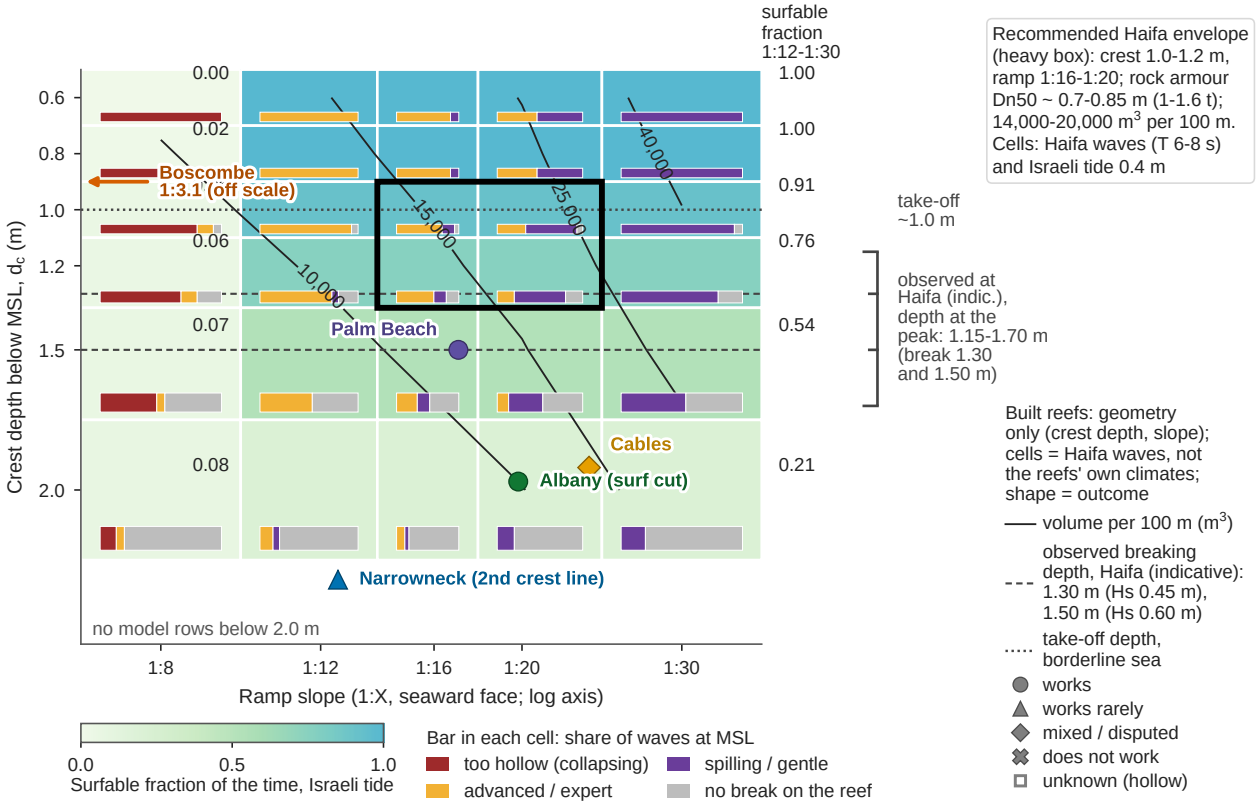
surfable fraction 1:12-1:30
Recommended Haifa envelope (heavy box): crest 1.0-1.2 m, ramp 1:16-1:20; rock armour Dn50 ~ 0.7-0.85 m (1-1.6 t); 14,000-20,000 m³ per 100 m. Cells: Haifa waves (T 6-8 s) and Israeli tide 0.4 m
0.00
0.02
0.06
0.07
0.08
1.00
1.00
0.91
0.76
0.54
0.21
take-off ~1.0 m
observed at Haifa (indic.), depth at the peak: 1.15-1.70 m (break 1.30 and 1.50 m)
Crest depth below MSL, d_c (m)
0.6
0.8
1.0
1.2
1.5
2.0
Boscombe 1:3.1 (off scale)
10,000
15,000
25,000
40,000
Palm Beach
Cables
Albany (surf cut)
Narrowneck (2nd crest line)
no model rows below 2.0 m
1:8
1:12
1:16
1:20
1:30
Ramp slope (1:X, seaward face; log axis)
Built reefs: geometry only (crest depth, slope); cells = Haifa waves, not the reefs' own climates; shape = outcome
volume per 100 m (m^3)
observed breaking depth, Haifa (indicative): 1.30 m (Hs 0.45 m), 1.50 m (Hs 0.60 m)
take-off depth, borderline sea
works
works rarely
mixed / disputed
does not work
unknown (hollow)
0.0
0.5
1.0
Surfable fraction of the time, Israeli tide
Bar in each cell: share of waves at MSL
too hollow (collapsing)
spilling / gentle
advanced / expert
no break on the reef