錡想 X 三重
遙控車電路設計圖說

目錄	
圖號	圖名
E-01	材料表
E-02	設備放置圖
E-03	繼電器板配置圖
E-04	系統單線圖
E-05	遙控器單線圖
------	附件

設備材料			
次項	項目	單位	數量
01	SG 90 Servo	個	1
02	18650 三串電池盒	個	1
03	ESP 32s	個	2
04	130 馬達	個	2
05	srd-03vdc-sl-c	個	4
06	c1815	個	4
07	180Ω 1/4w	個	4
08	雙軸按鍵搖桿模組	個	1
09	3*7 CM 單面 PCB板	個	1

比例	角法		專案名稱	圖號	圖號
		錡想設計	錡想 X 三重 專題式遙控車		1/5
設計師			圖名		
張立錡			材料表	E-01	

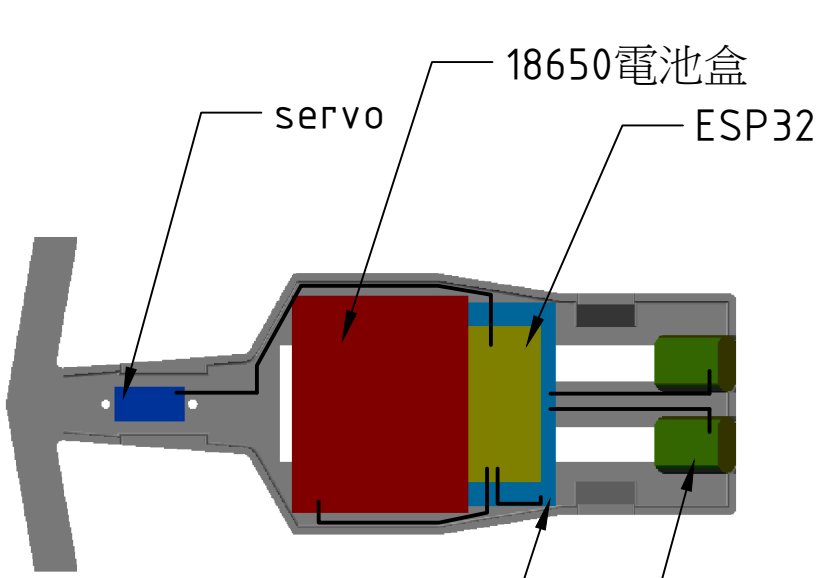

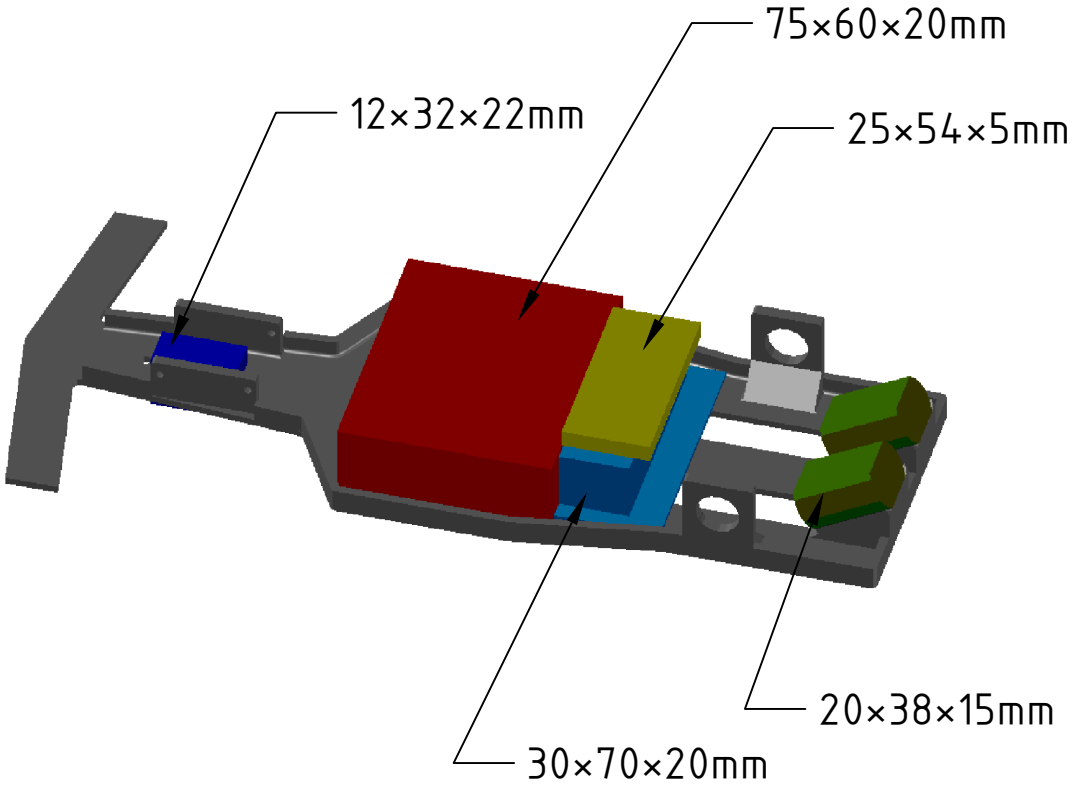

比例	角法		專案名稱	圖號	圖號
		錡想設計	錡想 X 三重 專題式遙控車		2/5
設計師			圖名	E-02	
張立錡			設備放置圖		

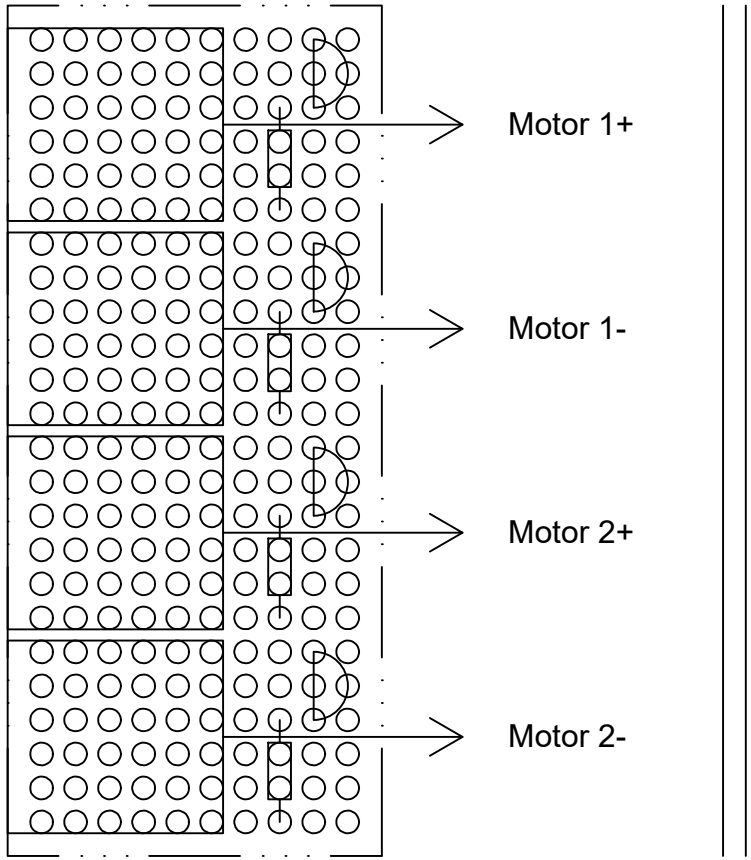

元件面

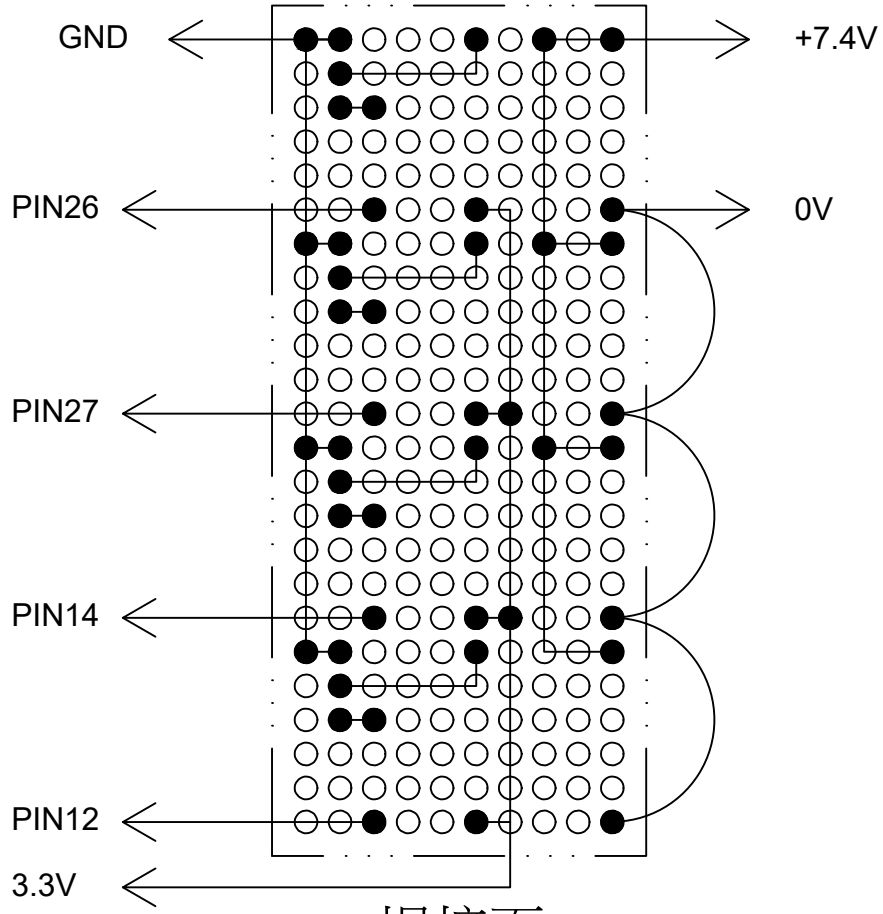

焊接面

比例	角法		專案名稱		圖號	圖號 3/5
		鎗想設計	鎗想 X 三重 專題式遙控車			
設計師			圖名		E-03	
張立鎗			繼電器板配置圖			

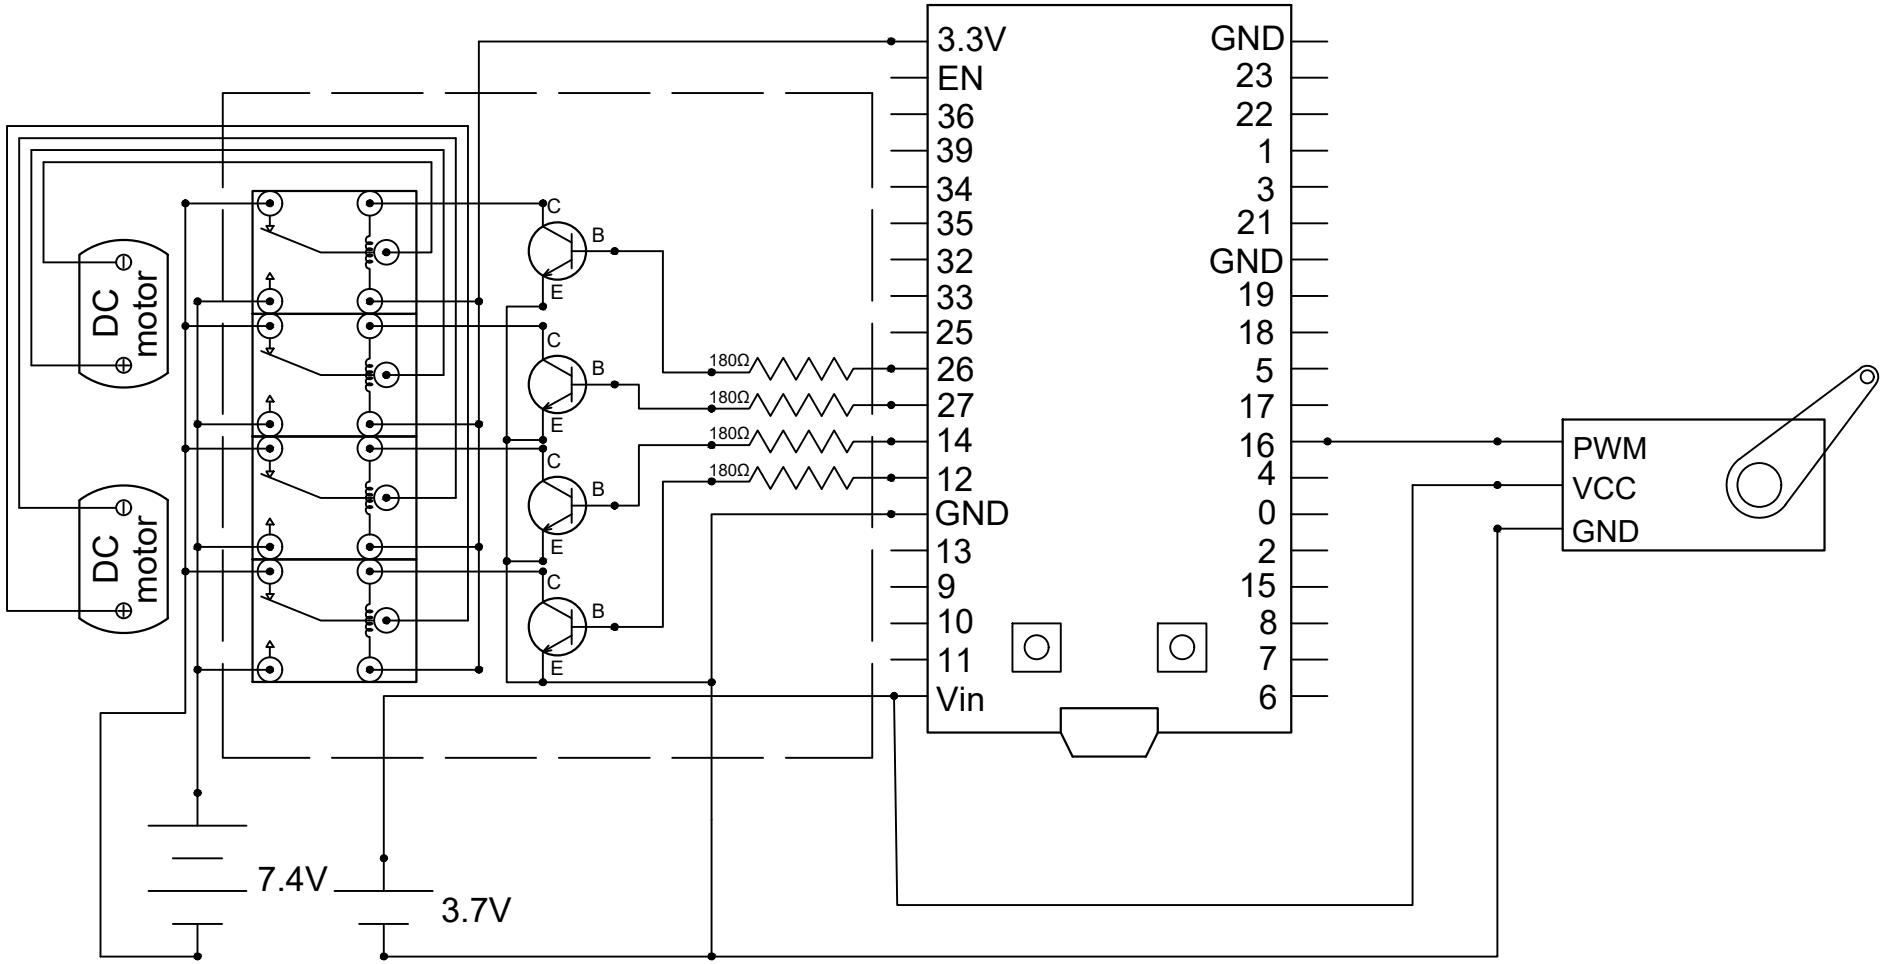

比例	角法	鎔想設計	專案名稱 鎔想 X 三重 專題式遙控車	圖號	圖號 4/5
設計師 張立鎔			圖名 系統單線圖	E-04	

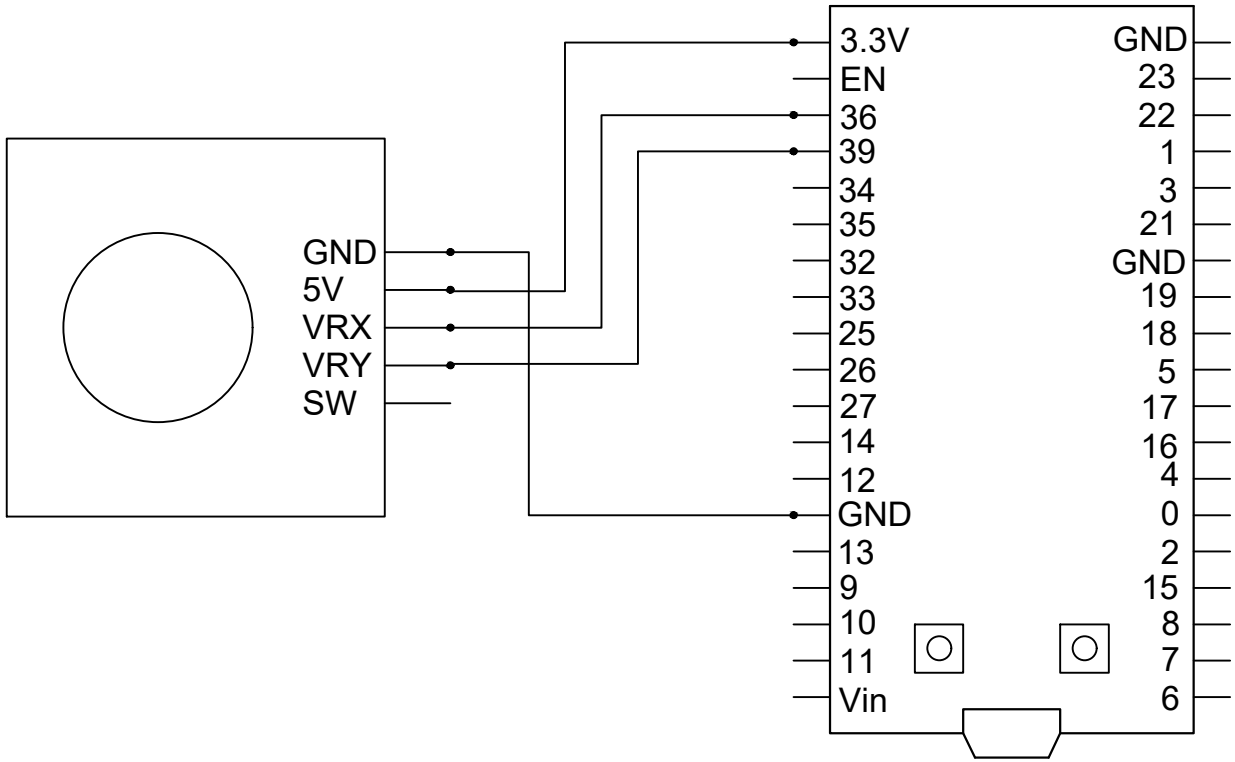

比例	角法		專案名稱	圖號	圖號
		錡想設計	錡想 X 三重 專題式遙控車		5/5
設計師			圖名		
張立錡			遙控器單線圖	E-05	

TOSHIBA TRANSISTOR SILICON NPN EPITAXIAL TYPE (PCT PROCESS)

2SC1815

AUDIO FREQUENCY GENERAL PURPOSE AMPLIFIER APPLICATIONS.
DRIVER STAGE AMPLIFIER APPLICATIONS.

- High Voltage and High Current
  : V_{CEO} = 50V (Min.), I_C = 150mA (Max.)
- Excellent h_{FE} Linearity
  : $h_{FE(2)}$ = 100 (Typ.) at V_{CE} = 6V, I_C = 150mA
  : h_{FE} (I_C = 0.1mA) / h_{FE} (I_C = 2mA) = 0.95 (Typ.)
- Low Noise : NF = 1dB (Typ.) at f = 1kHz
- Complementary to 2SA1015 (O, Y, GR class)

Unit in mm

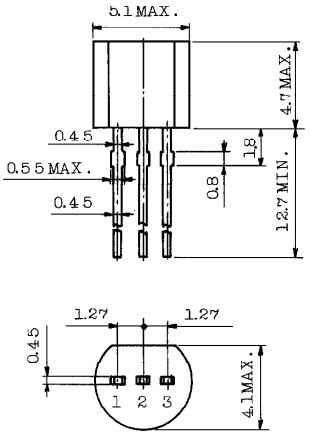

1. EMITTER
2. COLLECTOR
3. BASE

JEDEC	TO-92
EIAJ	SC-43
TOSHIBA	2-5F1B

Weight : 0.21g

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	60	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	150	mA
Base Current	I_B	50	mA
Collector Power Dissipation	P_C	400	mW
Junction Temperature	T_j	125	°C
Storage Temperature Range	T_{stg}	−55~125	°C

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	V_{CB} = 60V, I_E = 0	—	—	0.1	μA
Emitter Cut-off Current	I_{EBO}	V_{EB} = 5V, I_C = 0	—	—	0.1	μA
DC Current Gain	$h_{FE(1)}$ (Note)	V_{CE} = 6V, I_C = 2mA	70	—	700	
	$h_{FE(2)}$	V_{CE} = 6V, I_C = 150mA	25	100	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C = 100mA, I_B = 10mA	—	0.1	0.25	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	I_C = 100mA, I_B = 10mA	—	—	1.0	V
Transition Frequency	f_T	V_{CE} = 10V, I_C = 1mA	80	—		MHz
Collector Ouput Capacitance	C_{ob}	V_{CB} = 10V, I_E = 0, f = 1MHz	—	2.0	3.5	pF
Base Intrinsic Resistance	$r_{bb'}$	V_{CE} = 10V, I_E = −1mA f = 30MHz	—	50	—	Ω
Noise Figure	NF	V_{CE} = 6V, I_C = 0.1mA f = 1kHz, R_G = 10kΩ	—	1.0	10	dB

Note : h_{FE} Classification O : 70~140 Y : 120~240 GR : 200~400 BL : 350~700

961001EAA2

SONGLE RELAY

松乐继电器 ® SONGLE RELAY	RELAY ISO9002	SRD

1. MAIN FEATURES

- Switching capacity available by 10A in spite of small size design for highdensity P.C. board mounting technique.
- UL,CUL,TUV recognized.
- Selection of plastic material for high temperature and better chemical solution performance.
- Sealed types available.
- Simple relay magnetic circuit to meet low cost of mass production.

2. APPLICATIONS

- Domestic appliance, office machine, audio, equipment, automobile, etc.
  (Remote control TV receiver, monitor display, audio equipment high rushing current use application.)

3. ORDERING INFORMATION

SRD	XX VDC	S	L	C
Model of relay	Nominal coil voltage	Structure	Coil sensitivity	Contact form
SRD	03、05、06、09、12、24、48VDC	S:Sealed type	L:0.36W	A:1 form A
				B:1 form B
		F:Flux free type	D:0.45W	C:1 form C

4. RATING

CCC	FILE NUMBER:CH0052885-2000	7A/240VDC
CCC	FILE NUMBER:CH0036746-99	10A/250VDC
UL /CUL	FILE NUMBER: E167996	10A/125VAC 28VDC
TUV	FILE NUMBER: R9933789	10A/240VAC 28VDC

5. DIMENSION(unit:mm) DRILLING(unit:mm) WIRING DIAGRAM

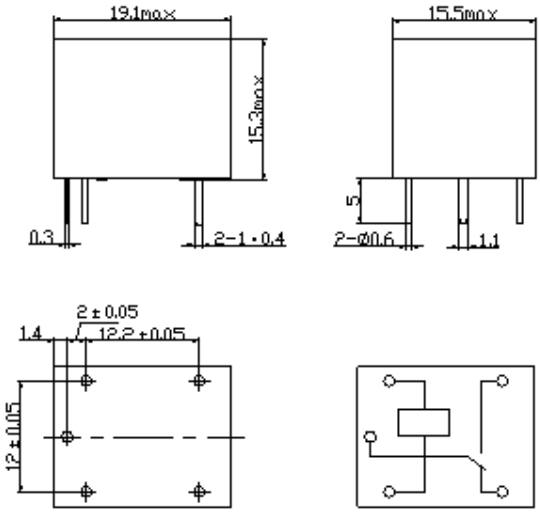

6. COIL DATA CHART (AT20°C)

Coil Sensitivity	Coil Voltage Code	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω) ±10%	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max-Allowable Voltage (VDC)
SRD (High Sensitivity)	03	03	120	25	abt. 0.36W	75%Max.	10% Min.	120%
	05	05	71.4	70				
	06	06	60	100				
	09	09	40	225				
	12	12	30	400				
	24	24	15	1600				
	48	48	7.5	6400				
SRD (Standard)	03	03	150	20	abt. 0.45W	75% Max.	10% Min.	110%
	05	05	89.3	55				
	06	06	75	80				
	09	09	50	180				
	12	12	37.5	320				
	24	24	18.7	1280				
	48	48	10	4500	abt. 0.51W			

7. CONTACT RATING

Item \ Type	SRD	
	FORM C	FORM A
Contact Capacity Resistive Load (cosΦ=1)	7A 28VDC 10A 125VAC 7A 240VAC	10A 28VDC 10A 240VAC
Inductive Load (cosΦ=0.4 L/R=7msec)	3A 120VAC 3A 28VDC	5A 120VAC 5A 28VDC
Max. Allowable Voltage	250VAC/110VDC	250VAC/110VDC
Max. Allowable Power Force	800VAC/240W	1200VA/300W
Contact Material	AgCdO	AgCdO

8. PERFORMANCE (at initial value)

Item \ Type	SRD
Contact Resistance	100mΩ Max.
Operation Time	10msec Max.
Release Time	5msec Max.
Dielectric Strength Between coil & contact Between contacts	 1500VAC 50/60HZ (1 minute) 1000VAC 50/60HZ (1 minute)
Insulation Resistance	100 MΩ Min. (500VDC)
Max. ON/OFF Switching Mechanically Electrically	 300 operation/min 30 operation/min
Ambient Temperature	-25°C to +70°C
Operating Humidity	45 to 85% RH
Vibration Endurance Error Operation	 10 to 55Hz Double Amplitude 1.5mm 10 to 55Hz Double Amplitude 1.5mm
Shock Endurance Error Operation	 100G Min. 10G Min.
Life Expectancy Mechanically Electrically	 10^7 operations. Min. (no load) 10^5 operations. Min. (at rated coil voltage)
Weight	abt. 10grs.

9.REFERENCE DATA

Coil Temperature Rise



Operation Time



Life Expectancy

AC120V/DC24V cosΦ=1



Life Expectancy