

# PRODUCT CATALOGUE

## ZOFANDE

Innovation in Energy Powers a Brighter Future





Located in Yueqing, Wenzhou, Zhejiang — China's famous electrical industry hub, ZOFANDE boasts superior industrial clusters and complete supply chains. We focus on R&D, intelligent manufacturing and service of power transmission & distribution equipment and new energy charging devices.

Our main products are intelligent charging piles and box-type transformers, which strictly follow national standards. Widely used in industrial parks, urban infrastructure, new energy stations and residential areas, they are safe, stable, efficient and highly adaptable. We also supply full-series power transmission and distribution products to meet diverse market demands.

Grasping dual-carbon development opportunities, we stick to traditional industry upgrading and new energy innovation, develop land-water integrated charging solutions and expand green energy applications.

We attach great importance to technological research and industry standard formulation, constantly optimize products to keep advanced performance and stable quality.

Upholding the core concepts of quality, innovation and service, ZOFANDE devotes itself to power and new energy charging fields. We deliver professional, reliable and eco-friendly overall power solutions, aiming to be your trusted partner in the new energy power industry.



## Catalogue

Company Profile————— P01

Intelligent Charging Solution ————— P04

AC Charger Series ————— P05

DC Charger Series————— P09


Prefabricated Substation————— P14

Certifications————— P18

Real cases————— P19



### Zofande New Energy Group Power Transmission & Distribution and New Energy Charging Solutions

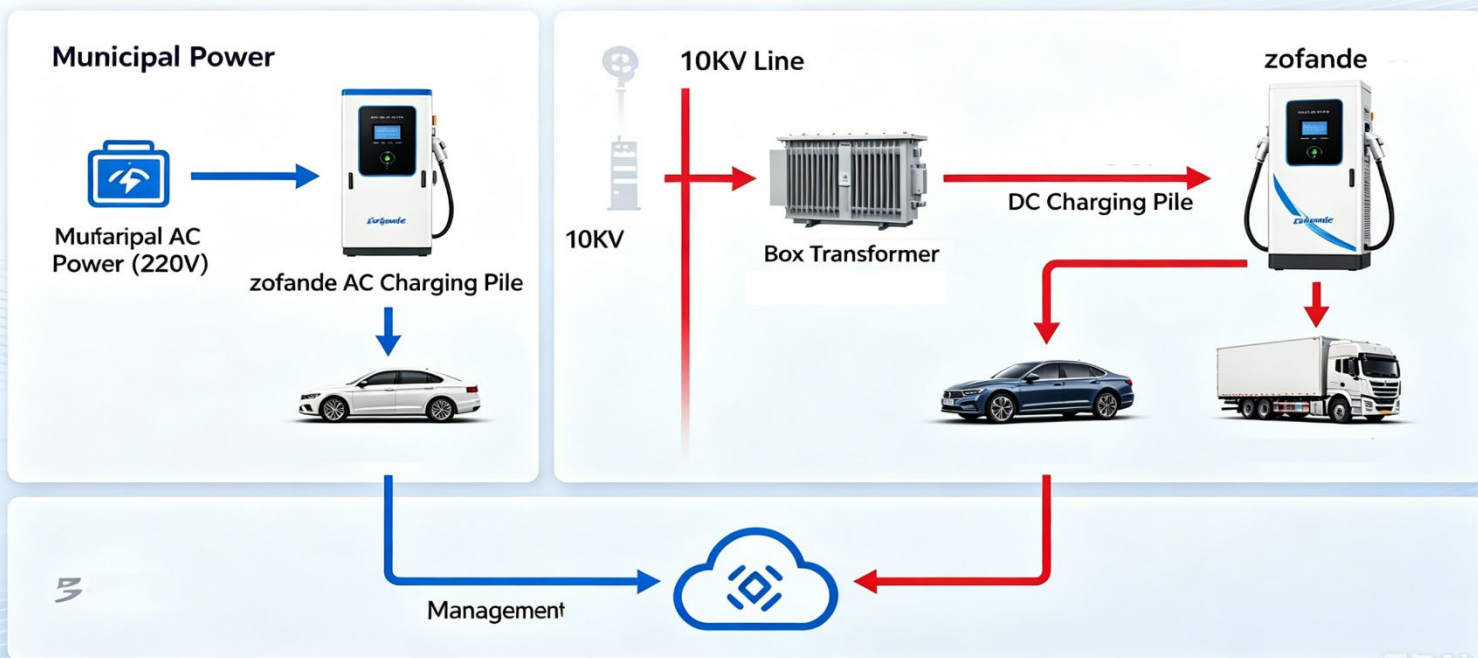

豆包AI生成

### Electric Heavy Truck Long - Distance Transportation Energy - Supplement Route Map



豆包AI生成



**AC CHARGING  
SERIES**

中帆德新能源

中帆德新能源

### 3.5kW/7kW

#### Portable AC Charging Station



J1772(Type1) IEC62196(Type2) GB/T 20234

### PARAMETERS

| GB/T                 | ZFD-AC-3.5kW                                                                                 | ZFD-AC-7kW |
|----------------------|----------------------------------------------------------------------------------------------|------------|
| Input Voltage        | AC220V±15%;50Hz                                                                              |            |
| Input Current        | 16A                                                                                          | 32A        |
| Rated Power          | 3.5kW                                                                                        | 7kW        |
| Product Dimension    | 221*98*58mm                                                                                  |            |
| HMI                  | 2.8- inch LED                                                                                |            |
| Starting Mode        | Plug and Charge                                                                              |            |
| Protection Grade     | IP54                                                                                         |            |
| Protection Functions | Short circuit, overcurrent, overtemperature, leakage, overvoltage & undervoltage protection, |            |
| Working Environment  | Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity ≤95%, non-condensing                          |            |
| Type2                |                                                                                              |            |
| Input Voltage        | AC230±15%;50Hz                                                                               |            |
| Input Current        | 16A                                                                                          | 32A        |
| Rated Power          | 3.5kW                                                                                        | 7kW        |
| Product Dimension    | 221*98*58mm                                                                                  |            |
| HMI                  | 2.8- inch LED                                                                                |            |
| Starting Mode        | Plug and Charge                                                                              |            |
| Protection Grade     | IP54                                                                                         |            |
| Protection Functions | Short circuit, overcurrent, overtemperature, leakage, overvoltage & undervoltage protection, |            |
| Working Environment  | Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity ≤95%, non-condensing                          |            |
| Type1/Nacs           |                                                                                              |            |
| Input Voltage        | AC240±15%;60Hz                                                                               |            |
| Input Current        | 16A                                                                                          | 32A        |
| Rated Power          | 3.5kW                                                                                        | 7kW        |
| Product Dimension    | 221*98*58mm                                                                                  |            |
| HMI                  | 2.8- inch LED                                                                                |            |
| Starting Mode        | Plug and Charge                                                                              |            |
| Protection Grade     | IP54                                                                                         |            |
| Protection Functions | Short circuit, overcurrent, overtemperature, leakage, overvoltage & undervoltage protection, |            |



overvoltage protection



undervoltage protection



lightning protection



IP54



overcurrent protection



overtemperature protection



IK10

### 7kW/14kW/22kW

Wall-mounted / Floor-standing  
AC Charging Station

Metal Enclosure



J1772 (Type1) IEC62196 (Type2) GB/T 20234

## PARAMETERS

### GB/T

Input Voltage  
Input Current  
Rated Power  
Product Dimension  
HMI  
Starting Mode  
Protection Grade  
Protection Functions  
  
Working Environment

### ZFD-AC-7kW

AC220V±15%; 50Hz  
16A/32A  
7kW  
295\*195\*95.5 mm  
4.3-inch LED  
Card Swiping / Code Scanning / Password  
IP54  
Short circuit, overcurrent, overtemperature, leakage, overvoltage & undervoltage protection, Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity ≤95%, non-condensing

### Type2

Input Voltage  
Input Current  
Rated Power  
Product Dimension  
HMI  
Starting Mode  
Protection Grade  
Protection Functions  
  
Working Environment

### ZFD-AC-7kW | ZFD-AC-11kW | ZFD-AC-22kW

AC230V±15%/AC400V±15%; 50Hz  
16A/32A  
7kW | 11kW | 22kW  
295\*195\*95.5 mm  
4.3-inch LED  
Card Swiping / Code Scanning / Password  
IP54  
Short circuit, overcurrent, overtemperature, leakage, overvoltage & undervoltage protection, Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity ≤95%, non-condensing

### Type1/Nacs

Input Voltage  
Input Current  
Rated Power  
Product Dimension  
HMI  
Starting Mode  
Protection Grade  
Protection Functions  
  
Working Environment

AC240±15%; 60Hz  
16A/32A/40A  
3.8kW | 7.6kW | 9.6kW  
295\*195\*95.5 mm  
4.3-inch LED  
Card Swiping / Code Scanning / Password  
IP54  
Short circuit, overcurrent, overtemperature, leakage, overvoltage & undervoltage protection, Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity ≤95%, non-condensing



overvoltage protection



undervoltage protection



lightning protection



IP54



overcurrent protection



overtemperature protection



IK10

### PARAMETERS

7kW/14kW/22kW

Wall-mounted / Floor-standing  
AC Charging Station

Plastic Enclosure



J1772(Type1) IEC62196(Type2) GB/T 20234

#### GB/T

Input Voltage  
Input Current  
Rated Power  
Product Dimension  
HMI  
Starting Mode  
Protection Grade  
Protection Functions

Working Environment

#### ZFD-AC-7kW

AC220V±15%; 50Hz  
16A/32A  
7kW

295\*195\*95.5 mm  
4.3-inch LED

Card Swiping / Code Scanning / Password

IP54

Short circuit, overcurrent, overtemperature,  
leakage, overvoltage & undervoltage protection,  
Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity  
≤95%, non-condensing

#### Type2

Input Voltage  
Input Current  
Rated Power  
Product Dimension  
HMI  
Starting Mode  
Protection Grade  
Protection Functions

Working Environment

#### ZFD-AC-7kW | ZFD-AC-11kW | ZFD-AC-22kW

AC230V±15%/AC400V±15%; 50Hz

16A/32A  
7kW | 11kW | 22kW

295\*195\*95.5 mm  
4.3-inch LED

Card Swiping / Code Scanning / Password

IP54

Short circuit, overcurrent, overtemperature,  
leakage, overvoltage & undervoltage protection,  
Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity  
≤95%, non-condensing

#### Type1/Nacs

Input Voltage  
Input Current  
Rated Power  
Product Dimension  
HMI  
Starting Mode  
Protection Grade  
Protection Functions

Working Environment

AC240±15%; 60Hz

16A/32A/40A  
3.8kW | 7.6kW | 9.6kW

295\*195\*95.5 mm  
4.3-inch LED

Card Swiping / Code Scanning / Password

IP54

Short circuit, overcurrent, overtemperature,  
leakage, overvoltage & undervoltage protection,  
Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity  
≤95%, non-condensing



overvoltage  
protection



undervoltage  
protection



lightning  
protection



IP54



overcurrent  
protection



overtemperature  
protection



IK10






### 20kW/30kW/40kW

#### Wall-mounted / Floor-standing DC Charging Station

□ Compact DC charging piles support wall-mounted and floor-mounted installation styles with flexible layout, widely applicable to residential communities, office parks, shopping mall parking lots and other places.

□ This series features compact structure and wide adaptability, suitable for daily fast charging of private passenger vehicles and light commercial vehicles. It is also ideal for building convenient charging networks at township stations and enterprise internal parking lots.



| Model                 | ZFD-DC-20kW | ZFD-DC-30kW                                                         | ZFD-DC-40kW |
|-----------------------|-------------|---------------------------------------------------------------------|-------------|
| Input Voltage         |             | AC380V±15%                                                          |             |
| Rated Power           | 20kW        | 30kW                                                                | 40kW        |
| Output Voltage        |             | DC200~1000V                                                         |             |
| Output Current        |             | 0-100A                                                              |             |
| Input Frequency       |             | 50Hz±10%                                                            |             |
| Product Dimensions    |             | 750*600*256mm                                                       |             |
| Cable Length          |             | 5M                                                                  |             |
| Conversion Efficiency |             | ≥97%                                                                |             |
| Charging Mode         |             | Automatic/fixed power/fixed time                                    |             |
| HMI                   |             | 4.3-inch LED                                                        |             |
| Start Mode            |             | Card Swiping / Code Scanning / Password                             |             |
| Protection Grade      |             | IP54                                                                |             |
| Working Environment   |             | Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity ≤95%, non-condensing |             |
| Executive Standard    |             | GB/T18487; GB/T20234; IEC61851; IEC62196;                           |             |



overvoltage protection



undervoltage protection



lightning protection



IP54




overcurrent protection



overtemperature protection




IK10

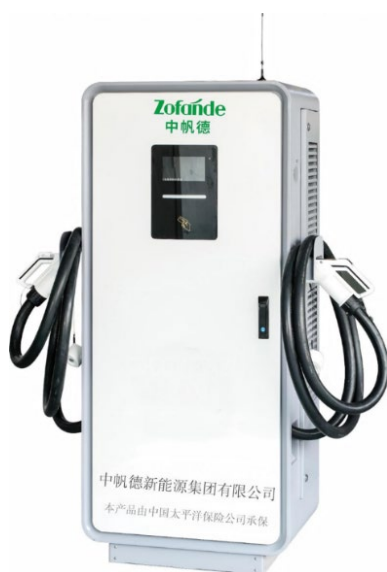

### 60kW

#### DC Charging Station

- The 60kW DC charging pile delivers high charging efficiency and wide site adaptability, mainly deployed in urban public charging stations, highway service areas, industrial parks and other mainstream charging zones.
- It boasts stable overall performance and powerful fast charging capacity, meeting rapid power supplement demands of new energy private cars, online-hailing vehicles, light commercial vehicles and other models, perfectly suitable for large-scale centralized charging scenarios.

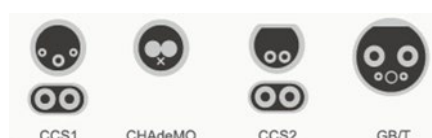

| Model                 | ZFD-DC-60KW                                                         |
|-----------------------|---------------------------------------------------------------------|
| Input Voltage         | AC380V±15%                                                          |
| Rated Power           | 60kW                                                                |
| Output Voltage        | DC200~1000V                                                         |
| Output Current        | 0-200A                                                              |
| Input Frequency       | 50Hz±10%                                                            |
| Product Dimensions    | 1500*700*500mm                                                      |
| Cable Length          | 5M                                                                  |
| Conversion Efficiency | ≥97%                                                                |
| Charging Mode         | Automatic/fixed power/fixed time                                    |
| HMI                   | 7-inch LED                                                          |
| Start Mode            | Card Swiping / Code Scanning / Password                             |
| Protection Grade      | IP54                                                                |
| Working Environment   | Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity ≤95%, non-condensing |
| Executive Standard    | GB/T18487; GB/T20234; IEC61851; IEC62196;                           |



overvoltage  
protection



undervoltage  
protection



lightning  
protection



IP54




overcurrent  
protection



overtemperature  
protection




IK10

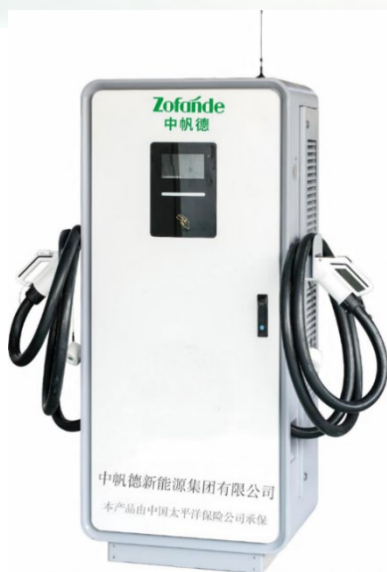

### 120kW-480kW

#### DC Charging Station

- 120kW to 480kW high-power DC charging piles feature fast charging speed and strong output power, suitable for large centralized charging sites such as highway service areas, large public charging stations and logistics parks.
- Fully compatible with new energy passenger cars, online car-hailing vehicles, heavy trucks, engineering vehicles and other models, it meets the high-efficiency fast charging demands for long-distance travel and operational vehicles.

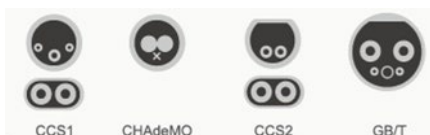

| Model                 | ZFD-DC-(120kW/160kW)                                                | ZFD-DC-(240kW-480kW)    |
|-----------------------|---------------------------------------------------------------------|-------------------------|
| Input Voltage         | AC380V±15%                                                          |                         |
| Rated Power           | 120kW/160kW                                                         | 240kW/300kW/360kW/480kW |
| Output Voltage        | DC200~1000V                                                         |                         |
| Output Current        | 0-250A                                                              | 0-300A                  |
| Input Frequency       | 50Hz±10%                                                            |                         |
| Product Dimensions    | 1900*650*800mm                                                      |                         |
| Cable Length          | 5M/7M                                                               |                         |
| Conversion Efficiency | ≥97%                                                                |                         |
| Charging Mode         | Automatic/fixed power/fixed time                                    |                         |
| HMI                   | 7-inch LED                                                          |                         |
| Start Mode            | Card Swiping / Code Scanning / Password                             |                         |
| Protection Grade      | IP54                                                                |                         |
| Working Environment   | Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity ≤95%, non-condensing |                         |
| Executive Standard    | GB/T18487; GB/T20234; IEC61851; IEC62196;                           |                         |



overvoltage protection



undervoltage protection



lightning protection



IP54



overcurrent protection



overtemperature protection



IK10

### 240kW-2MW

#### Flexible Charging Stack



□ It is widely used in public charging stations, highway service areas, logistics parks and commercial vehicle stations to meet fast charging demands of various new energy vehicles.

□ It realizes dynamic power distribution, improves equipment utilization and effectively cuts down overall operation costs.

| Model                 | ZFD-DC-(480kW-2.5MW)                                                |
|-----------------------|---------------------------------------------------------------------|
| Input Voltage         | AC380V±15%                                                          |
| Rated Power           | 240kW/360kW/480kW/720kW/1440kW/2MW                                  |
| Output Voltage        | DC200~1000V                                                         |
| Output Current        | 0-600A                                                              |
| Input Frequency       | 50Hz±10%                                                            |
| Product Dimensions    | 2200*1000*800mm                                                     |
| Cable Length          | 5M                                                                  |
| Conversion Efficiency | ≥97%                                                                |
| Charging Mode         | Automatic/fixed power/fixed time                                    |
| HMI                   | 7-inch LED                                                          |
| Start Mode            | Card Swiping / Code Scanning / Password                             |
| Protection Grade      | IP54                                                                |
| Working Environment   | Altitude ≤ 4000m; Temp: -20°C ~ 50°C; Humidity ≤95%, non-condensing |
| Executive Standard    | GB/T18487; GB/T20234; IEC61851; IEC62196;                           |



overvoltage  
protection



undervoltage  
protection



lightning  
protection



IP54



overcurrent  
protection



overtemperature  
protection



IK10



## YB-12

### Outdoor Prefabricated Substation




#### Overview

YB-12/0.4 outdoor prefabricated substation (European type) is widely used in urban power grid transformation, residential,

- High and low voltage protection and low-voltage switchgear are integrated into one, with strong sets;
- High and low voltage switchgear, operation is safe and reliable;
- High and low voltage protection is perfect, maintenance cycle, and maintenance is simple;
- Less land occupation, low investment, short production cycle and convenient movement;
- Flexible wiring schemes;
- Unique structure: The unique honeycomb structure double-layer (composite panel) shell is firm, heat-insulating

#### Model Definition

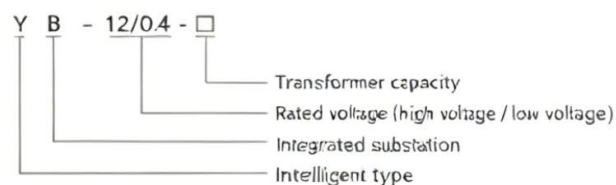

### Transformer

The intelligent integrated substation adopts low-loss, oil-immersed, fully-sealed S9, S10, S11 series transformers. Eco-friendly dry-type transformers with resin insulation or NOMEX paper insulation are also optional. The bottom can be equipped with trolleys for easy transformer access.

### High-Voltage Side

Protected by a load switch-fuse combination. If one phase of the fuse blows, the three-phase linkage trips. The load switch is available in pressure gas, vacuum, and SF<sub>6</sub> types, and can be equipped with an electric operating mechanism for automation upgrades. The fuse is a high-voltage current-limiting type with a striker, ensuring reliable operation and high breaking capacity (main technical parameters are shown in the table below). For transformers above 800kVA, vacuum circuit breakers such as ZN12, ZN28, and VS1 can be used for protection.

### Low-Voltage Side

The main switch on the low-voltage side uses a universal or intelligent circuit breaker for selective protection. Outgoing switches use new molded-case switches with small size and short arc extinction, supporting up to 30 circuits. The intelligent automatic tracking reactive power compensation device is available with two switching methods: contactor-based and contactless, for user selection.

### Load Switch Technical Parameters

| Item                                | Unit  | FKN12-12 | FZN25-12 |
|-------------------------------------|-------|----------|----------|
| Rated Voltage                       | kV    | 10       | 10       |
| Maximum Working Voltage             | kV    | 12       | 12       |
| Rated Frequency                     | Hz    | 50       | 50       |
| Rated Current                       | A     | 630      | 630      |
| Rated Breaking Load Current         | A     | 630      | 630      |
| Thermal Stability Current (RMS)     | kA/s  | 20/2     | 20/4     |
| Dynamic Stability Current           | kA    | 50       | 50       |
| Short-Time Making Current (Peak)    | kA    | 50       | 50       |
| Full Load Breaking Cycles           | times | 20       | 10000    |
| Mechanical Life                     | times | 2000     | 10000    |
| 1min Power Freq. Withstand Voltage  | kV    | 42       | 42       |
| Lightning Impulse Withstand Voltage | kV    | 75       | 75       |

### High-Voltage Fuse Technical Parameters

| Model   |          | Rated Voltage (kV) | Breaking Current (A) | Breaking Capacity (kA) | Rated Fuse Element Current (A) |
|---------|----------|--------------------|----------------------|------------------------|--------------------------------|
| Oversea | Domestic |                    |                      |                        |                                |
| SDL※J   |          | 12                 | 40                   | 31.5                   | 6.3, 10, 16, 20, 25, 31.5, 40  |
| SFL※J   | XRNT-12  | 12                 | 100                  | 31.5                   | 50, 63, 71, 80, 100            |
| SKL※J   |          | 12                 | 125                  | 31.5                   | 125                            |

## YB(ZGS)-12 Prefabricated Substation (American Style)

Prefabricated substation (American style)




### Overview

Developed with advanced international technologies and adapted for domestic use, it features compact design, easy maintenance, low noise/loss, anti-theft, strong overload capacity, and full protection. Ideal for residential areas, parks, construction sites, airports, etc. Suitable for 10kV ring/dual/terminal power systems, performing transformation, metering, compensation, and protection functions.

Compliant with:







- GB/T 17467-1998
- DL/T 537-93

### Model Meaning

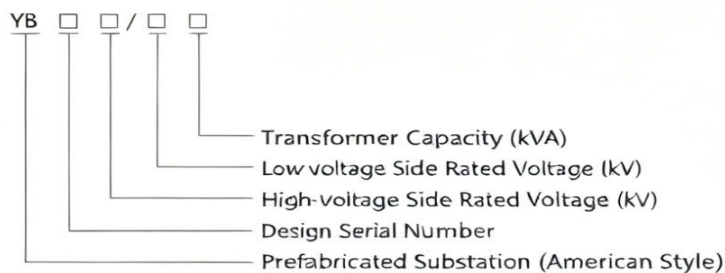



### Real cases



## ZOFANDE NEW ENERGY GROUP CO., LTD

Address: No: 77 Jingshi Road, Economic Development Zone, Yueqing City, Wenzhou City, Zhejiang Province  
Tel: 13601670499

Website: [www.en.chzfd.com](http://www.en.chzfd.com)