

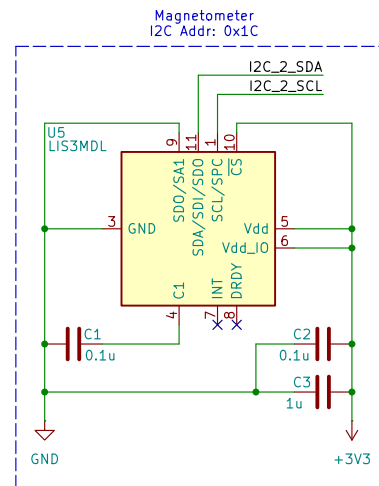
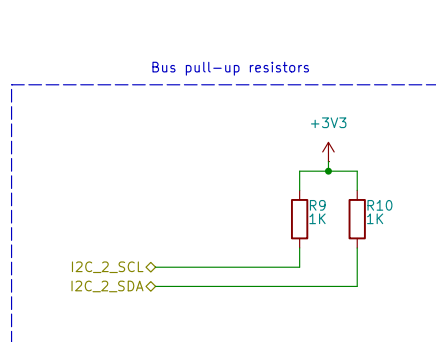
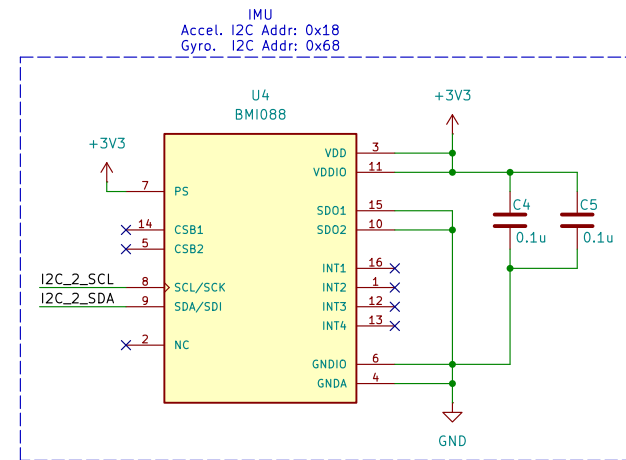
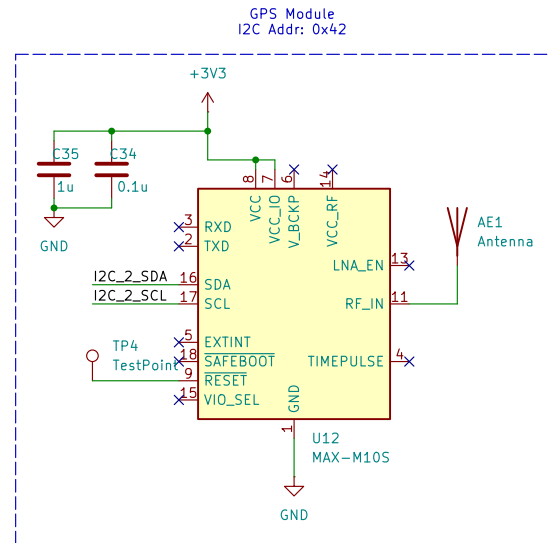


Bus speed 1MHz (Fast Mode+)

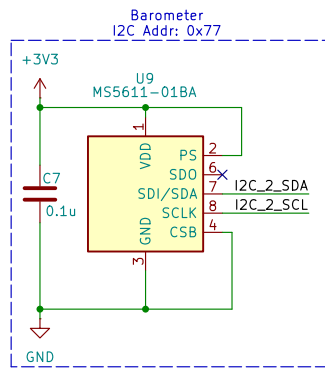


Bus speed 400kHz (Fast Mode)

### Ideal Diode (Power-OR)

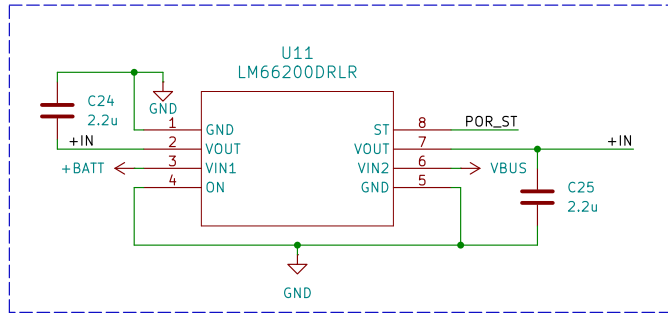

Power monitor w/ external shunt

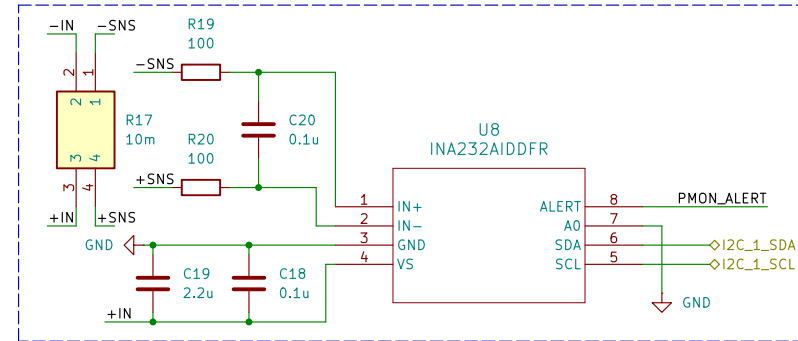

PMON\_ALERT is  
open-drain  
I2C Addr. 0x48

### 3.3V output buck–boost

