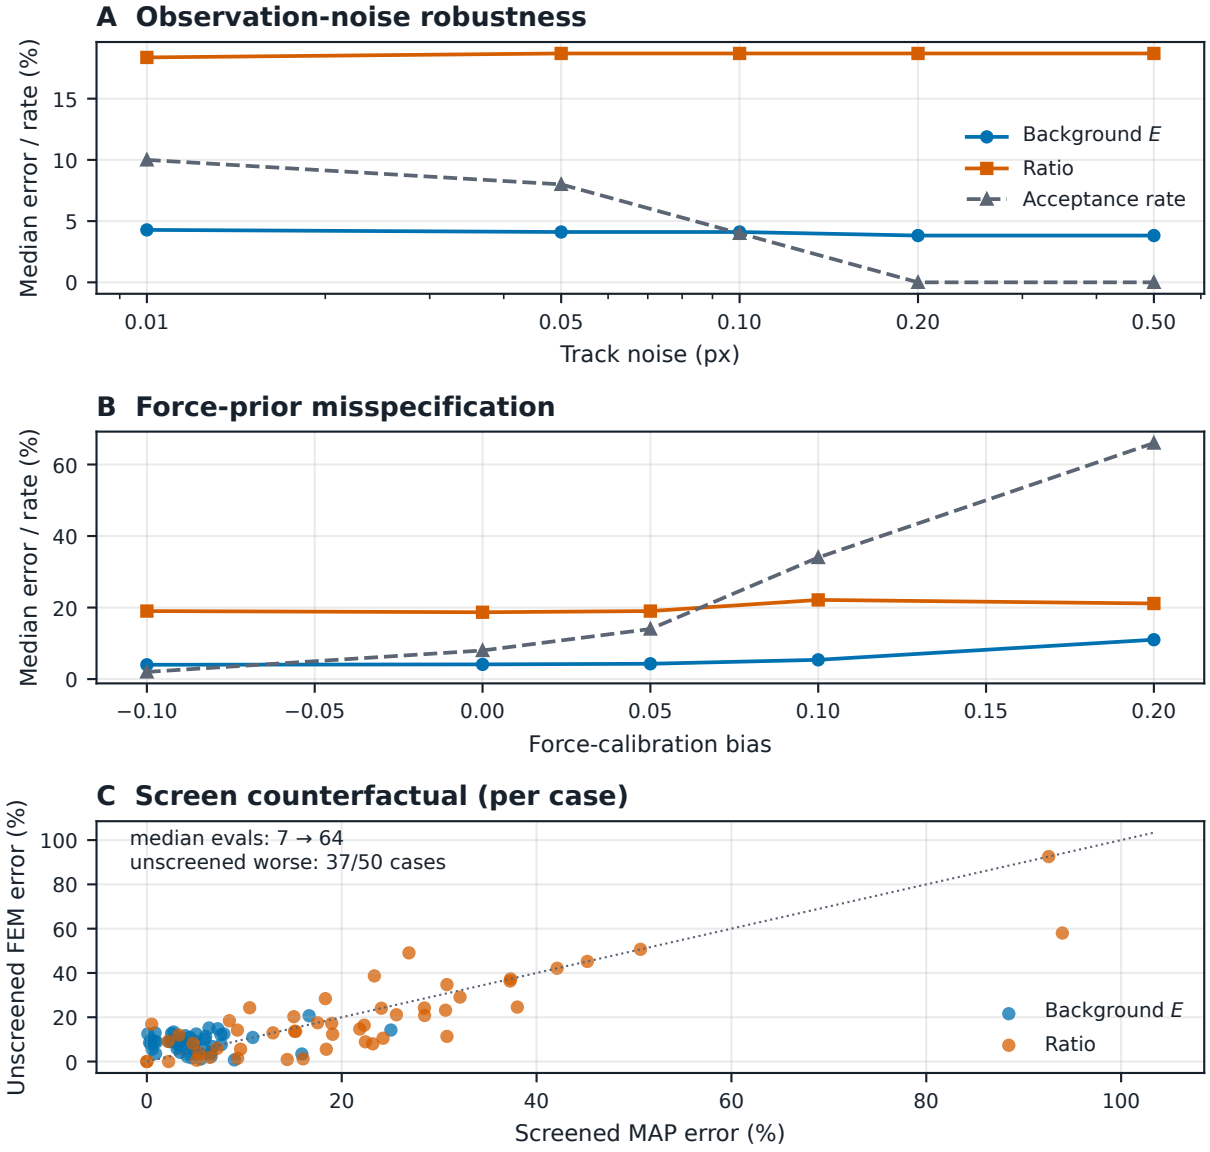
A Observation-noise robustness
Median error / rate (%)
0
5
10
15
Background E
Ratio
Acceptance rate
0.01
0.05
0.10
0.20
0.50
Track noise (px)
B Force-prior misspecification
Median error / rate (%)
0
20
40
60
−0.10
−0.05
0.00
0.05
0.10
0.15
0.20
Force-calibration bias
C Screen counterfactual (per case)
median evals: 7 → 64
unscreened worse: 37/50 cases
Unscreened FEM error (%)
0
20
40
60
80
100
Background E
Ratio
Screened MAP error (%)