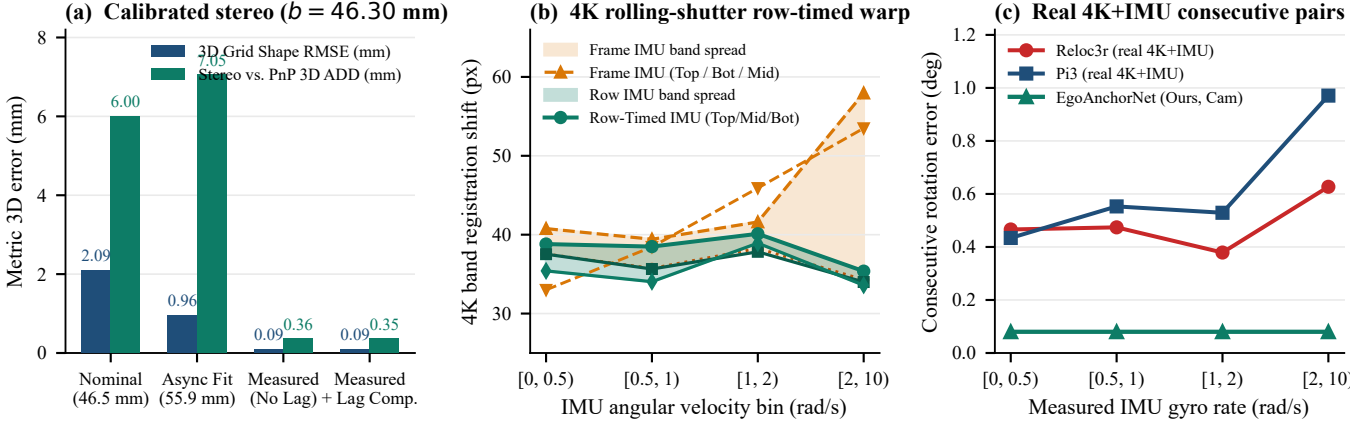

(a) Calibrated stereo (b = 46.30 mm)
3D Grid Shape RMSE (mm)
Stereo vs. PnP 3D ADD (mm)
Metric 3D error (mm)
2.09
6.00
0.96
7.05
0.09
0.36
0.09
0.35
Nominal (46.5 mm)
Async Fit (55.9 mm)
Measured (No Lag)
Measured + Lag Comp.
(b) 4K rolling-shutter row-timed warp
Frame IMU band spread
Frame IMU (Top / Bot / Mid)
Row IMU band spread
Row-Timed IMU (Top/Mid/Bot)
4K band registration shift (px)
[0, 0.5)
[0.5, 1)
[1, 2)
[2, 10)
IMU angular velocity bin (rad/s)
(c) Real 4K+IMU consecutive pairs
Reloc3r (real 4K+IMU)
Pi3 (real 4K+IMU)
EgoAnchorNet (Ours, Cam)
Consecutive rotation error (deg)
Measured IMU gyro rate (rad/s)