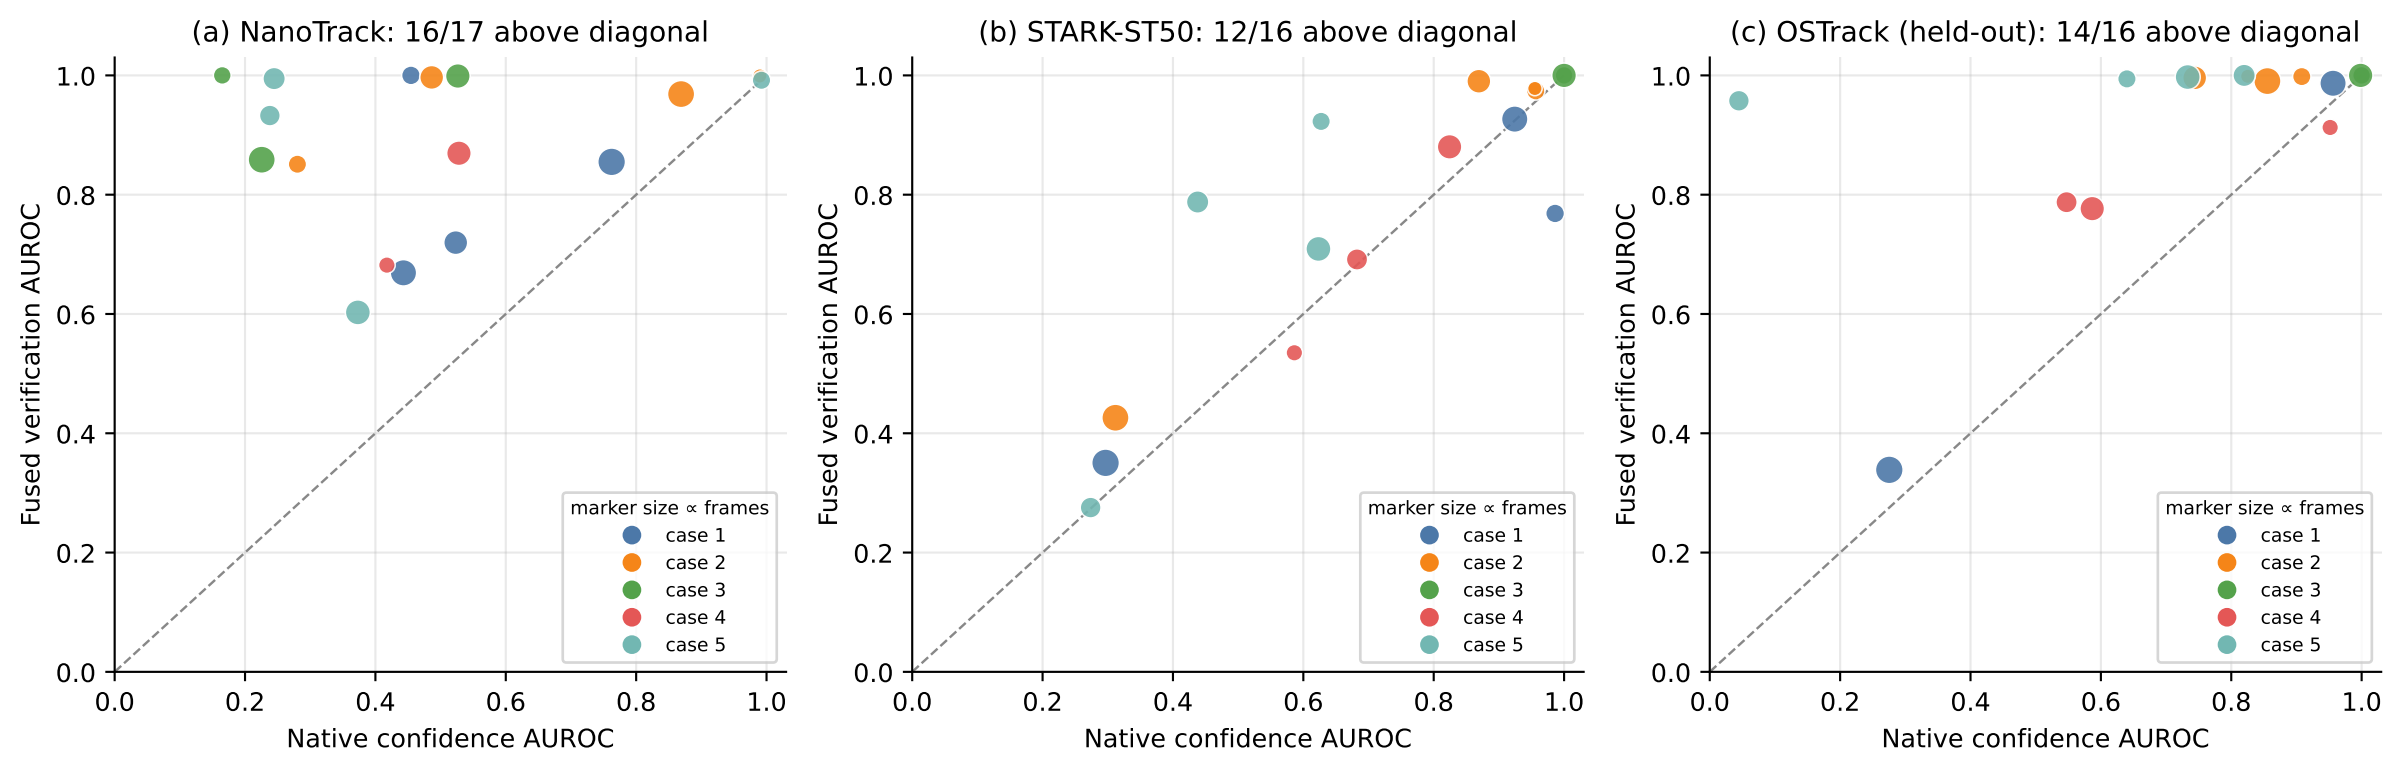
(a) NanoTrack: 16/17 above diagonal
(b) STARK-ST50: 12/16 above diagonal
(c) OSTrack (held-out): 14/16 above diagonal
Fused verification AUROC
Native confidence AUROC
0.0
0.2
0.4
0.6
0.8
1.0
marker size ∝ frames
case 1
case 2
case 3
case 4
case 5