



TOP VIEW OF EMBOSS TAPE

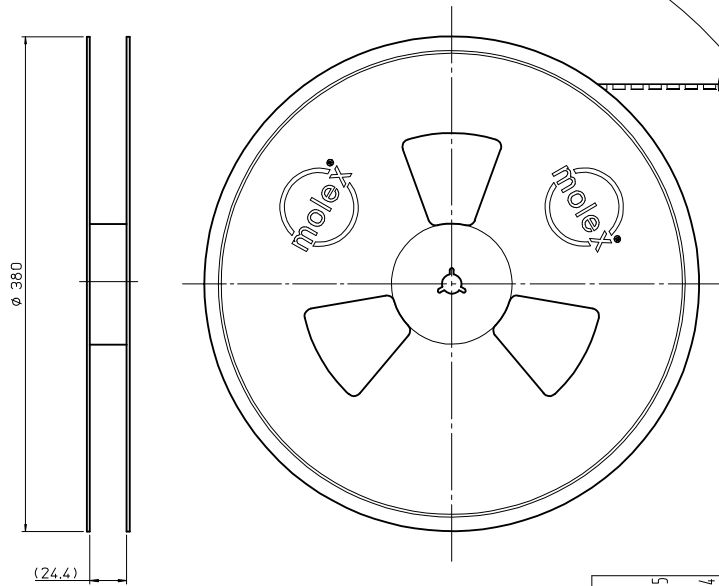


UNREELING OF PRODUCTS
DIRECTION


NOTES

1. QUANTITY OF PRODUCTS : 2,000 PCS / 1 REEL
2. LEAD LENGTH

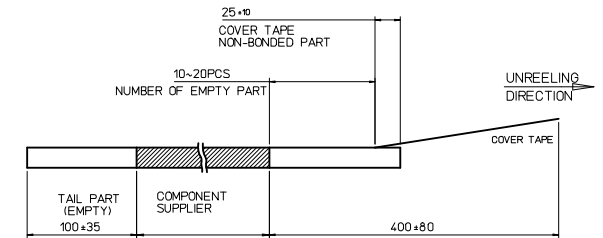

3. PEELING OFF FORCE OF COVER TAPE : 0.1N~0.59N(10.2~60gf)
(PEELING DIRECTION AS BELOW)
- PEELING OFF SPEED : 300mm/Min.(Ref.)



REVISED EC NO: KOR2013-0028 DRWN: ICYANG CHKD: APPR: YSKIM02 2012/08/25 2012/09/04	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 2/1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY IC.YANG	DATE 2008.10.01	TITLE MICROSD CARD SOCKET PUSH-PULL 1.42H NORMAL TYPE						
			4 PLACES	± ---	± ---	CHECKED BY	DATE							
			3 PLACES	± 0.1	± ---	SH. CHU	2008.10.02							
			2 PLACES	± 0.1	± ---	APPROVED BY	DATE							
			1 PLACE	± 0.2	± ---	SJ. SEH	2008.10.02							
			ANGULAR ± 1 °			MATERIAL NO.		DOCUMENT NO.			SHEET NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE SHEET1		SD-104031-001			2 OF 2			
						SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						