General Purpose Multilayer Ceramic Capacitors 4 to 100V (NP0, X5R, X7R & Y5V Dielectrics)

RoHS Compliant

Description:

MLCC consists of a conducting material and electrodes. To manufacture a chip-type SMT and achieve miniaturization, high density and high efficiency, ceramic condensers are used. The MLCC is made by NP0, X7R, X6S, X5R and Y5V dielectric material and which provides product with high electrical precision, stability and reliability.

Features:

- A wide selection of sizes is available (0201 to 1812).
- High capacitance in given case size.
- Capacitor with lead-free termination (pure Tin).

Applications:

- For general digital circuit.
- For power supply bypass capacitors.
- For consumer electronics.
- For telecommunication.

How To Order:

MC	1206	B	104	K	500	C	T
	Size	**Dielectric**	**Capacitance**	**Tolerance**	**Rated Voltage**	**Termination**	**Packaging style**
Multicomp	Inch (mm) 0201 (0603) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	N=NP0 (C0G) B=X7R F=Y5V X=X5R S=X6S	Two significant digits followed by no. of zeros. And R is in place of decimal point. Eg.: 0R5=0.5pF 1R0=1.0pF 104 = 10×10^4 = 100nF	A=±0.05pF B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20% Z=-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 4R0=4V DC 6R3=6.3V DC 100=10V DC 160=16V DC 250=25V DC 500=50V DC 101=100V DC	C=Cu/Ni/Sn	T=7" reeled R=7" reeled (2mm pitch for 0603 size; paper tape) G=13" reeled

External Dimensions:



The outline of MLCC

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		Soldering Method *	M_B (mm)
01R5 (0402)	0.4 ±0.02	0.2 ±0.02	0.2 ±0.02	V	R	0.1 ±0.03
0201 (0603)	0.6±0.03	0.3 ±0.03	0.3 ±0.03	L	R	0.15 ±0.05
	0.6±0.05#2	0.3 ±0.05#2	0.3 ±0.05#2			
	0.6±0.09#3	0.3 ±0.09#3	0.3 ±0.09#3			0.15 +0.1/-0.05
0402 (1005)	1 ±0.05	0.5 ±0.05	0.5 ±0.05	N	R	0.25 +0.05/-0.1
			0.5 +0.02/-0.05	Q		
	1 ±0.2	0.5 ±0.2	0.5 ±0.2	E		

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		Soldering Method *	M_B (mm)
0603 (1608)	1.6 ±0.1	0.8 ±0.1	0.8 ±0.07	S	R / W	0.4 ±0.15
	1.6 +0.15/-0.1	0.8 +0.15/-0.1	0.5 ±0.1	H	R / W	
			0.8 +0.15/-0.1	X	R / W	
	1.6 ±0.2*[1]	0.8 ±0.2*[1]	0.8 ±0.2*[1]			
0805 (2012)	2 ±0.15	1.25 ±0.1	0.5 ±0.1	H	R / W	0.5 ±0.2
			0.6 ±0.1	A	R / W	
			0.8 ±0.1	B	R / W	
			1.25 ±0.1	D	R	
	2 ±0.2	1.25 ±0.2	0.85 ±0.1	T	R / W	
			1.25 ±0.2	I	R	
1206 (3216)	3.2 ±0.15	1.6 ±0.15	0.8 ±0.1	B	R / W	0.6 ±0.2 (0.5±0.25)***
			0.95 ±0.1	C	R	
			1.25 ±0.1	D	R	
	3.2 ±0.2		1.15 ±0.15	J	R	
		1.6 ±0.2	1.6 ±0.2	G	R	
			0.85 ±0.1	T	R / W	
	3.2 +0.3/-0.1	1.6 +0.30/-0.1	1.6 +0.3/-0.1	P	R	
1210 (3225)	3.2 ±0.3	2.5±0.2	0.95 ±0.1	C	R	0.75 ±0.25
			0.85 ±0.1	T	R	
			1.25 ±0.1	D	R	
	3.2±0.4	2.5±0.3	1.6 ±0.2	G	R	
			2 ±0.2	K	R	
			2.5 ±0.3	M	R	
1808 (4520)	4.5 ±0.4 (4.5+0.5/-0.3)**	2.03 ±0.25	1.25 ±0.1	D	R	0.75 ±0.25 (0.5±0.25)***
			1.4 ±0.15	F	R	
			1.6 ±0.2	G	R	
			2 ±0.2	K	R	
1812 (4532)	4.5 ±0.4 4.5+0.5/-0.3)**	3.2 ±0.3	1.25 ±0.1	D	R	0.75 ±0.25 0.5±0.25)***
			1.6 ±0.2	G	R	
			2 ±0.2	K	R	
		3.2 ±0.4	2.5 ±0.3	M	R	
			2.8 ±0.3	U	R	

* R = Reflow soldering process; W = Wave soldering process.
** For 1808_200V ~3kV, 1812_200V~3kV and safety certificated products.
*** For 1206_1000V ~3kV, 1808_200V ~3kV, 1812_200V~3kV and safety certificated products.
#1: For 0603/Cap≧10μF or 0603(>10V)/Cap>1μF products.
#2: For 0201/Cap≧0.68μF products.
#3: For 0201/Cap >1μF products.

General Electrical Data:

Dielectric	NP0	X7R	Y5V	X5R	X6S
Size	0402, 0603, 0805, 1206, 1210, 1812				
Capacitance range*	0.1pF to 0.1µF	100pF to 47µF	0.01µF to 100µF	100pF to 220µF	0.1µF to 100µF
Capacitance tolerance**	Cap≤5pF#1: A (±0.05pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	J (±5%), K (±10%), M (±20%)	M (±20%), Z (-20/+80%)	K (±10%), M (±20%)	K (±10%), M (±20%)
Rated voltage (WVDC)	10V, 16V, 25V, 50V,100V	6.3V, 10V, 16V, 25V, 50V, 100V		4V, 6.3V, 10V, 16V, 25V, 50V	
DF(Tan δ)*	Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	Note 1			
Operating temperature	-55 to +125°C		-25°C to +85°C	-55°C to +85°C	-55°C to +105°C
Capacitance characteristic	±30ppm	±15%	+30/-80%	±15%	±22%
Termination	Ni/Sn (lead-free termination)				

#1: NP0, 0.1pF product only provide B tolerance

* Measured at the condition of 30~70% related humidity.
  NP0: Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap>1000pF, 25°C at ambient temperature
  X7R/X6S/X5R: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25°C ambient temperature.
  Y5V: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 20°C ambient temperature.

** Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.

Note 1:

X7R/X5R/X6S

Rated Vol.	D.F. ≦	Exception of D.F.≦	
≧100V	≦2.5%	≦3%	1206≧0.47μF
		≦5%	0805＞0.1μF, 0603≧0.068μF, 1206>1μF; TT series
50V	≦2.5%	≦3%	0201(50V); 0603≧0.047μF; 0805≧0.18μF;1206≧0.47μF
		≦5%	1210≧4.7μF
		≦10%	0402≧0.1μF ;0603≧1μF;0805≧1μF;1206≧2.2μF; 1210≧10μF;TT series
35V	≦3.5%	≦10%	0603≧1μF;0805≥2.2μF; 1210≧10μF
25V	≦3.5%	≦5%	0201≧0.01μF;0805≧1μF; 1210≧10μF
		≦7%	0603≧0.33μF; 1206≧4.7μF
		≦10%	0402≧0.10μF;0603≧0.47μF; 0805≧2.2μF; 1206≧6.8μF ; 1210≧22μF ; TT series
		≦12.5%	0402≧1μF
16V	≦3.5%	≦5%	0201≧0.01μF;0402≧0.033μF; 0603≧0.15μF; 0805≧0.68μ 1206≧2.2μF;1210≧4.7μF
		≦10%	0201≧0.1μF;0402≧ 0.22uF; 0603≧0.68μF;0805≧2.2μF; 1206≧4.7μF; 1210≧22μF; TT series
10V	≦5%	≦10%	0201≧0.012μF;0402≧0.33μF(0402/X7R≧0.22μF); TT series 0603≧0.33μF; 0805≧2.2μF;1206≧2.2μF;1210≧22μF
		≦15%	0201≧0.1μF; 0402≧1μF
6.3V	≦10%	≦15%	0201≧0.1μF;0402≧1μF;0603≧10μF; 0805≧4.7μF; 1206≧47μF :1210≧100μF; TT series
		≦20%	0402≧2.2μF
4V	≦15%	---	---

Y5V

Rated vol.	D.F.≦	Exception of D.F.≦	
≧50V	5%	7%	0603≧0.1μF; 0805≧0.47μF; 1206≧4.7μF
35V	7%	---	---
25V	5%	7%	0402≧0.047μF;0603≧0.1μF; 0805≧0.33μF;1206≧1μF; 1210≧4.7μF
		9%	0402≧0.068μF;0603≧0.47μF; 1206≧4.7μF; 1210≧22μF
16V (C<1.0μF)	7%	9%	0402≧0.068μF; 0603≧0.68μF
		12.5%	0402≧0.22μF
16V (C≧1.0μF)	9%	12.5%	0603≧2.2μF; 0805≧3.3μF; 1206≧10μF; 1210≧22μF; 1812≧47μF
10V	12.5%	20%	0402≧0.47μF
6.3V	20%	---	---

Capacitance Range

NP0 Dielectric 0201, 0402, 0603, 0805 Sizes

Dielectric		NP0																	
Size		0201			0402					0603					0805				
Rated Voltage (V DC)		16	25	50	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100
Capacitance	0.1pF (0R1)	L	L	L	N	N	N	N											
	0.2pF (0R2)	L	L	L	N	N	N	N											
	0.3pF (0R3)	L	L	L	N	N	N	N											
	0.4pF (0R4)	L	L	L	N	N	N	N											
	0.5pF (0R5)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	0.6pF (0R6)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	0.7pF (0R7)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	0.8pF (0R8)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	0.9pF (0R9)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.0pF (1R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.2pF (1R2)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.5pF (1R5)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.8pF (1R8)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	2.0pF (2R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	2.2pF (2R2)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	2.7pF (2R7)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	3.0pF (3R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	3.3pF (3R3)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	3.9pF (3R9)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	4.0pF (4R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	4.7pF (4R7)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	5.0pF (5R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	5.6pF (5R6)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	6.0pF (6R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	6.8pF (6R8)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	7.0pF (7R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	8.0pF (8R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	8.2pF (8R2)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	9.0pF (9R0)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	10pF (100)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	12pF (120)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	15pF (150)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	18pF (180)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	22pF (220)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	27pF (270)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	33pF (330)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	39pF (390)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	47pF (470)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	56pF (560)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A

Dielectric		NP0																	
Size		0201			0402					0603					0805				
Rated Voltage (V DC)		16	25	50	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100
Capacitance	68pF (680)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	82pF (820)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	100pF (101)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	120pF (121)	L	L	L	N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	150pF (151)				N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	180pF (181)				N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	220pF (221)				N	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	270pF (271)				N	N	N	N		S	S	S	S	S	A	A	A	A	A
	330pF (331)				N	N	N	N		S	S	S	S	S	A	A	A	A	A
	390pF (391)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	470pF (471)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	560pF (561)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	680pF (681)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	820pF (821)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	1,000pF (102)				N	N	N	N		S	S	S	S	S	B	B	B	B	B
	1,200pF (122)									X	X	X	X	X	B	B	B	B	B
	1,500pF (152)									X	X	X	X	X	B	B	B	B	B
	1,800pF (182)									X	X	X	X		B	B	B	B	B
	2,200pF (222)									X	X	X	X		B	B	B	B	B
	2,700pF (272)									X	X	X	X		D	D	D	D	D
	3,300pF (332)									X	X	X	X		D	D	D	D	D
	3,900pF (392)									X	X	X	X		D	D	D	D	D
	4,700pF (472)									X	X	X	X		D	D	D	D	D
	5,600pF (562)									X	X	X	X		D	D	D	D	D
	6,800pF (682)									X	X	X	X		D	D	D	D	D
	8,200pF (822)									X	X	X	X		D	D	D	D	
	0.010uF (103)									X	X	X	X		D	D	D	D	
	0.012uF (123)														T	T	T	T	
	0.018uF (183)														D	D	D	D	
	0.022uF (223)														D	D	D	D	

1. The letter in cell is expressed the symbol of product thickness.

NP0 Dielectric 1206, 1210, 1812 Sizes

Dielectric		NP0												
Size		1206					1210					1812		
Rated Voltage (V DC)		10	16	25	50	100	10	16	25	50	100	16	50	100
Capacitance	1.0pF (1R0)													
	1.2pF (1R2)	B	B	B	B	B								
	1.5pF (1R5)	B	B	B	B	B								
	1.8pF (1R8)	B	B	B	B	B								
	2.2pF (2R2)	B	B	B	B	B								

Dielectric		NP0												
Size		1206					1210					1812		
Rated Voltage (V DC)		10	16	25	50	100	10	16	25	50	100	16	50	100
Capacitance	2.7pF (2R7)	B	B	B	B	B								
	3.3pF (3R3)	B	B	B	B	B								
	3.9pF (3R9)	B	B	B	B	B								
	4.7pF (4R7)	B	B	B	B	B								
	5.6pF (5R6)	B	B	B	B	B								
	6.8pF (6R8)	B	B	B	B	B								
	8.2pF (8R2)	B	B	B	B	B								
	10pF (100)	B	B	B	B	B	C	C	C	C	C	D	D	D
	12pF (120)	B	B	B	B	B	C	C	C	C	C	D	D	D
	15pF (150)	B	B	B	B	B	C	C	C	C	C	D	D	D
	18pF (180)	B	B	B	B	B	C	C	C	C	C	D	D	D
	22pF (220)	B	B	B	B	B	C	C	C	C	C	D	D	D
	27pF (270)	B	B	B	B	B	C	C	C	C	C	D	D	D
	33pF (330)	B	B	B	B	B	C	C	C	C	C	D	D	D
	39pF (390)	B	B	B	B	B	C	C	C	C	C	D	D	D
	47pF (470)	B	B	B	B	B	C	C	C	C	C	D	D	D
	56pF (560)	B	B	B	B	B	C	C	C	C	C	D	D	D
	68pF (680)	B	B	B	B	B	C	C	C	C	C	D	D	D
	82pF (820)	B	B	B	B	B	C	C	C	C	C	D	D	D
	100pF (101)	B	B	B	B	B	C	C	C	C	C	D	D	D
	120pF (121)	B	B	B	B	B	C	C	C	C	C	D	D	D
	150pF (151)	B	B	B	B	B	C	C	C	C	C	D	D	D
	180pF (181)	B	B	B	B	B	C	C	C	C	C	D	D	D
	220pF (221)	B	B	B	B	B	C	C	C	C	C	D	D	D
	270pF (271)	B	B	B	B	B	C	C	C	C	C	D	D	D
	330pF (331)	B	B	B	B	B	C	C	C	C	C	D	D	D
	390pF (391)	B	B	B	B	B	C	C	C	C	C	D	D	D
	470pF (471)	B	B	B	B	B	C	C	C	C	C	D	D	D
	560pF (561)	B	B	B	B	B	C	C	C	C	C	D	D	D
	680pF (681)	B	B	B	B	B	C	C	C	C	C	D	D	D
	820pF (821)	B	B	B	B	B	C	C	C	C	C	D	D	D
	1,000pF (102)	B	B	B	B	B	C	C	C	C	C	D	D	D
	1,200pF (122)	B	B	B	B	B	C	C	C	C	C	D	D	D
	1,500pF (152)	B	B	B	B	B	C	C	C	C	C	D	D	D
	1,800pF (182)	B	B	B	B	B	C	C	C	C	C	D	D	D
	2,200pF (222)	B	B	B	B	B	C	C	C	C	C	D	D	D
	2,700pF (272)	B	B	B	B	B	C	C	C	C	C	D	D	D
	3,300pF (332)	B	B	B	B	B	C	C	C	C	C	D	D	D
	3,900pF (392)	B	B	B	B	B	C	C	C	C	C	D	D	D
	4,700pF (472)	B	B	B	B	B	C	C	C	C	C	D	D	D
	5,600pF (562)	B	B	B	B	B	C	C	C	C	C	D	D	D
	6,800pF (682)	C	C	C	C	C	C	C	C	C	C	D	D	D

Dielectric		NP0												
Size		1206					1210					1812		
Rated Voltage (V DC)		10	16	25	50	100	10	16	25	50	100	16	50	100
Capacitance	8,200pF (822)	D	D	D	D	D	C	C	C	C	C	D	D	D
	0.010µF (103)	D	D	D	D	D	C	C	C	C	C	D	D	D
	0.012µF (123)	T	T	T	T	T	D	D	D	D	D	D	D	D
	0.015µF (153)	T	T	T	T	T	D	D	D	D	D	D	D	D
	0.018µF (183)	T	T	T	T	T						D	D	D
	0.022µF (223)	T	T	T	T	T						D	D	D
	0.027µF (273)	T	T	T	T							D	D	D
	0.033µF (333)	T	T	T	T							D	D	D
	0.039µF (393)	J	J	J	J									
	0.047µF (473)	J	J	J	J									
	0.056µF (563)	J	J	J	J									
	0.068µF (683)	G	G	G	G									
	0.082µF (823)	G	G	G	G									
	0.1µF (104)	G	G	G	G									

1. The letter in cell is expressed the symbol of product thickness.

X7R Dielectric 0201, 0402, 0603, 0805 Sizes

Dielectric		X7R																					
Size		0201					0402						0603						0805				
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	6.3	10	16	25	50	100
Capacitance	100pF (101)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	120pF (121)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	150pF (151)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	180pF (181)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	220pF (221)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	270pF (271)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	330pF (331)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	390pF (391)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	470pF (471)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	560pF (561)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	680pF (681)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	820pF (821)			L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	1,000pF (102)	L	L	L	L	L		N	N	N	N	N		S	S	S	S	S		B	B	B	B	B
	1,200pF (122)	L	L	L	L			N	N	N	N			S	S	S	S	S		B	B	B	B	B
	1,500pF (152)	L	L	L	L			N	N	N	N			S	S	S	S	S		B	B	B	B	B
	1,800pF (182)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B
	2,200pF (222)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B
	2,700pF (272)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B
	3,300pF (332)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B
	3,900pF (392)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B

Dielectric		X7R																					
Size		0201					0402						0603						0805				
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100	6.3	10	16	25	50	100
Capacitance	4,700pF (472)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B
	5,600pF (562)	L	L					N	N	N	N			S	S	S	S	S		B	B	B	B	B
	6,800pF (682)	L	L					N	N	N	N			S	S	S	S	S		B	B	B	B	B
	8,200pF (822)	L	L					N	N	N	N			S	S	S	S	S		B	B	B	B	B
	0.010µF (103)	L	L	L				N	N	N	N			S	S	S	S	S		B	B	B	B	B
	0.012µF (123)							N	N	N				S	S	S	S	X		B	B	B	B	B
	0.015µF (153)							N	N	N				S	S	S	S	X		B	B	B	B	B
	0.018µF (183)							N	N	N				S	S	S	S	X		B	B	B	B	B
	0.022µF (223)							N	N	N	N			S	S	S	S	X		B	B	B	B	B
	0.027µF (273)							N	N	N				S	S	S	S	X		B	B	B	B	D
	0.033µF (333)							N	N	N	N			S	S	S	X	X		B	B	B	B	D
	0.039µF (393)							N	N	N				S	S	S	X	X		B	B	B	B	D
	0.047µF (473)							N	N	N	N			S	S	S	X	X		B	B	B	B	D
	0.056µF (563)							N	N					S	S	S	X	X		B	B	B	B	D
	0.068µF (683)							N	N		N			S	S	S	X	X		B	B	B	B	D
	0.082µF (823)							N	N					S	S	S	X	X		B	B	B	B	D
	0.10µF (104)						N	N	N	N	N			S	S	S	X	X		B	B	B	B	D
	0.12µF (124)													S	S	X				B	B	B	D	
	0.15µF (154)													S	S	X				D	D	D	D	
	0.18µF (184)													S	S	X				D	D	D	D	
	0.22µF (224)						N	N	N	N				S	S	X	X			D	D	D	D	T
	0.27µF (274)												X	X	X	X				D	D	D	I	
	0.33µF (334)												X	X	X	X				D	D	D	I	
	0.39µF (394)												X	X	X	X				D	D	D	I	
	0.47µF (474)						N	N					X	X	X	X	X			D	D	D	I	I
	0.56µF (564)												X	X	X					D	D	D		
	0.68µF (684)												X	X	X					D	D	D		
	0.82µF (824)												X	X	X					D	D	D		
	1.0µF (105)						N						X	X	X	X	X			D	D	D	I	
	1.5µF (155)																			I	I	I		
	2.2µF (225)												X	X					I	I	I	I	I	
	3.3µF (335)																							
	4.7µF (475)																		I	I	I	I		
	6.8µF (685)																							
	10µF (106)																		I	I	I*			
	22µF (226)																							

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with " * " mark is expressed product not in 10% (code "K") tolerance.

X7R Dielectric 1206, 1210, 1812 Sizes

Dielectric		X7R																
Size		1206						1210						1812				
Rated Voltage (V DC)		6.3	10	16	25	50	100	6.3	10	16	25	50	100	10	16	25	50	100
Capacitance	100pF (101)																	
	120pF (121)																	
	150pF (151)		B	B	B	B	B											
	180pF (181)		B	B	B	B	B											
	220pF (221)		B	B	B	B	B											
	270pF (271)		B	B	B	B	B											
	330pF (331)		B	B	B	B	B											
	390pF (391)		B	B	B	B	B											
	470pF (471)		B	B	B	B	B											
	560pF (561)		B	B	B	B	B											
	680pF (681)		B	B	B	B	B											
	820pF (821)		B	B	B	B	B											
	1,000pF (102)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	1,200pF (122)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	1,500pF (152)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	1,800pF (182)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	2,200pF (222)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	2,700pF (272)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	3,300pF (332)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	3,900pF (392)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	4,700pF (472)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	5,600pF (562)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	6,800pF (682)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	8,200pF (822)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.010µF (103)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.012µF (123)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.015µF (153)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.018µF (183)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.022µF (223)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.027µF (273)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.033µF (333)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.039µF (393)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.047µF (473)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.056µF (563)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.068µF (683)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.082µF (823)		B	B	B	B	D		C	C	C	C	C	D	D	D	D	D
	0.10µF (104)		B	B	B	B	D		C	C	C	C	C	D	D	D	D	D
	0.12µF (124)		B	B	B	B	D		C	C	C	C	C	D	D	D	D	D
	0.15µF (154)		C	C	C	C	G		C	C	C	C	D	D	D	D	D	D

Dielectric		X7R																
Size		1206						1210						1812				
Rated Voltage (V DC)		6.3	10	16	25	50	100	6.3	10	16	25	50	100	10	16	25	50	100
Capacitance	0.18µF (184)		C	C	C	C	G		C	C	C	C	D	D	D	D	D	D
	0.22µF (224)		C	C	C	C	G		C	C	C	C	D	D	D	D	D	D
	0.27µF (274)		C	C	C	D	G		C	C	C	C	G	D	D	D	D	D
	0.33µF (334)		C	C	C	D	G		C	C	C	D	G	D	D	D	D	D
	0.39µF (394)		C	C	J	P	G		C	C	C	D	M	D	D	D	D	D
	0.47µF (474)		J	J	J	P	G		C	C	C	D	M	D	D	D	D	K
	0.56µF (564)		J	J	J	P	P		D	D	D	D	M	D	D	D	D	K
	0.68µF (684)		J	J	J	P	P		D	D	D	D	K	D	D	D	K	K
	0.82µF (824)		J	J	J	P	P		D	D	D	D	K	D	D	D	K	K
	1.0µF (105)		J	J	J	P	P		D	D	D	D	K	D	D	D	K	K
	1.5µF (155)	J	J	J	P					K	G	M	M					K
	2.2µF (225)	J	J	J	P	P	P			K	G	M	M				M	M
	3.3µF (335)		P	P	P					K	G							
	4.7µF (475)	P	P	P	P	P			K	K	K	M						
	6.8µF (685)																	
	10µF (106)	P	P	P	P				K	K	K	M						
	22µF (226)	P	P	P*					M	M	M							
	47µF (476)							M	M									
	100µF (107)																	

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with " * " mark is expressed product not in 10% (code "K") tolerance.

Y5V Dielectric 0402, 0603, 0805 Sizes

Dielectric		Y5V															
Size		0402					0603					0805					
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	100
Capacitance	0.010µF (103)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.015µF (153)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.022µF (223)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.033µF (333)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.047µF (473)		N	N	N			S	S	S	S		A	A	A	A	B
	0.068µF (683)		N	N	N			S	S	S	S		A	A	A	A	B
	0.10µF (104)		N	N	N			S	S	S	S		A	A	A	A	B
	0.15µF (154)		N	N				S	S	S	S		A	A	A	A	
	0.22µF (224)	N	N	N				S	S	S	S		A	A	A	A	
	0.33µF (334)	N	N	N				S	S	S	X		B	B	B	B	
	0.47µF (474)	N	N	N				S	S	X	X		B	B	B	B	
	0.68µF (684)	N						S	X	X			B	B	D	D	
	1.0µF (105)	N	N					S	X	X			B	B	D	D	
	1.5µF (155)							S					D	D			

Dielectric		Y5V															
Size		0402					0603					0805					
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	100
Capacitance	2.2µF (225)						S	S	X				D	D	I		
	3.3µF (335)												D	D			
	4.7µF (475)						X	X					D	D	I		
	6.8µF (685)												I				
	10µF (106)											I	I	I			
	22µF (226)											I	I				

1. The letter in cell is expressed the symbol of product thickness.

Y5V Dielectric 1206, 1210, 1812 Sizes

Dielectric		Y5V																
Size		1206						1210						1812				
Rated Voltage (V DC)		6.3	10	16	25	50	100	6.3	10	16	25	50	100	10	16	25	50	100
Capacitance	0.010µF (103)		B	B	B	B	B						C					D
	0.015µF (153)		B	B	B	B	B						C					D
	0.022µF (223)		B	B	B	B	B						C					D
	0.033µF (333)		B	B	B	B	B						C					D
	0.047µF (473)		B	B	B	B	B						C					D
	0.068µF (683)		B	B	B	B	B						C					D
	0.10µF (104)		B	B	B	B	B		C	C	C	C	C	D	D	D	D	D
	0.15µF (154)		B	B	B	B	C		C	C	C	C	C	D	D	D	D	D
	0.22µF (224)		B	B	B	B	C		C	C	C	C	C	D	D	D	D	D
	0.33µF (334)		B	B	B	B			C	C	C	C	C	D	D	D	D	D
	0.47µF (474)		B	B	B	B			C	C	C	C		D	D	D	D	D
	0.68µF (684)		B	B	B	B			C	C	C	C		D	D	D	D	D
	1.0µF (105)		C	C	C	C			C	C	C	C		D	D	D	D	D
	1.5µF (155)		C	C	C				C	C	C			D	D	D	D	
	2.2µF (225)		C	C	C	J			C	C	C	G		D	D	D	D	
	3.3µF (335)		J	J	J				C	C	C			D	D	D	D	
	4.7µF (475)		J	J	J	P			C	C	D	G		D	D	D	D	
	6.8µF (685)		J	J					C	C	D			D	D	D	D	
	10µF (106)		J	J	P				D	D	G			D	D	D	K	
	22µF (226)		P	P					K	K								
	47µF (476)	P						K	K						M			
	100µF (107)							M										

1. The letter in cell is expressed the symbol of product thickness.

X5R Dielectric 0201, 0402, 0603, 0805, 1206, 1210 Sizes

Dielectric		X5R														
Size		0201					0402					0603				
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	100pF (101)			L	L	L										
	120pF (121)			L	L	L										
	150pF (151)			L	L	L										
	180pF (181)			L	L	L										
	220pF (221)			L	L	L										
	270pF (271)			L	L	L										
	330pF (331)			L	L	L										
	390pF (391)			L	L	L										
	470pF (471)			L	L	L										
	560pF (561)			L	L	L										
	680pF (681)			L	L	L										
	820pF (821)			L	L	L										
	1,000pF (102)		L	L	L	L										
	1,500pF (152)		L	L												
	2,200pF (222)		L	L												
	2,700pF (272)		L	L												
	3,300pF (332)		L	L												
	4,700pF (472)		L	L												
	6,800pF (682)		L													
	0.010µF (103)	L	L	L	L											
	0.015µF (153)	L	L													
	0.022µF (223)	L	L													
	0.027µF (273)	L	L						N							
	0.033µF (333)	L	L						N							
	0.039µF (393)	L	L						N							
	0.047µF (473)	L	L						N							
	0.056µF (563)	L	L					N	N							
	0.068µF (683)	L	L					N	N							
	0.082µF (823)	L	L				N	N	N							
	0.10µF (104)	L	L	L	L		N	N	N	N	N					
	0.15µF (154)						N	N	N	N						
	0.22µF (224)	L	L				N	N	N	N	N			X	X	
	0.27uF (274)												X	X	X	
	0.33µF (334)						N	N				X	X	X	X	
	0.39µF (394)												X	X	X	
	0.47µF (474)	L					N	N	E	E	E	X	X	X	X	X
	0.68µF (684)						N	N				X	X	X	X	
	0.82uF (824)											X	X	X		
	1.0µF (105)	L	L*				N	N	N	N		X	X	X		X
	1.5µF (155)											X				
	2.2µF (225)	L*					N	N	E*	E		X	X	X	X	X
	3.3µF (335)											X	X			

Dielectric		X5R														
Size		0201					0402					0603				
Rated Voltage (V DC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	4.7µF (475)						E*	E*				X	X	X	X	
	6.8uF (685)															
	10µF (106)						E*	E*				X	X	X	X*	
	22µF (226)											X*	X*			

Dielectric		X5R																
Size		1206						1210					1812					
Rated Voltage (V DC)		4	6.3	10	16	25	50	6.3	10	16	25	50	4	6.3	10	16	25	50
Capacitance	1.0µF (105)			D	D	D	I											
	1.5µF (155)		I	I	I	I			J	J					K	K		
	2.2µF (225)		I	I	I	I	I		J	J	P	P			K	K		
	3.3µF (335)		I	I	I	I			P	P	P							
	4.7µF (475)		I	I	I	I	I	P	P	P	P	P			K	K	K	
	6.8uF (685)							P	P									
	10µF (106)		I	I	I	I	I	P	P	P	P	P		K	K	K	K	M
	22µF (226)		I*	I*	I*			P	P	P	P			M	M	M	M	
	47µF (476)		I*	I*				P	P					M	M	M		
	100µF (107)	I*						P*						M*	M*			
	220µF (227)												M*					

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with " * " mark is expressed product not in 10% (code "K") tolerance.

X6S Dielectric 0201, 0402, 0603, 0805, 1206, 1210 Sizes

Dielectric		X6S																										
Size		0201		0402				0603					0805						1206					1210				
Rated Voltage (V DC)		4	6.3	6.3	10	16	25	4	6.3	10	16	25	4	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	0.10µF (104)	L	L																									
	0.15µF (154)																											
	0.22µF (224)		L																									
	0.33µF (334)																											
	0.47µF (474)			N																								
	0.68µF (684)																											
	1.0µF (105)	L*		N	E	E	E																					
	1.5µF (155)																											
	2.2µF (225)			N	E	E						X																
	3.3µF (335)																											
	4.7µF (475)								X		X	X					I	I										
	6.8uF (685)																											
	10µF (106)								X*	X*	X*		I	I	I	I	I					G						
	22µF (226)							X*	X*					I*	I*	I*				P	P*						M	
	47µF (476)												I*						P					M	M	M		
	100µF (107)																							M*				

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with " * " mark is expressed product not in 10% (code "K") tolerance.

Packaging Dimension And Quantity:

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0201 (0603)	0.3 ±0.03	L	15,000	70,000	-	-
	0.3 ± 0.05	L	15,000	-	-	-
	0.3 ±0.09	L	15,000	-	-	-
0402 (1005)	0.5 ±0.05	N	10,000	50,000	-	-
	0.5 +0.02/-0.05	Q	10,000	50,000	-	-
	0.5 ±0.2	E	10,000	-	-	-
0603 (1608)	0.5 ±0.1	H	4,000	-	-	-
	0.8 ±0.07	S	4,000	15,000	-	-
	0.8 +0.15/-0.1	X	4,000	15,000	-	-
0805 (2012)	0.5 ±0.1	H	4,000	15,000	-	-
	0.6 ±0.1	A	4,000	15,000	-	-
	0.8 ±0.1	B	4,000	15,000	-	-
	0.85 ±0.1	T	4,000	15,000	-	-
	1.25 ±0.1	D	-	-	3,000	10,000
	1.25 ±0.2	I	-	-	3,000	10,000
1206 (3216)	0.8 ±0.1	B	4,000	15,000	-	-
	0.85 ±0.1	T	4,000	15,000	-	-
	0.95 ±0.1	C	-	-	3,000	10,000
	1.15 ±0.15	J	-	-	3,000	10,000
	1.25 ±0.1	D	-	-	3,000	10,000
	1.6 ±0.2	G	-	-	2,000	10,000
	1.6 +0.30/-0.10	P	-	-	2,000	9,000
1210 (3225)	0.85 ±0.1	T	-	-	3,000	10,000
	0.95 ±0.1	C	-	-	3,000	10,000
	1.25 ±0.1	D	-	-	3,000	10,000
	1.6 ±0.2	G	-	-	2,000	-
	2 ±0.2	K	-	-	1,000	6,000
	2.5 ±0.3	M	-	-	1,000	6,000
1808 (4520)	1.25 ±0.1	D	-	-	2,000	10,000
	1.1 ±0.15	F	-	-	2,000	10,000
	1.6 ±0.2	G	-	-	2,000	8,000
	2 ±0.2	K	-	-	1,000	6,000
1812 (4532)	1.25 ±0.1	D	-	-	1,000	5,000
	1.6 ±0.2	G	-	-	1,000	-
	2 ±0.2	K	-	-	1,000	-
	2.5 ±0.3	M	-	-	500	3,000
	2.8 ±0.3	U	-	-	500	-

Unit : pieces

Reliability Test Conditions And Requirements:

No	Item	Test Condition	Requirements
1	Visual and Mechanical	-	No remarkable defect. Dimensions to conForm to individual specification sheet.

<table>
<tr><th>No</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>2</td><td>Capacitance</td><td rowspan="2">Class I: NP0
Cap≤1000pF 1.0±0.2Vrms, 1MHz±10%
Cap>1000pF 1.0±0.2Vrms, 1KHz±10%
Class II: X7R, X5R, X6S,Y5V
Cap≤10μF, 1.0±0.2Vrms, 1kHz±10% **
Cap>10μF, 0.5±0.2Vrms, 120Hz±20%

** Test condition: 0.5±0.2Vrms, 1KHz±10%
X7R: 0603≧225(10V), 0805=106(6.3V&10V)
X5R: 01R5≧103, 0201≧224 (6.3V,10V),
0402≧475 (6.3V), 0402≧225(10V), 0603=106 (6.3V,10V),
TT18X ≧475(10V) , TT15X series
X6S:0201≧224 (6.3V),0402≧225 (6.3V),</td><td>*Shall not exceed the limits given in the detailed spec.</td></tr>
<tr><td></td><td>Q/ D.F. (Dissipation Factor)</td><td>NP0: Cap≥30pF, Q≥1000; Cap<30pF,Q≥400+20C
X7R,X5R,X6S:
<table><tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr><tr><td rowspan="2">≧100V</td><td rowspan="2">≦2.5%</td><td>≦3%</td><td>1206≧0.47μF</td></tr><tr><td>≦5%</td><td>0805>0.1μF, 0603≧0.068μF, 1206>1μF; TT series</td></tr><tr><td rowspan="3">≧50V</td><td rowspan="3">≦2.5%</td><td>≦3%</td><td>0201(50V); 0603≧0.047μF; 0805≧0.18μF;1206≧0.47μF</td></tr><tr><td>≦5%</td><td>1210≧4.7μF</td></tr><tr><td>≦10%</td><td>0402≧0.1μF; 0603≧1μF; 0805≧1μF; 1206≧4.7μF; 1210≧10μF TT series</td></tr><tr><td>35V</td><td>≦3.5%</td><td>≦10%</td><td>0603≧1μF; 0805≥2.2μF; 1210≧10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF;0805≧1μF; 1210≧10μF</td></tr><tr><td>≦7%</td><td>0603≧0.33μF; 1206≧4.7μF</td></tr><tr><td>≦10%</td><td>0402≧0.10μF;0603≧0.47μF;0805≧2.2 μF; 1206≧6.8μF ; 1210≧22μF; TT series</td></tr><tr><td>≦12.5%</td><td>0402≧1μF</td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0402≧0.033μF; 0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr><tr><td>≦10%</td><td>0201≧0.1μF; 0402≧0.47μF; 0603≧0.68μF;0805≧2.2μF; 1206≧4.7μF; 1210≧22μF; TT series</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.012μF;0402≧0.33μF(0402/X7R≧0.22μF); TT series 0603≧0.33μF; 0805≧2.2μF;1206≧2.2μF;1210≧22μF</td></tr><tr><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF</td></tr><tr><td rowspan="2">6.3V</td><td rowspan="2">≦10%</td><td>≦15%</td><td>0201≧0.1μF;0402≧1μF;0603≧10μF; 0805≧4.7μF; 1206≧47μF :1210≧100μF; TT series</td></tr><tr><td>≦20%</td><td>0402≧2.2μF</td></tr><tr><td>4V</td><td>≦15%</td><td>-</td><td>-</td></tr></table>
Y5V:
<table><tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr><tr><td>≧50V</td><td>5%</td><td>7%</td><td>0603≧0.1μF; 0805≧0.47μF; 1206≧4.7μF</td></tr><tr><td>35V</td><td>7%</td><td>-</td><td>-</td></tr><tr><td rowspan="2">25V</td><td rowspan="2">5%</td><td>7%</td><td>0402≧0.047μF;0603≧0.1μF; 0805≧0.33μF;1206≧1μF; 1210≧4.7μF</td></tr><tr><td>9%</td><td>0402≧0.068μF; 0603≧0.47μF; 1206≧4.7μF; 1210≧22μF</td></tr><tr><td rowspan="2">16V (C<1μF)</td><td rowspan="2">7%</td><td>9%</td><td>0402≧0.068μF; 0603≧0.68μF</td></tr><tr><td>12.5%</td><td>0402≧0.22μF</td></tr><tr><td>16V (C≧1.0μF)</td><td>9%</td><td>12.5%</td><td>0603≧2.2μF; 0805≧3.3μF; 1206≧10μF; 1210≧22μF; 1812≧47μF</td></tr><tr><td>10V</td><td>12.5%</td><td>20%</td><td>0402≧0.47μF</td></tr><tr><td>6.3V</td><td>20%</td><td>-</td><td>-</td></tr></table></td></tr>
</table>

<table>
<tr><th>No</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>4</td><td>Dielectric Strength</td><td>To apply voltage (≤100V) 250%.
Duration: 1 to 5 sec.
Charge and discharge current less than 50mA.</td><td>No evidence of damage or flash over during test.</td></tr>
<tr><td>5</td><td>Insulation Resistance</td><td>To apply rated voltage for max. 120 sec.</td><td>10GΩ or RxC≧500Ω-F whichever is smaller.
Class II (X7R, X5R, X6S, Y5V)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: X7R</td><td rowspan="7">10G or RxC≧100ΩF whichever is smaller.</td></tr>
<tr><td>50V:0603≥1μF;0805≥1μF;1206≥4.7μF;
1210≥4.7μF</td></tr>
<tr><td>35V:0805≥2.2μF;1210≧10μF</td></tr>
<tr><td>25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;
1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;
1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;
0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V ; 4V</td></tr>
<tr><td>All X6S items</td><td rowspan="8">RxC≧50 Ω-F.</td></tr>
<tr><td>50V: 0402≥0.1μF; 0603≥2.2μF;
0805≥10μF;1206≥10μF</td></tr>
<tr><td>35V: 0603≥1μF;</td></tr>
<tr><td>25V: 0201≥0.1μF; 0402≥0.22μF;
0603≥10μF;1206≥22μF</td></tr>
<tr><td>16V: 0603≥10μF</td></tr>
<tr><td>10V: 0201>0.1μF; 0603≥10μF; 0805≥47μF</td></tr>
<tr><td>6.3V: 0201≥0.1μF; 1206≥10μF</td></tr>
<tr><td>4V:0603≥22μF; 0805≥47μF</td></tr>
</table></td></tr>
<tr><td>6</td><td>Temperature Coefficient</td><td>With no electrical load.
<table>
<tr><td>T.C.</td><td>Operating Temp</td></tr>
<tr><td>NPO</td><td>-55~125°C at 25°C</td></tr>
<tr><td>X7R</td><td>-55~125°C at 25°C</td></tr>
<tr><td>X5R</td><td>-55~ 85°C at 25°C</td></tr>
<tr><td>X6S</td><td>-55~105°C at 25°C</td></tr>
<tr><td>Y5V</td><td>-25~ 85°C at 20°C</td></tr>
</table></td><td>
<table>
<tr><td>T.C.</td><td>Capacitance Change</td></tr>
<tr><td>NPO</td><td>Within ±30ppm/°C</td></tr>
<tr><td>X7R</td><td>Within ±15%</td></tr>
<tr><td>X5R</td><td>Within ±15%</td></tr>
<tr><td>X6S</td><td>Within ±22%</td></tr>
<tr><td>Y5V</td><td>Within +30%/-80%</td></tr>
</table></td></tr>
<tr><td>7</td><td>Adhesive Strength of Termination</td><td>Pressurizing force:
1N (0201) and 5N (≤0603) and 10N (>0603) * Test time: 10±1 sec.</td><td>No remarkable damage or removal of the terminations.</td></tr>
<tr><td>8</td><td>Vibration Resistance</td><td>Vibration frequency: 10~55 Hz/min.
Total amplitude: 1.5mm
Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.)
Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>No remarkable damage.
Cap change and Q/D.F.: To meet initial spec.</td></tr>
</table>

<table>
<tr><th>No</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>9</td><td>Solderability</td><td>Solder temperature: 235±5°C
Dipping time: 2±0.5 sec.</td><td>95% min. coverage of all metalized area.</td></tr>
<tr><td>10.</td><td>Bending Test</td><td>The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm and then the pressure shall be maintained for 5±1 sec. Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>No remarkable damage.
Cap change:
NP0: within ±5% or 0.5pF whichever is larger
X7R, X5R, X6S: within ±12.5%
Y5V: within ±30%
(This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)</td></tr>
<tr><td>11</td><td>Resistance to Soldering Heat</td><td>Solder temperature: 260±5°C
Dipping time: 10±1 sec
Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder.
Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.
Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>No remarkable damage.
Cap change:
NP0: within ±2.5% or 0.25pF whichever is larger
X7R, X5R, X6S: within ±7.5%
Y5V: within ±20%
Q/D.F., I.R. and dielectric strength: To meet initial requirements.
25% max. leaching on each edge.</td></tr>
<tr><td>12</td><td>Temperature Cycle</td><td>Conduct the five cycles according to the temperatures and time.
<table>
<tr><th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr>
<tr><td>1</td><td>Min. operating temp. +0/-3</td><td>30±3</td></tr>
<tr><td>2</td><td>Room temp.</td><td>2~3</td></tr>
<tr><td>3</td><td>Max. operating temp. +3/-0</td><td>30±3</td></tr>
<tr><td>4</td><td>Room temp.</td><td>2~3</td></tr>
</table>
Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.
Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>No remarkable damage.
Cap change:
NP0: within ±2.5% or 0.25pF whichever is larger
X7R, X5R, X6S: within ±7.5%
Y5V: within ±20%
Q/D.F., I.R. and dielectric strength: To meet initial requirements.</td></tr>
</table>

<table>
<tr><th>No</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>13</td><td>Humidity
(Damp Heat)
Steady State</td><td>Test temp.: 40±2°C
Humidity: 90~95% RH
Test time: 500+24/-0hrs.
Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.
Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>No remarkable damage.
Cap change:
NP0: within ±5% or 0.5pF whichever is larger
X7R, X5R, X6S: ≥10V**,within ±12.5%; ≦6.3V within ±25%;
TT series & C≥ 1uF,within ±25%
**10V: 0603≧4.7μF;0402≧1μF;0201≧0.1μF, within ±25%;
Y5V: ≥10V, within ±30%; ≦6.3V, within +30/-40%
Q/D.F. value:
NP0: More than 30pF Q≥350, 10pF≤C≤30pF, Q≥275+2.5C
Less than 10pF Q≥200+10C
X7R, X5R, X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="2">≧100V</td><td rowspan="2">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7.5%</td><td>0805>0.1μF, 0603≧0.068μF</td></tr>
<tr><td rowspan="3">≧50V</td><td rowspan="3">≦3%</td><td>≦6%</td><td>0201(50V); 0603≧0.047μF;
0805≧0.18μF;1206≧0.47μF</td></tr>
<tr><td>≦10%</td><td>1210≧4.7μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.1μF; 0603≧1μF;
0805≧1μF;1206≧4.7μF; 1210≧10μF
TT series</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF; 0805≥2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF; 1206≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0402≧0.10μF;0603≧0.47μF;0805≧2.2
μF; 1206≧6.8μF ; 1210≧22μF; TT series</td></tr>
<tr><td>≦20%</td><td>0402≧1μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.01μF; 0402≧0.033μF;
0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧0.47μF;
0603≧0.68μF;0805≧2.2μF; 1206≧4.7μF;
1210≧22μF; TT series</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦7.5%</td><td>≦15%</td><td>0201≧0.012μF 0402≧0.33μF;
0603≧0.33μF; 0805≧2.2μF; 1206≧2.2μF;
1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0201≧0.1μF; 0402≧1μF TT series</td></tr>
<tr><td>6.3V</td><td>≦15%</td><td>≦30%</td><td>0201≧0.1μF;0402≧1μF;0603≧10μF;
0805≧4.7μF; 1206≧47μF :1210≧100μF;
TT series</td></tr>
<tr><td>4V</td><td>≦20%</td><td>-</td><td>-</td></tr>
</table></td></tr>
</table>

<table>
<tr><th>No</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>13</td><td></td><td></td><td>Y5V:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td>≧50V</td><td>7.5%</td><td>10%</td><td>0603≧0.1μF; 0805≧0.47μF; 1206≧4.7μF</td></tr>
<tr><td>35V</td><td>10%</td><td>-</td><td>-</td></tr>
<tr><td rowspan="2">25V</td><td rowspan="2">7.5%</td><td>10%</td><td>0402≧0.047μF;0603≧0.1μF;
0805≧0.33μF;1206≧1μF; 1210≧4.7μF</td></tr>
<tr><td>15%</td><td>0402≧0.068μF; 0603≧0.47μF;
1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">16V
(C<1μF)</td><td rowspan="2">10%</td><td>12.5%</td><td>0402≧0.068μF; 0603≧0.68μF</td></tr>
<tr><td>20%</td><td>0402≧0.22μF</td></tr>
<tr><td>16V
(C≧1.0μF)</td><td>12.5%</td><td>20%</td><td>0603≧2.2μF; 0805≧3.3μF; 1206≧10μF;
1210≧22μF; 1812≧47μF</td></tr>
<tr><td>10V</td><td>20%</td><td>30%</td><td>0402≧0.47μF</td></tr>
<tr><td>6.3V</td><td>30%</td><td>-</td><td>-</td></tr>
</table>
*I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller.
Class II (X7R, X5R, X6S, Y5V)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: X7R</td><td rowspan="8">1GΩ or
RxC≧10 Ω-F
whichever is
smaller.</td></tr>
<tr><td>50V: 0402≥0.1μF;0603≥1μF;0805≥1μF;
1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0603≥1μF; 0805≥2.2μF;1210≧10μF</td></tr>
<tr><td>25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;
1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;
1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47
μF;0805≥2.2μF;</td></tr>
<tr><td>1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V ; 4V</td></tr>
</table></td></tr>
<tr><td>14</td><td>Humidity
(Damp Heat)
Load</td><td>Test temp.: 40±2°C
Humidity: 90~95%RH
Test time: 500+24/-0 hrs.
To apply voltage : rated voltage.
Before initial measurement (Class II only): To apply test voltage for 1hr at 40°C and then set for 24±2 hrs at room temp.
Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>No remarkable damage.
Cap change:
NP0: ±7.5% or 0.75pF whichever is larger.
X7R, X5R, X6S: ≥10V**,within ±12.5%; ≦6.3V within ±25%;
TT series & C≥ 1uF,within ±25%
**10V: 0603≧4.7μF;0402≧1μF;0201≧0.1μF, within ±25%;
Y5V: ≥10V, within ±30%; ≦6.3V, within +30/-40%
Q/D.F. value:
NP0: C≥30pF,Q≥200;C<30pF, Q≥100+10/3C</td></tr>
</table>

<table>
<tr><th>No</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>14</td><td>Humidity (Damp Heat) Load</td><td></td><td>
X7R, X5R, X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="2">≧100V</td><td rowspan="2">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7.5%</td><td>0805>0.1μF, 0603≧0.068μF</td></tr>
<tr><td rowspan="3">≧50V</td><td rowspan="3">≦3%</td><td>≦6%</td><td>0201(50V); 0603≧0.047μF;
0805≧0.18μF;1206≧0.47μF</td></tr>
<tr><td>≦10%</td><td>1210≧4.7μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.1μF; 0603≧1μF;
0805≧1μF;1206≧4.7μF; 1210≧10μF
TT series</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF; 0805≥2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF; 1206≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0402≧0.10μF;0603≧0.47μF;0805≧2.2
μF; 1206≧6.8μF ; 1210≧22μF; TT series</td></tr>
<tr><td>≦20%</td><td>0402≧1μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.01μF; 0402≧0.033μF;
0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧0.47μF;
0603≧0.68μF; 0805≧2.2μF; 1206≧4.7μF;
1210≧22μF; TT series</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦7.5%</td><td>≦15%</td><td>0201≧0.012μF 0402≧0.33μF; (0402/
X7R≧0.22μF); 0603≧0.33μF;
0805≧2.2μF; 1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0201≧0.1μF; 0402≧1μF; TT series</td></tr>
<tr><td>6.3V</td><td>≦15%</td><td>≦30%</td><td>0201≧0.1μF;0402≧1μF;0603≧10μF;
0805≧4.7μF; 1206≧47μF :1210≧100μF;
TT series</td></tr>
<tr><td>4V</td><td>≦20%</td><td>-</td><td>-</td></tr>
</table>
Y5V:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td>≧50V</td><td>7.5%</td><td>10%</td><td>0603≧0.1μF; 0805≧0.47μF; 1206≧4.7μF</td></tr>
<tr><td>35V</td><td>10%</td><td>-</td><td>-</td></tr>
<tr><td rowspan="2">25V</td><td rowspan="2">7.5%</td><td>10%</td><td>0402≧0.047μF;0603≧0.1μF;
0805≧0.33μF;1206≧1μF; 1210≧4.7μF</td></tr>
<tr><td>15%</td><td>0402≧0.068μF; 0603≧0.47μF;
1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">16V
(C<1μF)</td><td rowspan="2">10%</td><td>12.5%</td><td>0402≧0.068μF; 0603≧0.68μF</td></tr>
<tr><td>20%</td><td>0402≧0.22μF</td></tr>
<tr><td>16V
(C≧1.0μF)</td><td>12.5%</td><td>20%</td><td>0603≧2.2μF; 0805≧3.3μF; 1206≧10μF;
1210≧22μF; 1812≧47μF</td></tr>
<tr><td>10V</td><td>20%</td><td>30%</td><td>0402≧0.47μF</td></tr>
<tr><td>6.3V</td><td>30%</td><td>-</td><td>-</td></tr>
</table>
</td></tr>
</table>

<table>
<tr><th>No</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>14</td><td>Humidity (Damp Heat) Load</td><td></td><td>*I.R.: ≥10V, 500MΩ or 25 Ω-F whichever is smaller.
Class II (X7R, X5R, X6S, Y5V)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: X7R</td><td rowspan="8">500GΩ or RxC≧5 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402≥0.1μF;0603≥1μF;0805≥1μF; 1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0603≥1μF; 0805≥2.2μF;1210≧10μF</td></tr>
<tr><td>25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47 μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V ; 4V ; TT series ; All X6S items</td></tr>
</table></td></tr>
<tr><td>15.</td><td>High Temperature Load (Endurance)</td><td>*Test temp.:
NP0, X7R/X7E: 125±3°C
X6S: 105±3°C
X5R, Y5V: 85±3°C
*Test time: 1000+24/-0 hrs.
*To apply voltage:
1) ≦% of rated voltage.
2) 10V≦Ur<500V:
200% of rated voltage.
3) 500V: 150% of rated voltage.
4) Ur≧630V:
120% of rated voltage.</td><td>No remarkable damage.
Cap change:
NP0: ±3.0% or ±0.3pF whichever is larger
X7R, X5R, X6S: ≥10V**,within ±12.5%; ≦6.3V within ±25%;
TT series & C≥ 1uF,within ±25%
**10V: 0603≧4.7μF;0402≧1μF;0201≧0.1μF, within ±25%;
Y5V: ≥10V, within ±30%; ≦6.3V, within +30/-40%
Q/D.F. value:
NP0: More than 30pF, Q≥350
10pF≤C<30pF, Q≥275+2.5C
Less than 10pF, Q≥200+10C</td></tr>
</table>

<table>
<tr><th>No</th><th>Item</th><th>Test Condition</th><th>Requirements</th></tr>
<tr><td>15</td><td>High Temperature Load (Endurance)</td><td>
5) 100% of rated voltage for below range.
<table>
<tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capaci-tance range</th></tr>
<tr><td>0201</td><td>X5R/X7R/ X6S</td><td>6.3V,10V</td><td>C≧0.1μF</td></tr>
<tr><td>0402</td><td>X5R/X7R/ X6S</td><td>6.3V,10V</td><td>C≧1.0μF</td></tr>
<tr><td rowspan="3">0603</td><td rowspan="3">X5R/X7R/ X6S</td><td>4V</td><td>C≧22μF</td></tr>
<tr><td>6.3V,10V</td><td>C≧4.7μF</td></tr>
<tr><td>35V</td><td>C≧1.0μF</td></tr>
<tr><td rowspan="2">0805</td><td rowspan="2">X5R/X7R/ X6S</td><td>4V</td><td>C≧47μF</td></tr>
<tr><td>6.3V</td><td>C≧22μF</td></tr>
<tr><td rowspan="2">1206</td><td>X5R/X7R/</td><td>6.3V</td><td>C≧47μF</td></tr>
<tr><td>NP0</td><td>3,000V</td><td>C≧1.5pF</td></tr>
<tr><td>TT18</td><td>Y5V</td><td>6.3V,10</td><td>C≧2.2μF</td></tr>
<tr><td>TT21</td><td>Y5V</td><td>6.3V</td><td>C≧10μF</td></tr>
<tr><td>TT31</td><td>Y5V</td><td>6.3V</td><td>C≧22μF</td></tr>
</table>
(6) 150% of rated voltage for below range.
<table>
<tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capaci-tance range</th></tr>
<tr><td>0201</td><td>X5R/X7R/ X6S</td><td>16V</td><td>C≧0.1μF</td></tr>
<tr><td rowspan="3">0402</td><td rowspan="3">X5R/X7R/ X6S</td><td>50V</td><td>C≧0.1μF</td></tr>
<tr><td>10V~25V</td><td>C≧0.22μF</td></tr>
<tr><td>Y5V</td><td>16V</td><td>C≧0.47μF</td></tr>
<tr><td rowspan="2">0603</td><td>X5R/X7R/ X6S</td><td>10V,50V</td><td>C≧1.0μF</td></tr>
<tr><td>Y5V</td><td>16V</td><td>C≧2.2μF</td></tr>
<tr><td rowspan="3">0805</td><td>X5R/X7R/ X6S</td><td>10~50V</td><td>C≧4.7μF</td></tr>
<tr><td rowspan="2">X7R</td><td>50V</td><td>C≧2.2μF</td></tr>
<tr><td>100V</td><td>C≧0.47μF</td></tr>
<tr><td>Y5V</td><td>16V</td><td>C≧4.7μF</td></tr>
<tr><td>2220</td><td>X7R</td><td>100V</td><td>C≧6.8μF</td></tr>
</table>
</td><td>
X7R, X5R, X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="2">≧100V</td><td rowspan="2">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7.5%</td><td>0805>0.1μF, 0603≧0.068μF</td></tr>
<tr><td rowspan="3">≧50V</td><td rowspan="3">≦3%</td><td>≦6%</td><td>0201(50V); 0603≧0.047μF; 0805≧0.18μF;1206≧0.47μF</td></tr>
<tr><td>≦10%</td><td>1210≧4.7μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.1μF; 0603≧1μF; 0805≧1μF;1206≧4.7μF; 1210≧10μF TT series</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF; 0805≥2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF; 1206≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0402≧0.10μF;0603≧0.47μF;0805≧2.2 μF; 1206≧6.8μF ; 1210≧22μF; TT series</td></tr>
<tr><td>≦20%</td><td>0402≧1μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.01μF; 0402≧0.033μF; 0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧0.47μF; 0603≧0.68μF;0805≧2.2μF; 1206≧4.7μF; 1210≧22μF; TT series</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦7.5%</td><td>≦15%</td><td>0201≧0.012μF 0402≧0.33μF; 0603≧0.33μF; 0805≧2.2μF; 1206≧2.2μF; 1210≧22μF;</td></tr>
<tr><td>≦20%</td><td>0201≧0.1μF; 0402≧1μF</td></tr>
<tr><td>6.3V</td><td>≦15%</td><td>≦30%</td><td>0201≧0.1μF;0402≧1μF;0603≧10μF; 0805≧4.7μF; 1206≧47μF :1210≧100μF; TT series</td></tr>
<tr><td>4V</td><td>≦20%</td><td>-</td><td>-</td></tr>
</table>
Y5V:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td>≧50V</td><td>7.5%</td><td>10%</td><td>0603≧0.1μF; 0805≧0.47μF; 1206≧4.7μF</td></tr>
<tr><td>35V</td><td>10%</td><td>-</td><td>-</td></tr>
<tr><td rowspan="2">25V</td><td rowspan="2">7.5%</td><td>10%</td><td>0402≧0.047μF;0603≧0.1μF; 0805≧0.33μF;1206≧1μF; 1210≧4.7μF</td></tr>
<tr><td>15%</td><td>0402≧0.068μF; 0603≧0.47μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">16V (C<1μF)</td><td rowspan="2">10%</td><td>12.5%</td><td>0402≧0.068μF; 0603≧0.68μF</td></tr>
<tr><td>20%</td><td>0402≧0.22μF</td></tr>
<tr><td>16V (C≧1.0μF)</td><td>12.5%</td><td>20%</td><td>0603≧2.2μF; 0805≧3.3μF; 1206≧10μF; 1210≧22μF; 1812≧47μF</td></tr>
<tr><td>10V</td><td>20%</td><td>30%</td><td>0402≧0.47μF</td></tr>
<tr><td>6.3V</td><td>30%</td><td>-</td><td>-</td></tr>
</table>
</td></tr>
</table>

No	Item	Test Condition	Requirements
15	High Temperature Load (Endurance	*Before initial measurement (Class II only): To apply test voltage for 1hr at test temp. and then set for 24±2 hrs at room temp. *Measurement to be made after keeping at room temp. for 24±2 hrs 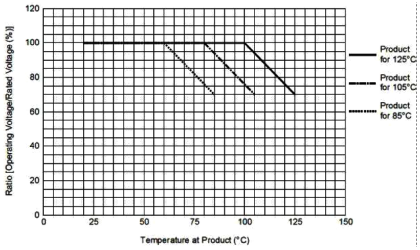	*I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X5R, X6S, Y5V) 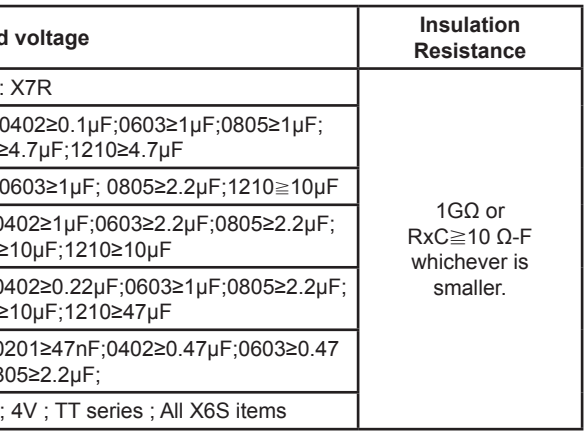

Rated voltage	Insulation Resistance
100V: X7R	1GΩ or RxC≧10 Ω-F whichever is smaller.
50V: 0402≥0.1μF;0603≥1μF;0805≥1μF; 1206≥4.7μF;1210≥4.7μF	
35V: 0603≥1μF; 0805≥2.2μF;1210≧10μF	
25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF	
16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF	
10V:0201≥47nF;0402≥0.47μF;0603≥0.47 μF;0805≥2.2μF;	
6.3V ; 4V ; TT series ; All X6S items	

Appendixes

Tape & Reel Dimensions

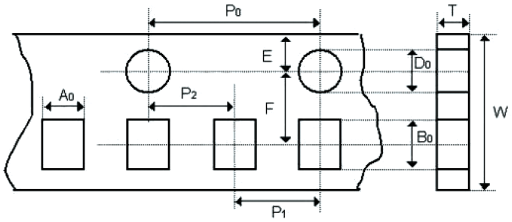

The dimension of paper tape

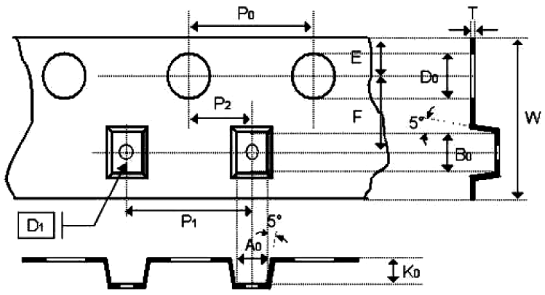

The dimension of plastic tape

Size	0201	0402		0603	0805			1206			1210			1812		
Thick-ness	L	N	E	S, X	A	B	C, D, I	B	C, J, D	G,P	C, D	G, K	M	D, K	M	U
A_0	0.38±0.05	0.62±0.05	0.7±0.1	1.02±0.05	1.5±0.1	1.5±0.1	<1.57	2±0.1	<1.85	<1.95	<2.97	<2.97	<2.97	<3.81	<3.81	<3.9
B_0	0.68±0.05	1.12±0.05	1.2±0.1	1.8±0.05	2.3±0.1	2.3±0.1	<2.40	3.5±0.1	<3.46	<3.67	<3.73	<3.73	<3.73	<5.3	<5.3	<5.3
T	0.42±0.05	0.6±0.05	0.7±0.1	0.95±0.05	0.75±0.05	0.95±0.05	0.23±0.05	0.95±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.25±0.05	0.25±0.05	0.25±0.05
K_0	-	-	-	-	-	-	<2.5	-	<2.5	<2.5	<2.5	<2.5	<3	<2.5	<3	<3.5
W	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	8±0.1	12±0.2	12±0.2	12±0.2
P_0	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1
$10xP_0$	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.1	40±0.2
P_1	2±0.05	2±0.05	2±0.05	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.1	4±0.10	4±0.1	8±0.1	8±0.1	8±0.1
P_2	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05	2±0.05
D_0	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.05	1.5±0.1
D_1	-	-	-	-	-	-	1±0.1	-	1±0.1	1±0.1	1±0.1	1±0.1	1±0.1	1.5±0.1	1.5±0.1	1.5±0.1
E	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1	1.75±0.1
F	3.50±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	3.5±0.05	5.5±0.05	5.5±0.05	5.5±0.05



The dimension of reel

Size	0201, 0402, 0603, 0805, 1206, 1210			1812
Reel size	7”	10”	13”	7”
C	13 +0.5/-0.2	13 +0.5/-0.2	13 +0.5/-0.2	13 +0.5/-0.2
W1	8.4 +1.5/-0	8.4+1.5/-0	8.4 +1.5/-0	12.4+2.0/-0
A	178 ±0.1	250 ±1	330 ±1	178 ±0.1
N	60 +1/-0	100 ±1	100 ±1	60 +1/-0

Constructions:

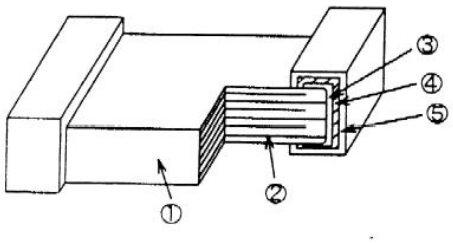

No.	Name		NPO, X7R, X5R, X6S, Y5V
1	Ceramic material		$BaTiO_3$ based
2	Inner electrode		Ni
3	Termination	Inner layer	Cu
4		Middle layer	Ni
5		Outer layer	Sn

Storage and handling conditions

(1) To store products at 5°C to 40°C ambient temperature and 20 to 70%. related humidity conditions.

(2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)

b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.

c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight,the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

Recommended Soldering Conditions:

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N_2 within oven are recommended.

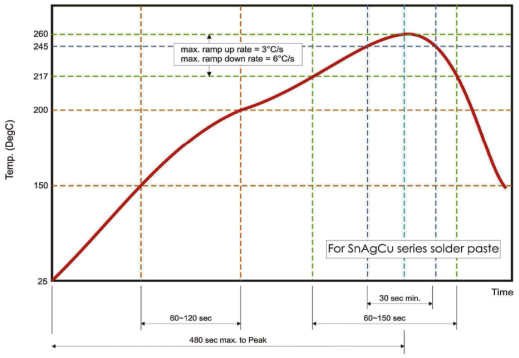

Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

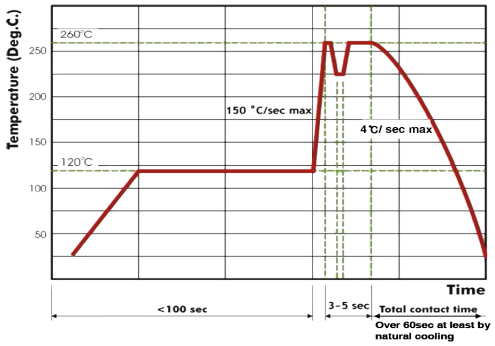

Recommended wave soldering profile for SMT process with SnAgCu series solder.