




23.9	23.5	20.5	18.6	19.3	17.5	53398-1571	15
22.65	22.25	19.25	17.35	18.05	16.25	53398-1471	14
21.4	21	18	16.1	16.8	15	53398-1371	13
20.15	19.75	16.75	14.85	15.55	13.75	53398-1271	12
18.9	18.5	15.5	13.6	14.3	12.5	53398-1171	11
17.65	17.25	14.25	12.35	13.05	11.25	53398-1071	10
16.4	16	13	11.1	11.8	10	53398-0971	9
15.15	14.75	11.75	9.85	10.55	8.75	53398-0871	8
13.9	13.5	10.5	8.6	9.3	7.5	53398-0771	7
12.65	12.25	9.25	7.35	8.05	6.25	53398-0671	6
11.4	11	8	6.1	6.8	5	53398-0571	5
10.15	9.75	6.75	4.85	5.55	3.75	53398-0471	4
8.9	8.5	5.5	3.6	4.3	2.5	53398-0371	3
7.65	7.25	4.25	2.35	3.05	1.25	53398-0271	2
F	E	D	C	B	A	EMBOSSED TAPE PKG. (HIGH BARRIER PKG.)	種数 No. of C&Ts.
						ORDER No.	

REVISED	EC NO: J2016-1122	DRWN:QHE31 CHKD:SAKIYAMA APPR:TKANEKO	2016/04/27 2016/05/06 2016/05/06	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 8:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
					0.25	UNDER	UNDER	± 0.03	DRAWN BY	DATE	TITLE 1.25 W/B CONN. ASS'Y FOR SMT(ST.) -LEAD FREE-			
					0.25	OVER	0.5	UNDER	± 0.05	MNINOMIYA			04/02/06	
					0.5	OVER	1.0	UNDER	± 0.1	CHECKED BY			DATE	
					1.0	OVER	10	UNDER	± 0.2	KTOJO			04/02/06	
					10	OVER	30	UNDER	± 0.25	APPROVED BY			DATE	
					30	OVER		± 0.3	MSASAO	04/02/06	DOCUMENT NO. SD-53398-032		SHEET NO. 2 OF 2	
					ANGULAR			±3 °	MATERIAL NO.					
									SEE CHART					
					REV	T				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

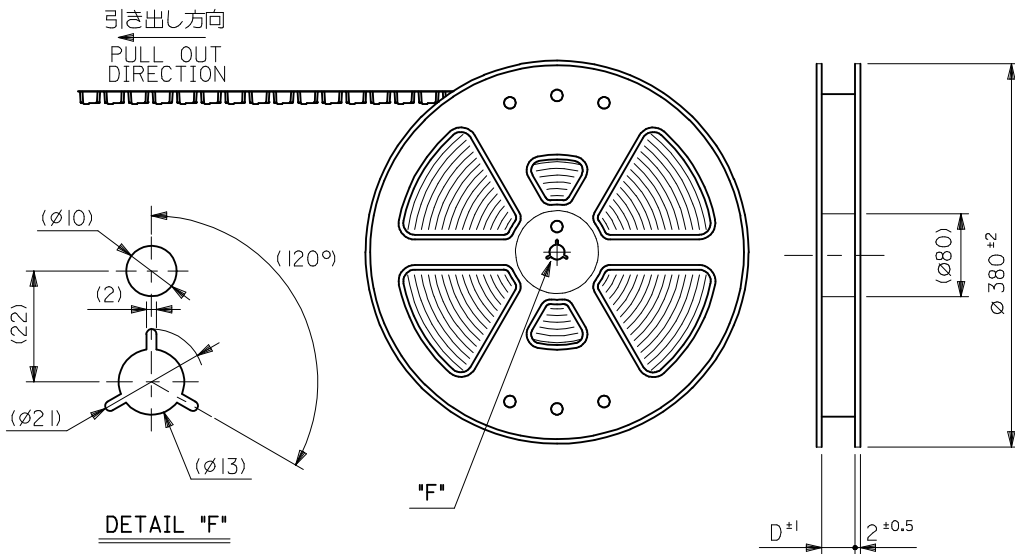


NOTES

1. 梱包数量: 1000個/リール
NUMBER OF CONNECTOR: 1000PCS/REEL
2. リードテープ長さ
LEAD TAPE LENGTH

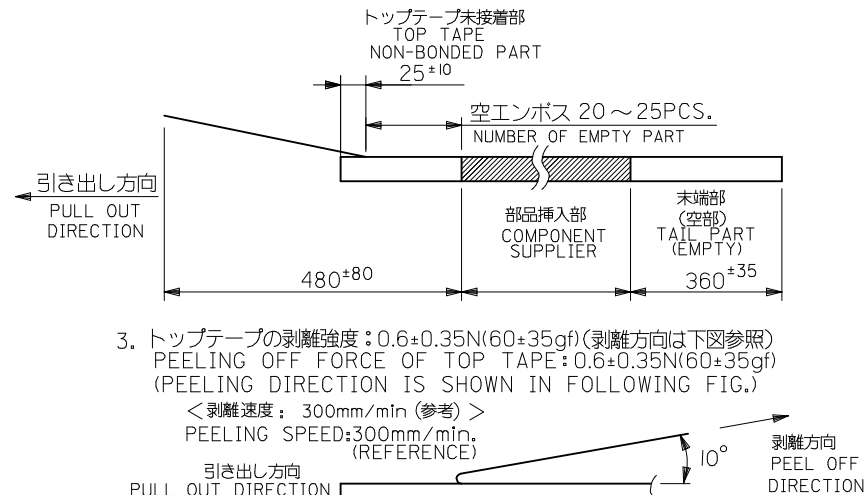

3. トップテープの剥離強度: $0.6 \pm 0.35N(60 \pm 35gf)$ (剥離方向は下図参照)
PEELING OFF FORCE OF TOP TAPE: $0.6 \pm 0.35N(60 \pm 35gf)$
(PEELING DIRECTION IS SHOWN IN FOLLOWING FIG.)
<剥離速度: 300mm/min (参考)>
PEELING SPEED: 300mm/min. (REFERENCE)
4. 53398-**-19 の詳細寸法については図面 SD-53398-032 を参照下さい。
RE DETAILED DIMENSIONS, SEE SD-53398-032.
5. 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE): ポリプロピレン (POLYPROPYLENE)
トップテープ (TOP TAPE): PET, PE, PEF
リール (REEL): ポリスチレン (P.S.) <リサイクル材含む>
POLYSTYRENE (P.S.) <RECYCLE MATERIAL CONTAINED>
6. 本製品は 53398-**-90 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 53398-**-90.
7. 本製品は乾燥剤入り、ハイバリア梱包仕様である。
THIS PRODUCT IS HIGH BARRIER PACKAGE WITH DESICCANT.

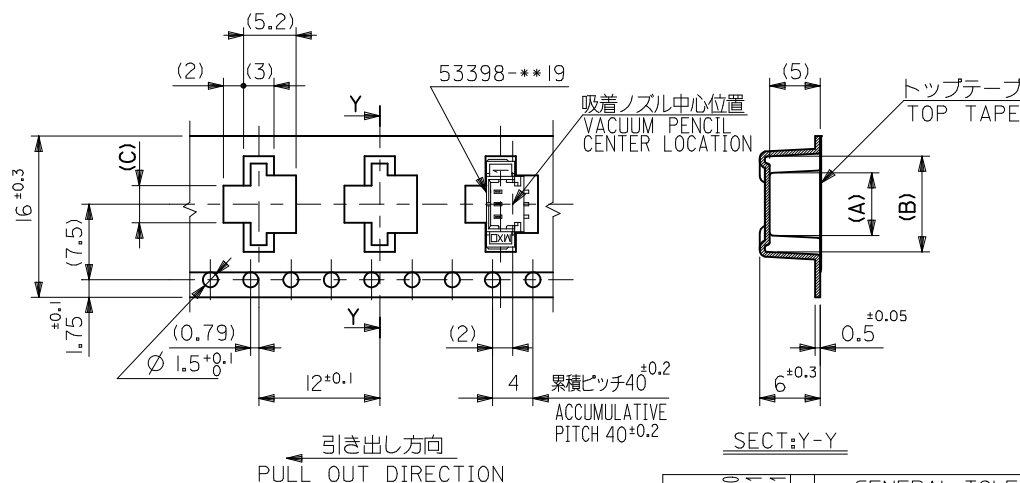

16幅テープ
(TAPE WIDTH: 16)

16	21.4	17.4	3.7	9.5	5.8	53398-0371	3
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	2.45	8.25	4.55	53398-0271	2
			(C)	(B)	(A)	MATERIAL NO.	極数 CKT.

REVISED EC NO.: J2009-2060 DRAWN: IKON CHKD: MATSUMOTO APPR: NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	NINOMIYA	DATE '04/02/06	TITLE 1.25 W/B CONN WAFER ASSY FOR SMT. EMBSTP. PKG. -LEAD FREE-	MOLEX MOLEX INCORPORATED	SHEET NO. 1 OF 3	
		10 OVER 30 UNDER	± 0.25	CHECKED BY K. TOJO	DATE '04/02/06				
		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE '04/02/06				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE & SHEET 2.3		SD-53398-033			
		REV		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F


E

D

C


B

A

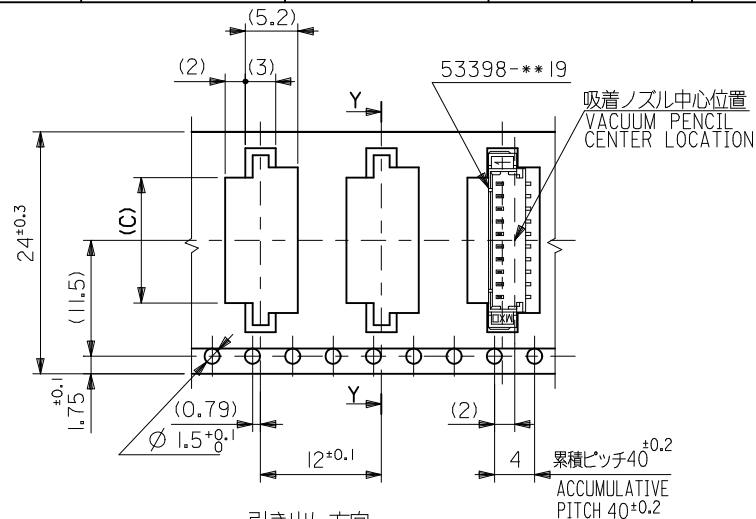


引き出し方向
PULL OUT DIRECTION

24幅テープ
(TAPE WIDTH:24)

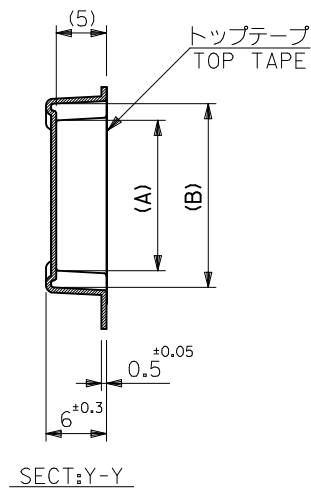


SECT:Y-Y

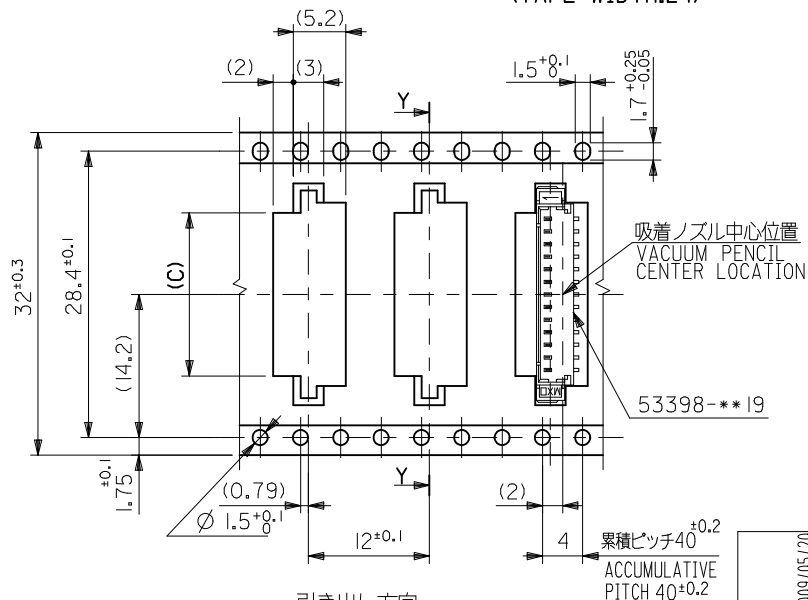

引き出し方向
PULL OUT DIRECTION



32幅テープ
(TAPE WIDTH:32)

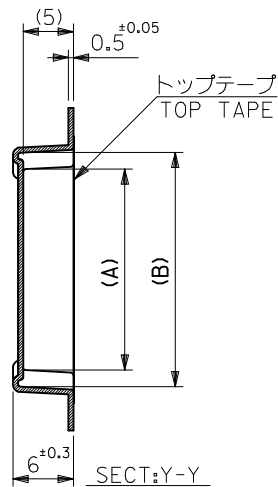

SECT:Y-Y

32	37.4	33.4	16.2	22	18.3	53398-1371	13
			14.95	20.75	17.05	▲ -1271	12
			13.7	19.5	15.8	▲ -1171	11
24	29.4	25.4	12.45	18.25	14.55	▲ -1071	10
			11.2	17	13.3	▲ -0971	9
			9.95	15.75	12.05	▲ -0871	8
			8.7	14.5	10.8	▲ -0771	7
			7.45	13.25	9.55	▲ -0671	6
			6.2	12	8.3	▼ -0571	5
			4.95	10.75	7.05	53398-0471	4
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	MATERIAL NO.	極数 CKT.

REVISED EC NO: J2009-2060 DRWN:TKN CHKD:HMATSUMOTO APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY NINOMIYA	DATE '04/02/06	TITLE 1.25 W/B CONN WAFER ASSY FOR SMT. EMBSTP. PKG. -LEAD FREE-				
		10 OVER 30 UNDER	± 0.25	CHECKED BY K. TOJO	DATE '04/02/06					
		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE '04/02/06	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE & SHEET 13		SD-53398-033				2 OF 3
		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

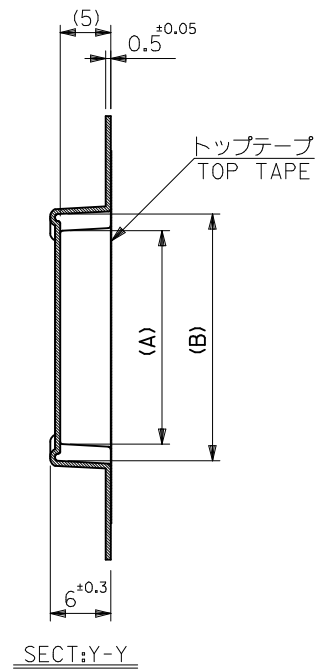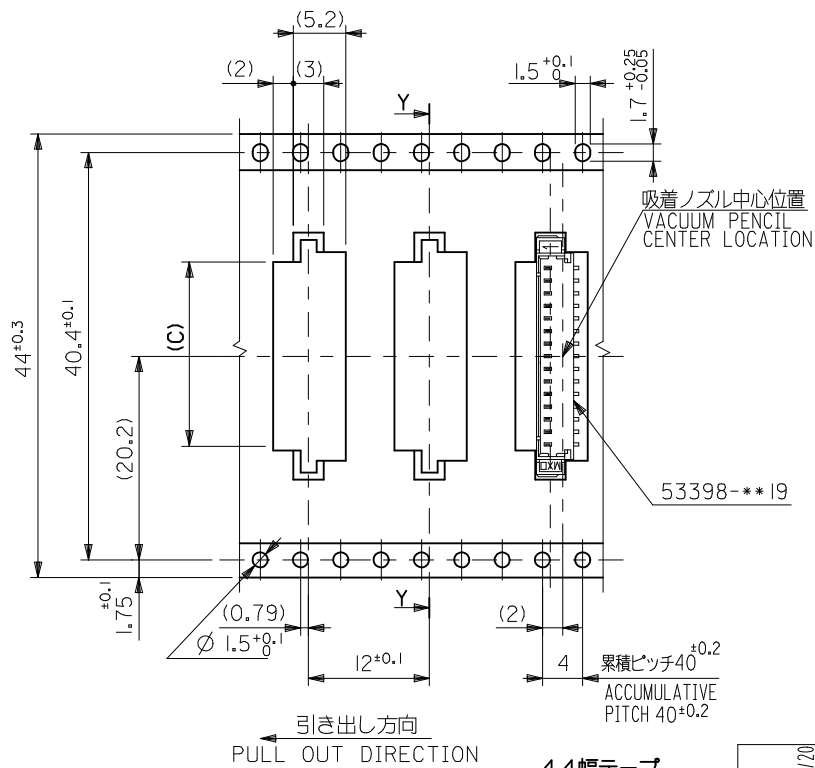

44幅テープ
(TAPE WIDTH:44)

REVISED	EC NO: J2009-2060	2009/05/20
DRWN:TKON	2009/05/21	
CHKD:HMATSUMOTO	2009/05/21	
APPR:NUKITA	2009/05/21	
REV	DESCRIPTION	
B		

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

44		49.4	45.4	18.7 17.45	24.5 23.25	20.8 19.55	53398-1571 53398-1471	15 14
キャリアテープ幅 CARRIER TAPE WIDTH		E	D	(C)	(B)	(A)	MATERIAL NO.	極致 CKT.
DIMENSION STYLE MM ONLY			SCALE ---		DESIGN UNITS METRIC		◎ 第三角 PROJECTION	
DRAWN BY NINOMIYA		DATE '04/02/06		TITLE 1.25 W/B CONN WAFER ASSY FOR SMT. EMBSTP. PKG. -LEAD FREE-				
CHECKED BY K. TOJO		DATE '04/02/06						
APPROVED BY M. SASAO		DATE '04/02/06		MOLEX MOLEX INCORPORATED				
MATERIAL NO.				DOCUMENT NO.				SHEET NO.
SEE TABLE & SHEET 1.2				SD-53398-033				3 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								