
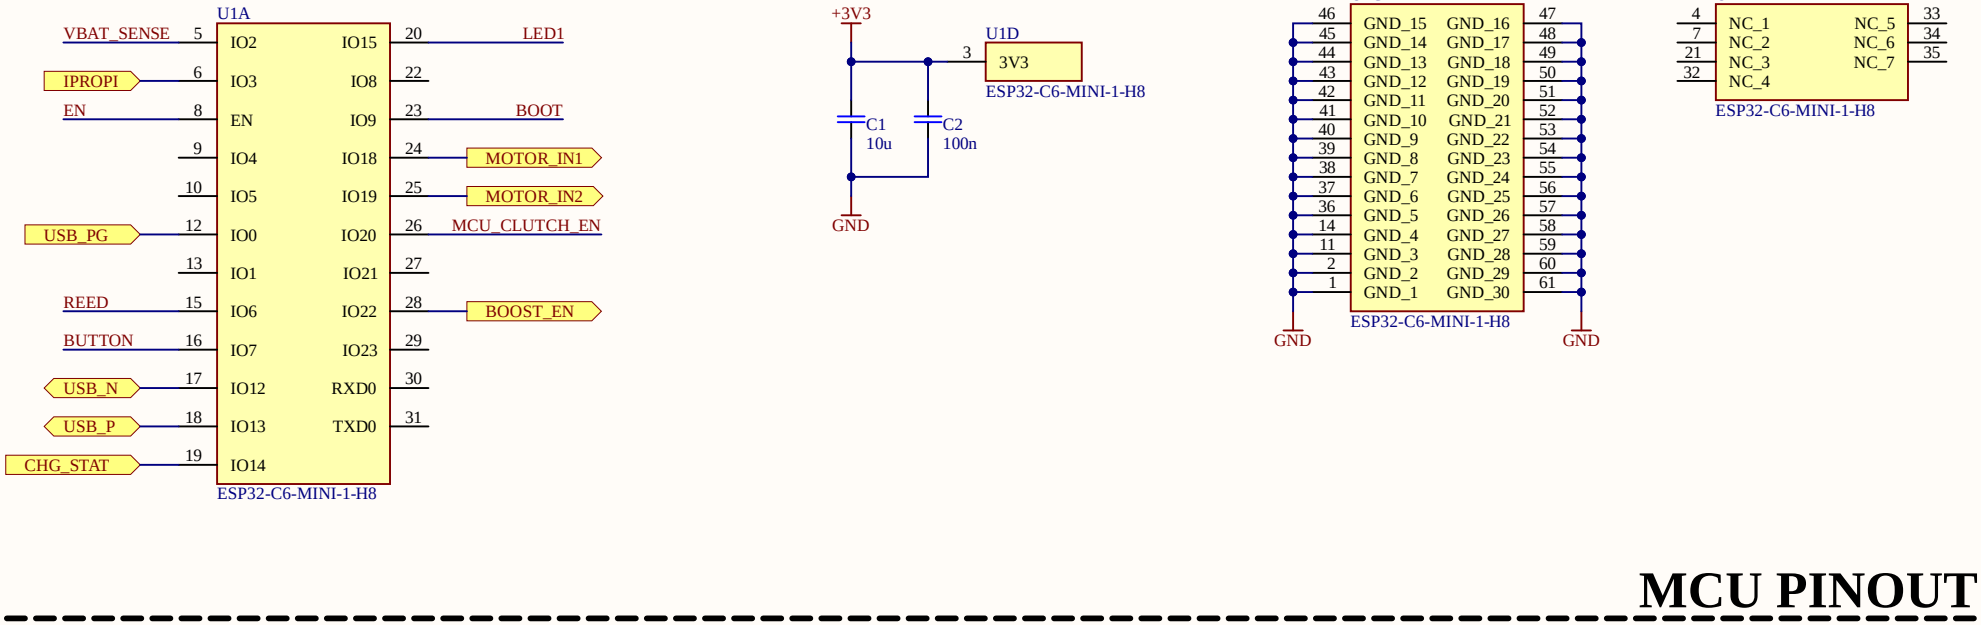
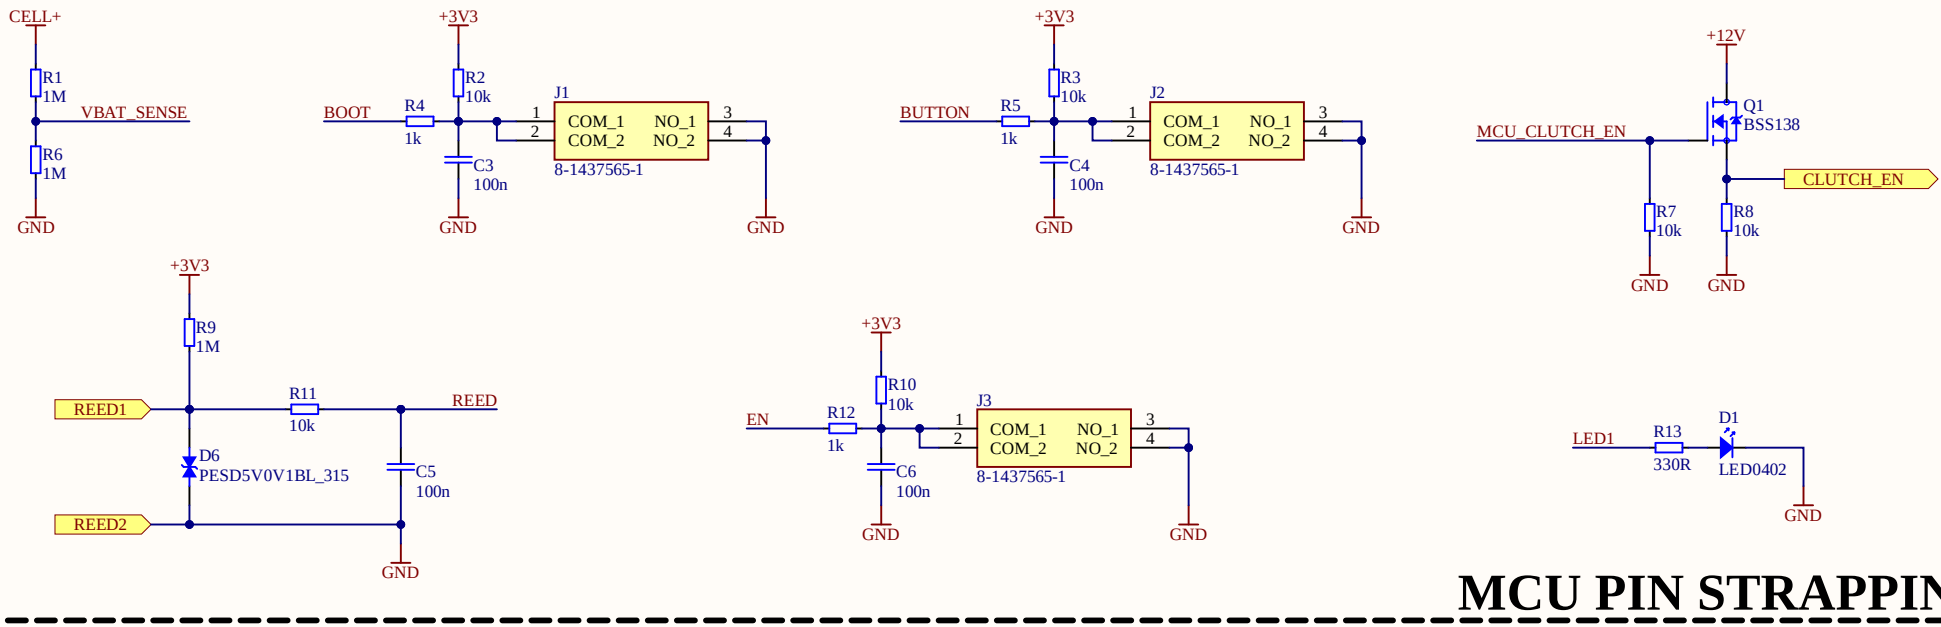



Title		
Size A4	Number	Revision
Date: 10.29.2026		Sheet of
File: C:_Proj\..\FoxSky.Janus.SchDoc		Drawn By:


U1A
VBAT_SENSE
IPROPI
EN
USB_PG
REED
BUTTON
USB_N
USB_P
CHG_STAT
IO2
IO3
EN
IO4
IO5
IO0
IO1
IO6
IO7
IO12
IO13
IO14
IO15
IO8
IO9
IO18
IO19
IO20
IO21
IO22
IO23
RXD0
TXD0
LED1
BOOT
MOTOR_IN1
MOTOR_IN2
MCU_CLUTCH_EN
BOOST_EN
ESP32-C6-MINI-1-H8
+3V3
U1D
3V3
C1
10u
C2
100n
GND
U1C
GND_15
GND_14
GND_13
GND_12
GND_11
GND_10
GND_9
GND_8
GND_7
GND_6
GND_5
GND_4
GND_3
GND_2
GND_1
GND_16
GND_17
GND_18
GND_19
GND_20
GND_21
GND_22
GND_23
GND_24
GND_25
GND_26
GND_27
GND_28
GND_29
GND_30
U1B
NC_1
NC_2
NC_3
NC_4
NC_5
NC_6
NC_7
MCU PINOUT



CELL+
R1
1M
R6
1M
VBAT_SENSE
GND
+3V3
BOOT
R4
1k
R2
10k
C3
100n
J1
COM_1
COM_2
NO_1
NO_2
8-1437565-1
BUTTON
R5
1k
R3
10k
C4
100n
J2
+12V
MCU_CLUTCH_EN
Q1
BSS138
CLUTCH_EN
R7
10k
R8
10k
REED1
REED2
R9
1M
R11
10k
REED
D6
PESD5V0V1BL_315
C5
100n
EN
R12
1k
R10
10k
C6
100n
J3
LED1
R13
330R
D1
LED0402
MCU PIN STRAPPING

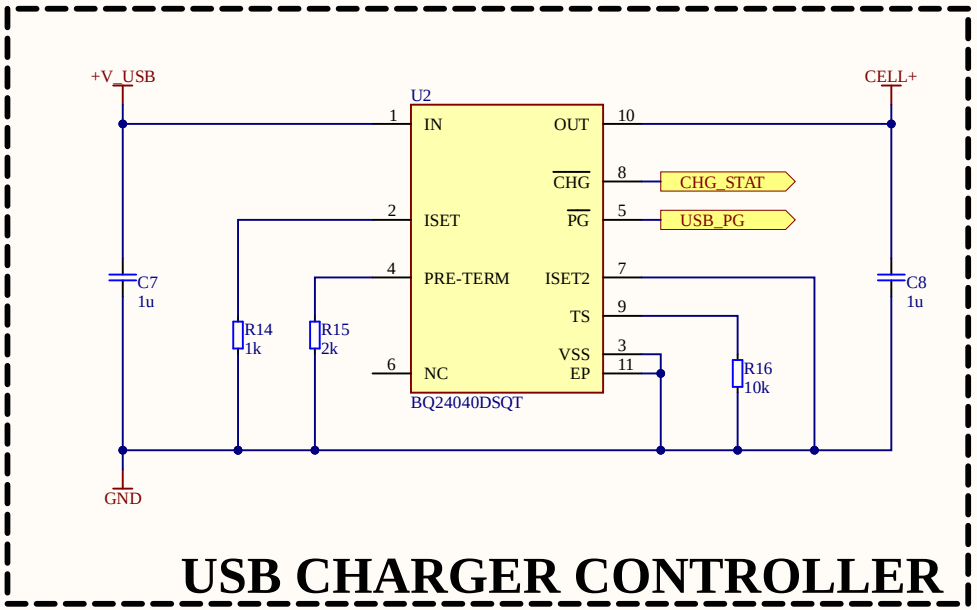


place charging indicating diodes and maybe termistor (103AT) to TS, for now only 10k will replace it

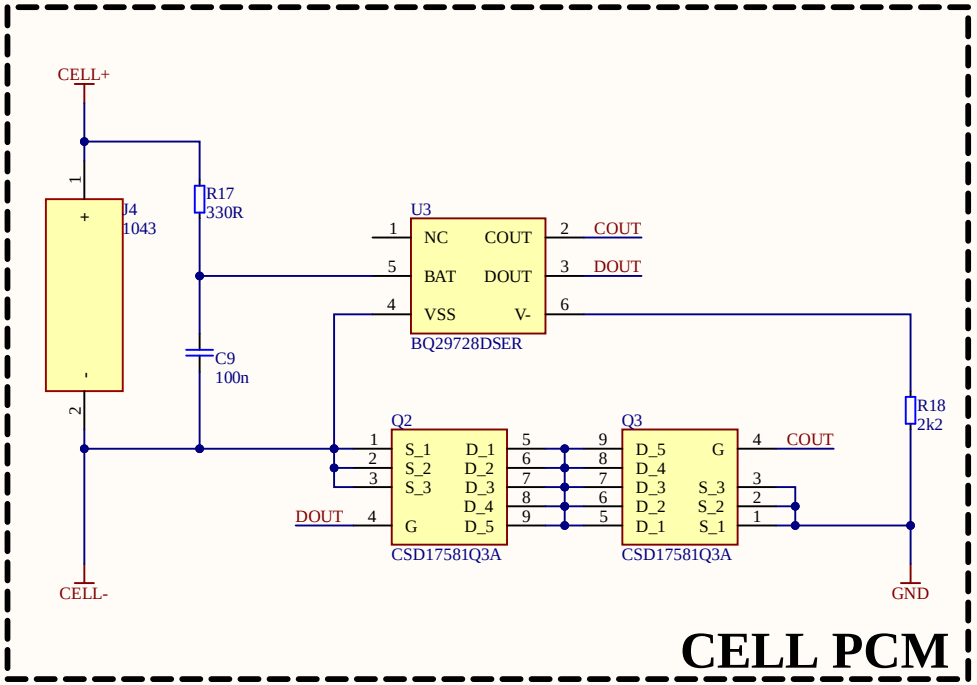


Title		
Size: A4	Number	Revision
Date: 10.29.2026	Sheet of	
File: C:_Proj\..\POWER_CELL_PROTECTION_AND_CHARGING.SchDoc	Drawn By:	

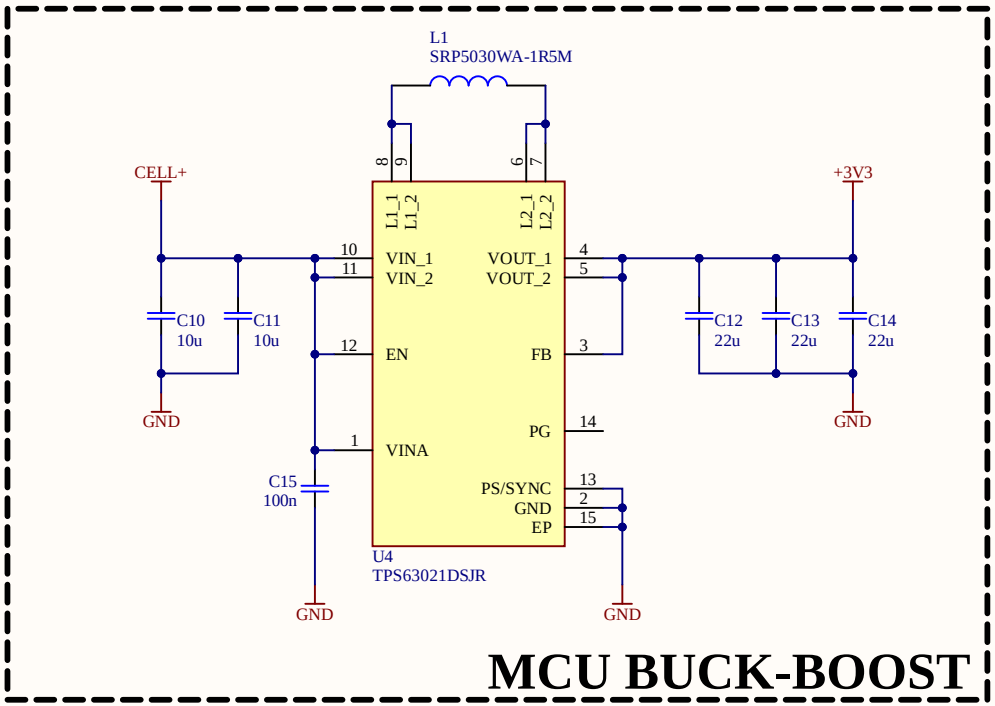

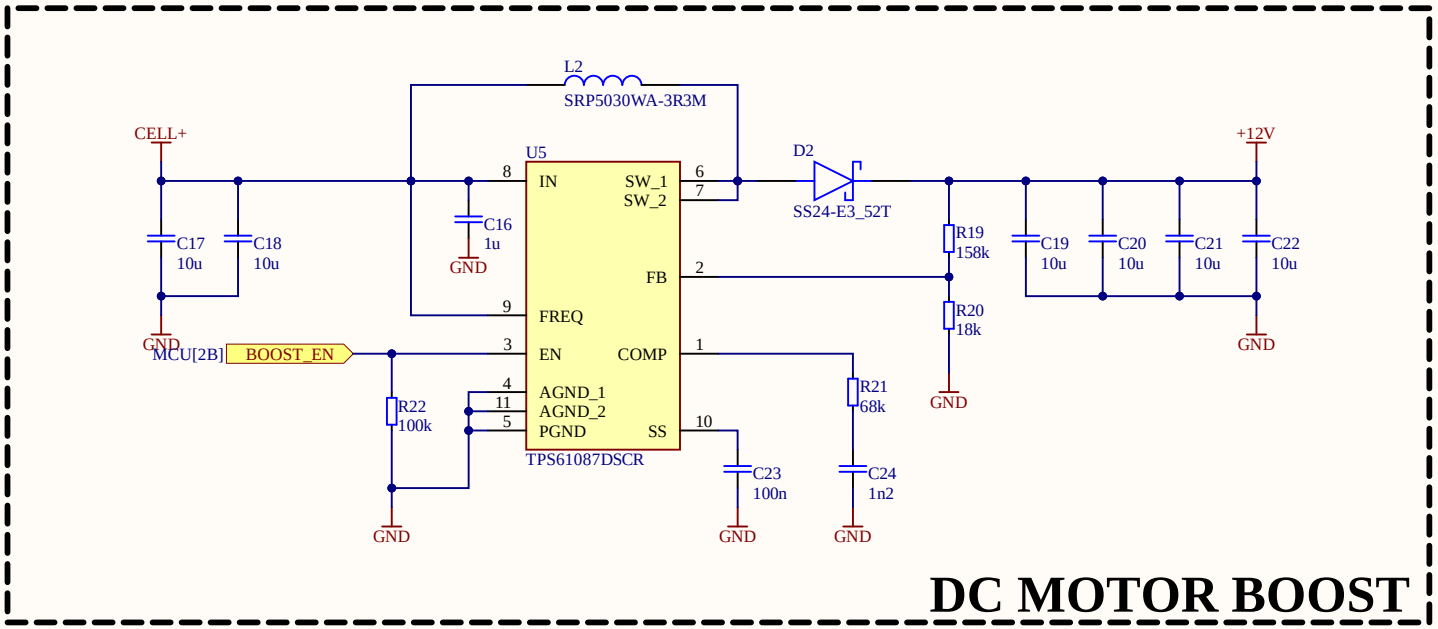


sa we tend to use electromagnetic clutch we need potentially use another 12V boost if the current supply isnt enough

Title		
Size: A4	Number	Revision
Date: 10.29.2026		Sheet of
File: C:_Proj\..\POWER_SUPPLY.SchDoc		Drawn By:

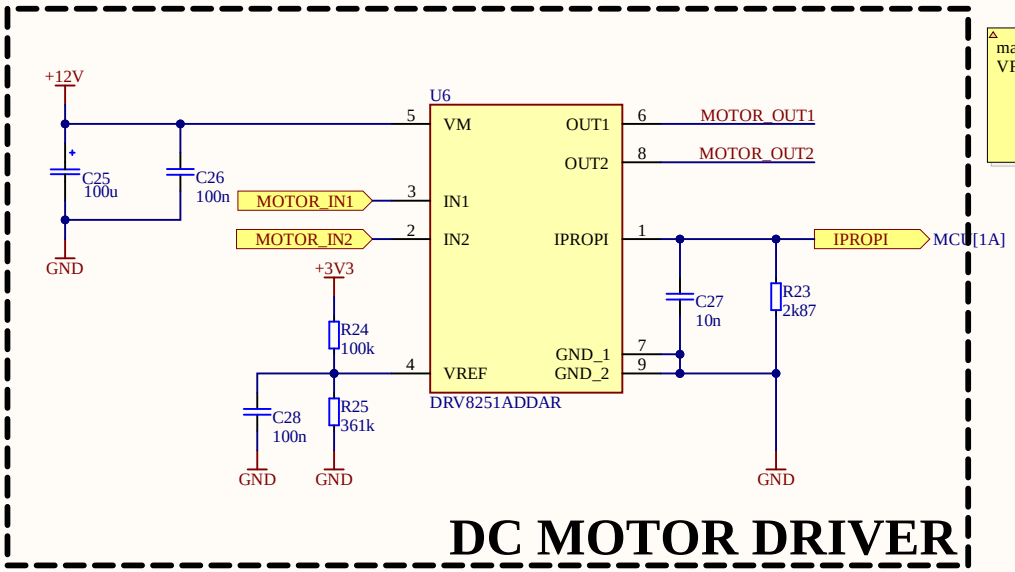

DC MOTOR DRIVER


maybe use BOOST_EN to power the VREF divider

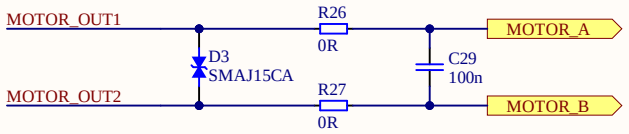


MOTOR LINES PROTECTION

consider building pi filter by placing ferrite beads instead of 0R

Title		
Size: A4	Number	Revision
Date: 10.29.2026		Sheet of
File: C:_Proj\..\MOTOR_DRIVER.SchDoc		Drawn By:

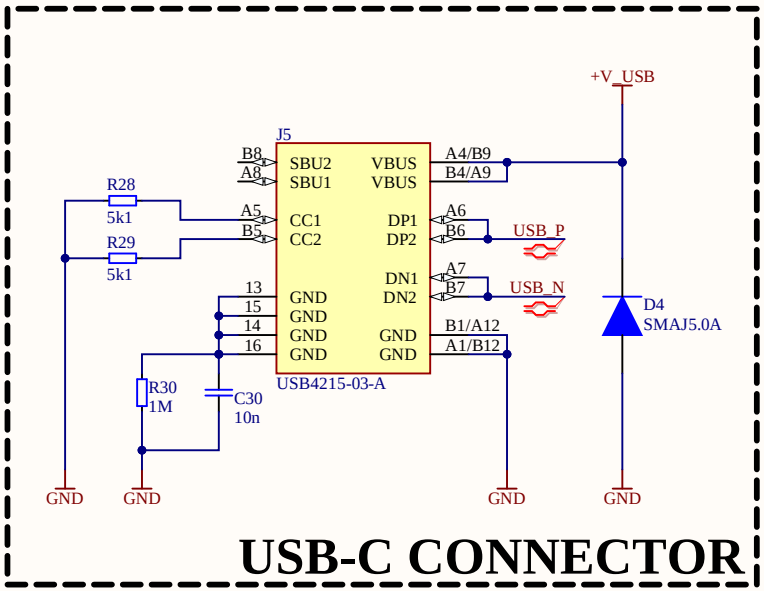

USB-C CONNECTOR

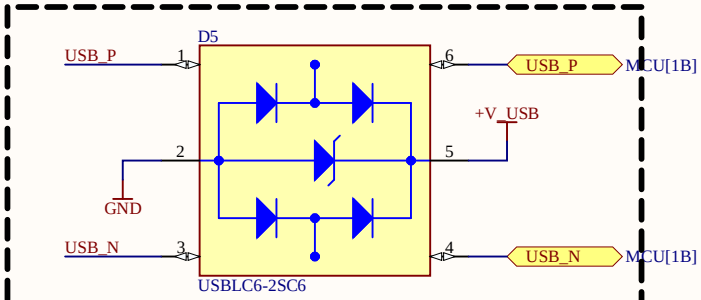

DP PROTECTION

Title		
Size: A4	Number	Revision
Date: 10.29.2026		Sheet of
File: C:_Proj\..\USBC_CONNECTOR.SchDoc		Drawn By:

Board Stack Report