




Title		
Size: A4	Number	Revision
Date: 11.09.2026		Sheet of
File: C:_Proj\..\FoxSky.Janus.SchDoc		Drawn By:

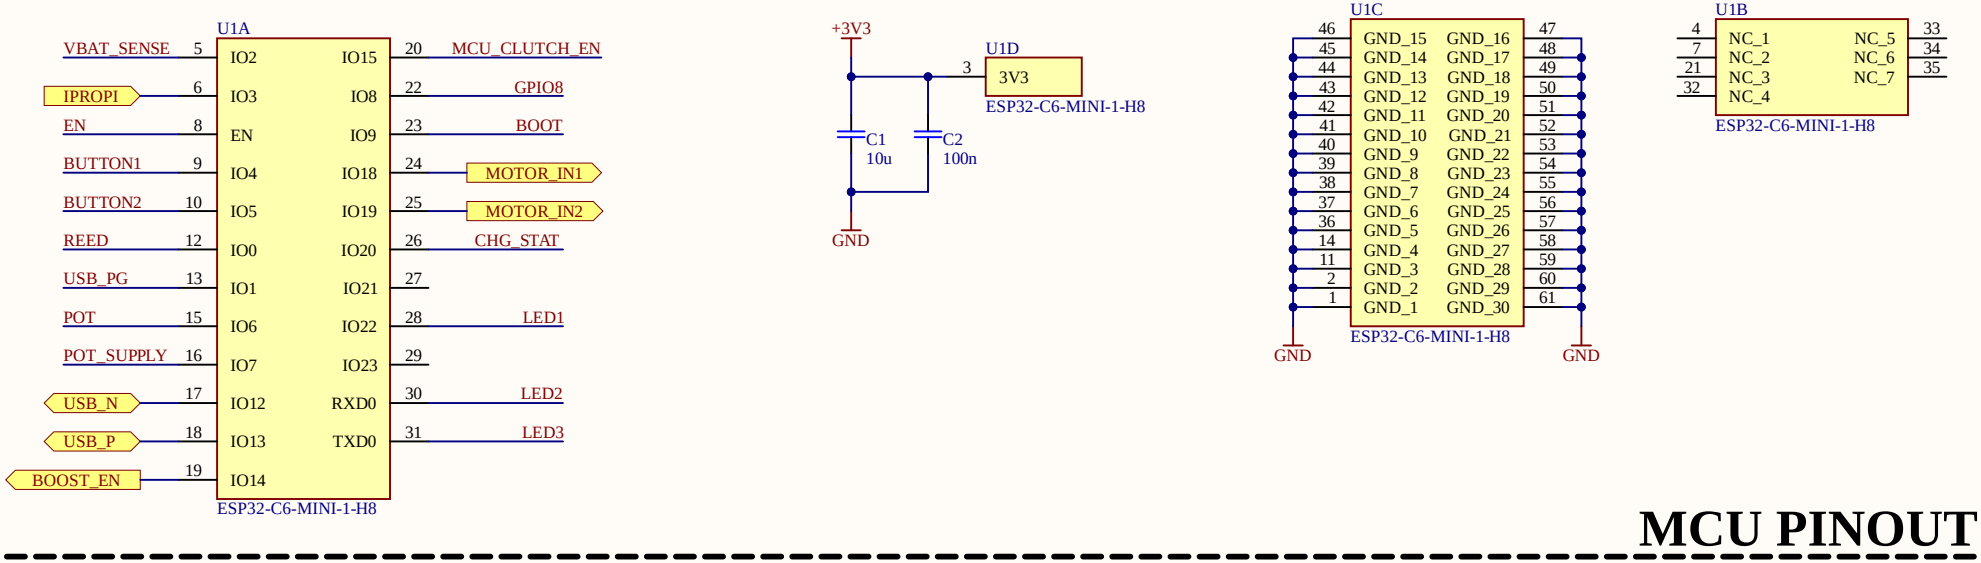


MCU PINOUT

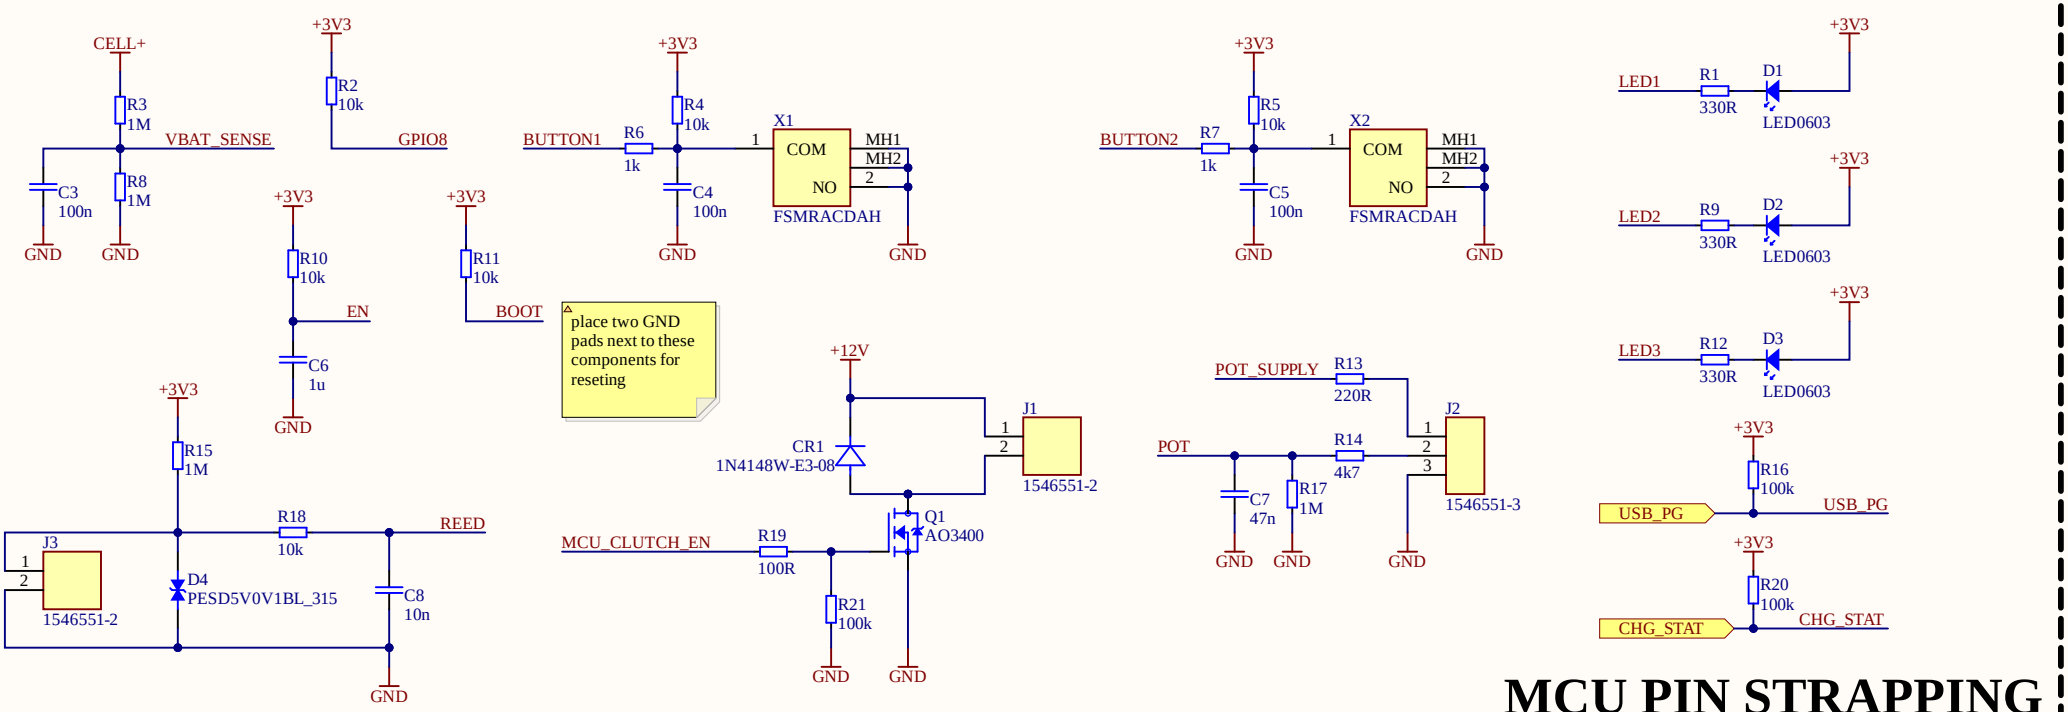


MCU PIN STRAPPING

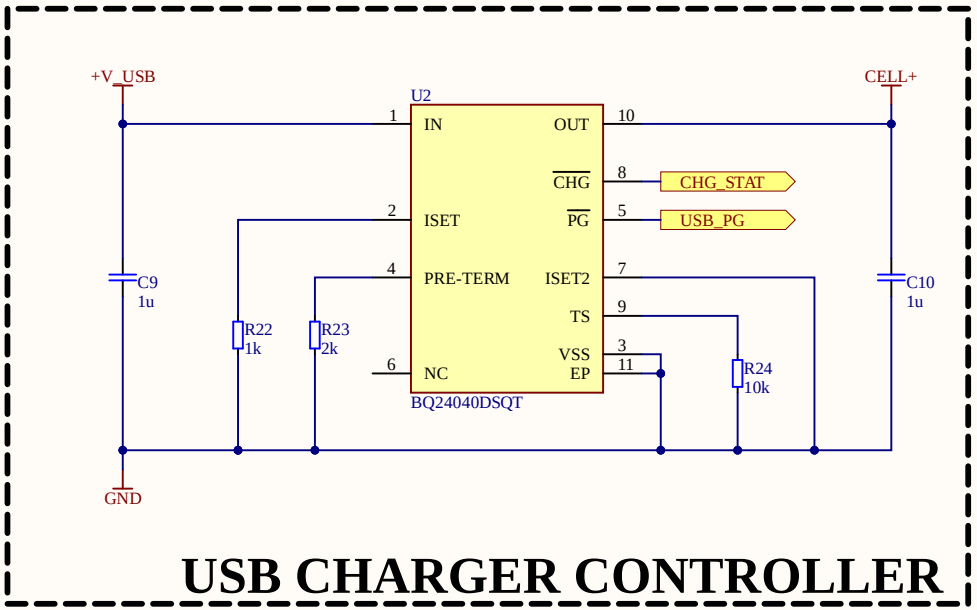


place charging indicating diodes and maybe termistor (103AT) to TS, for now only 10k will replace it

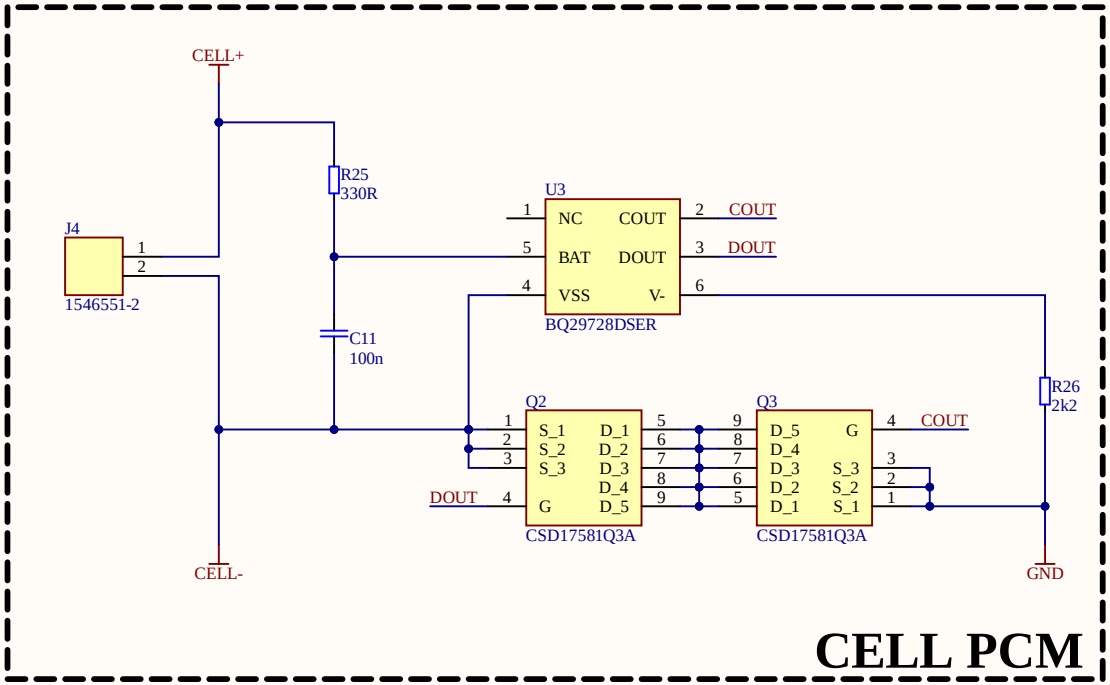


Title		
Size A4	Number	Revision
Date: 11.09.2026	Sheet of	
File: C:_Proj\..\POWER_CELL_PROTECTION_AND_CHARGING.SchDoc	Drawn By:	

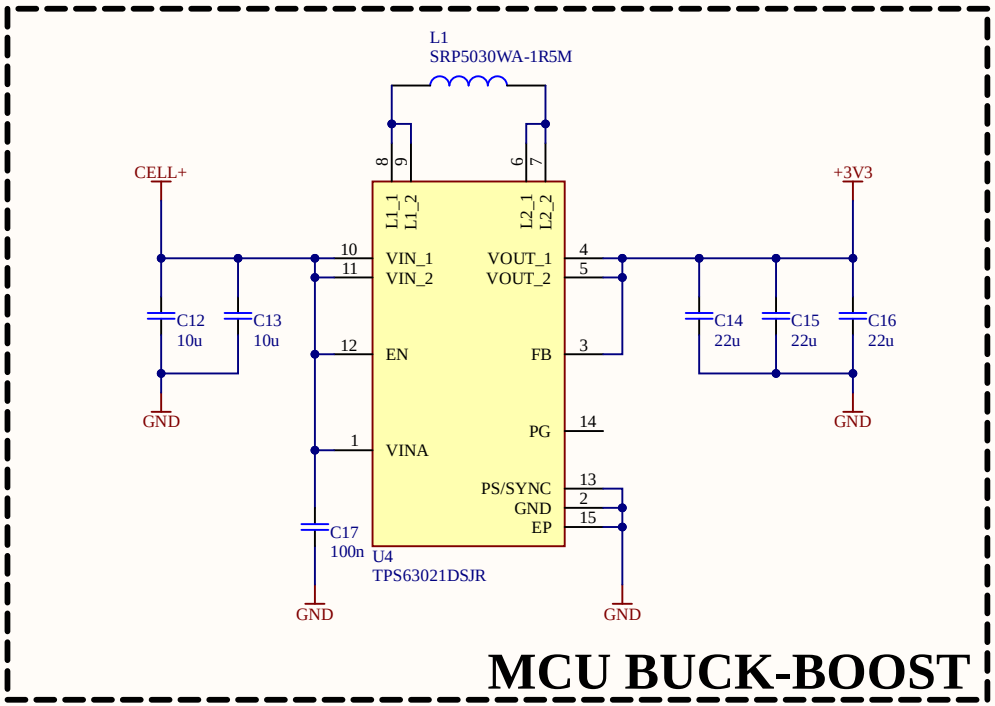

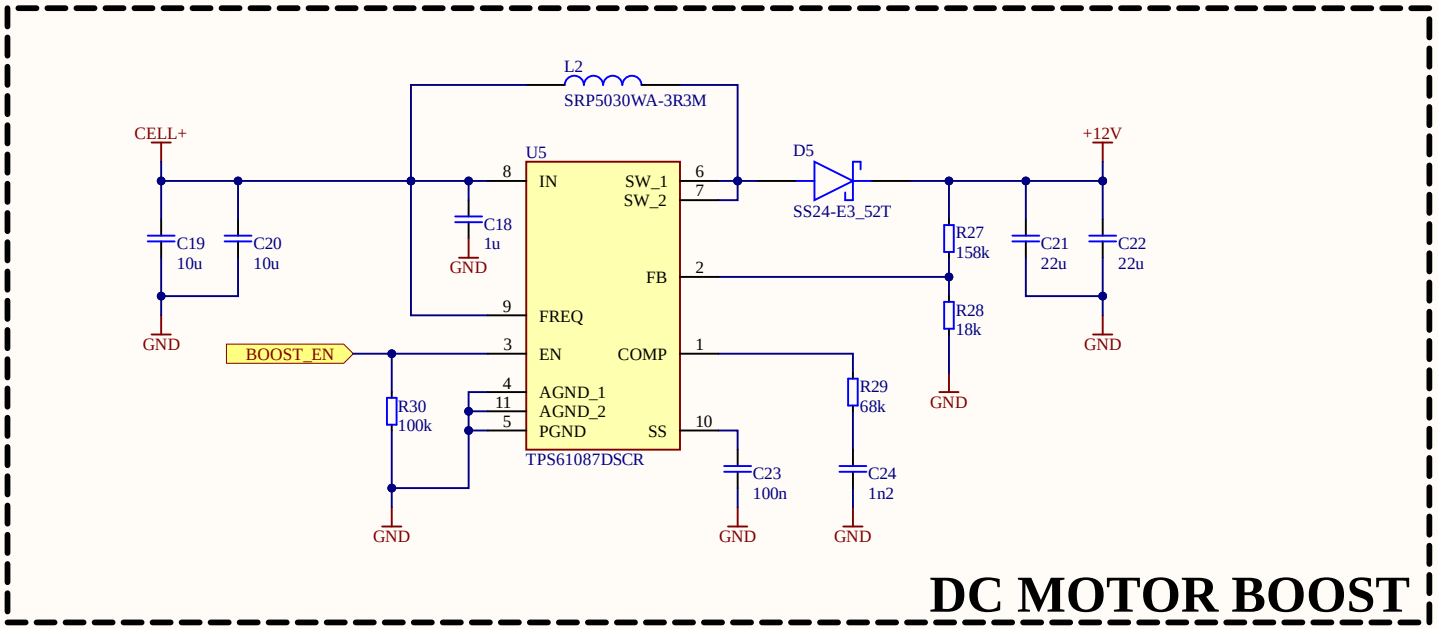


sa we tend to use electromagnetic clutch we need potentially use another 12V boost if the current supply isnt enough

Title		
Size: A4	Number	Revision
Date: 11.09.2026		Sheet of
File: C:_Proj\..\POWER_SUPPLY.SchDoc		Drawn By:

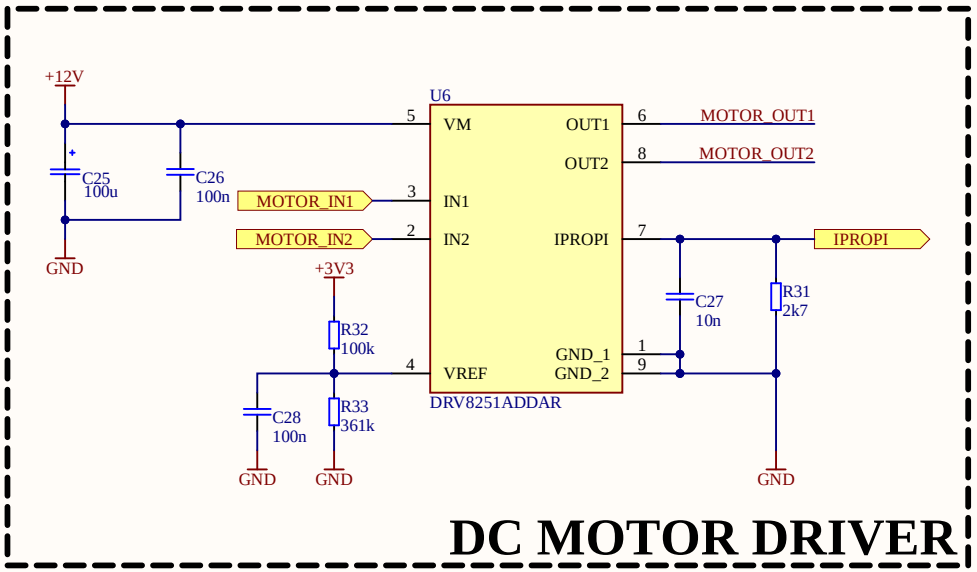

DC MOTOR DRIVER


maybe use BOOST_EN to power the VREF divider

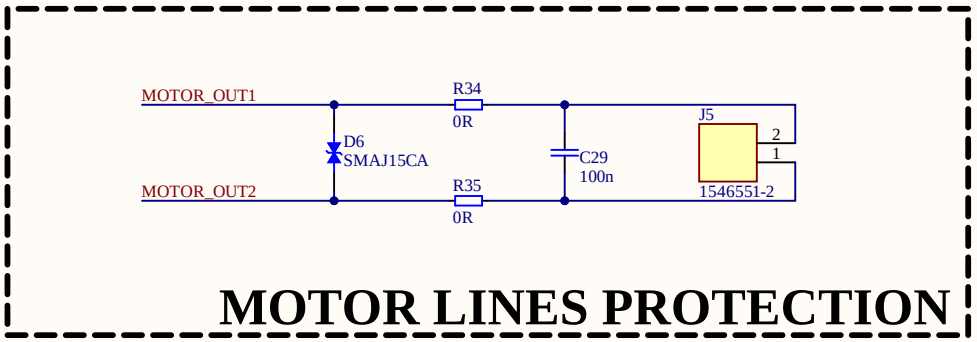


MOTOR LINES PROTECTION

consider building pi filter by placing ferrite beads instead of 0R

Title		
Size: A4	Number	Revision
Date: 11.09.2026		Sheet of
File: C:_Proj\..\MOTOR_DRIVER.SchDoc		Drawn By:

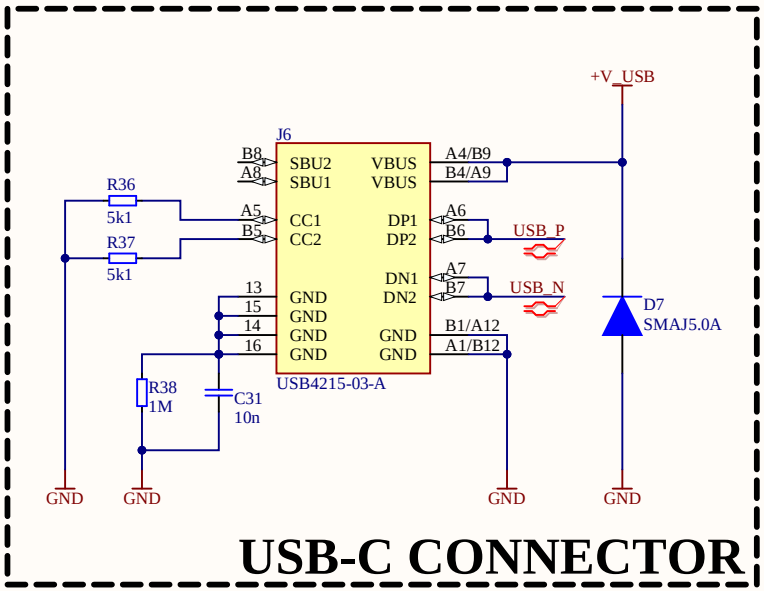


USB-C CONNECTOR

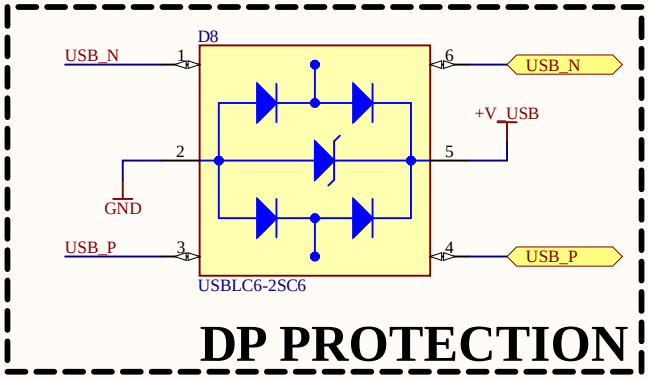

DP PROTECTION

Title		
Size A4	Number	Revision
Date: 11.09.2026		Sheet of
File: C:_Proj\..\USBC_CONNECTOR.SchDoc		Drawn By:

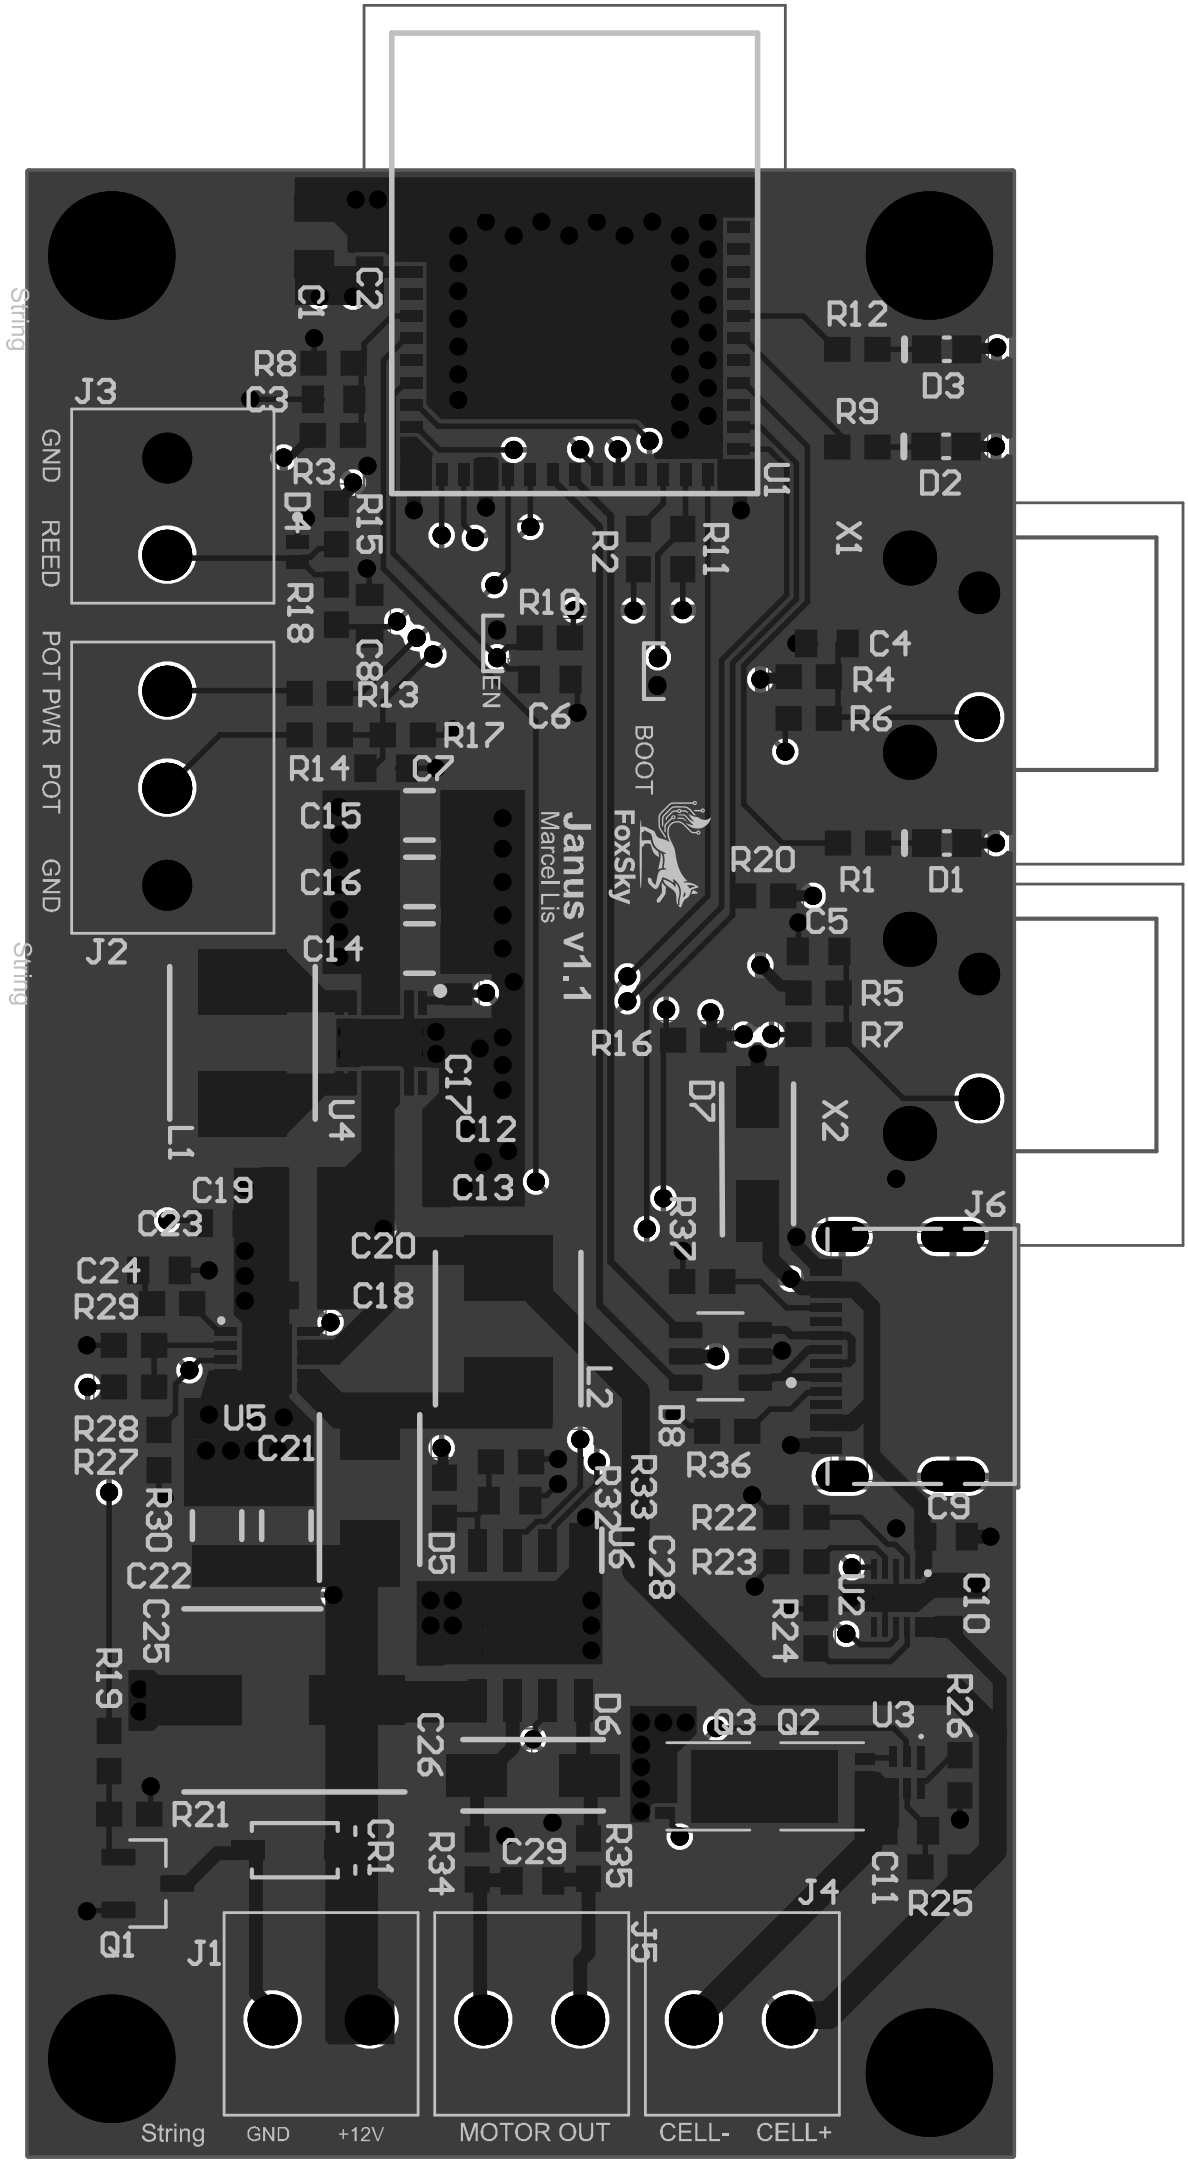
String
J3
GND
REED
POT PWR
POT
GND
J2
String
Janus v1.1
Marcel Lis
FoxSky
BOOT
EN
U1
X1
X2
J6
J1
J4
J5
String
GND
+12V
MOTOR OUT
CELL-
CELL+
String
String

Board Stack Report