




Title			
Size A4	Number		Revision
Date:	11.08.2026	Sheet of	
File:	C:_Proj\..\FoxSky.Janus.SchDoc	Drawn By:	

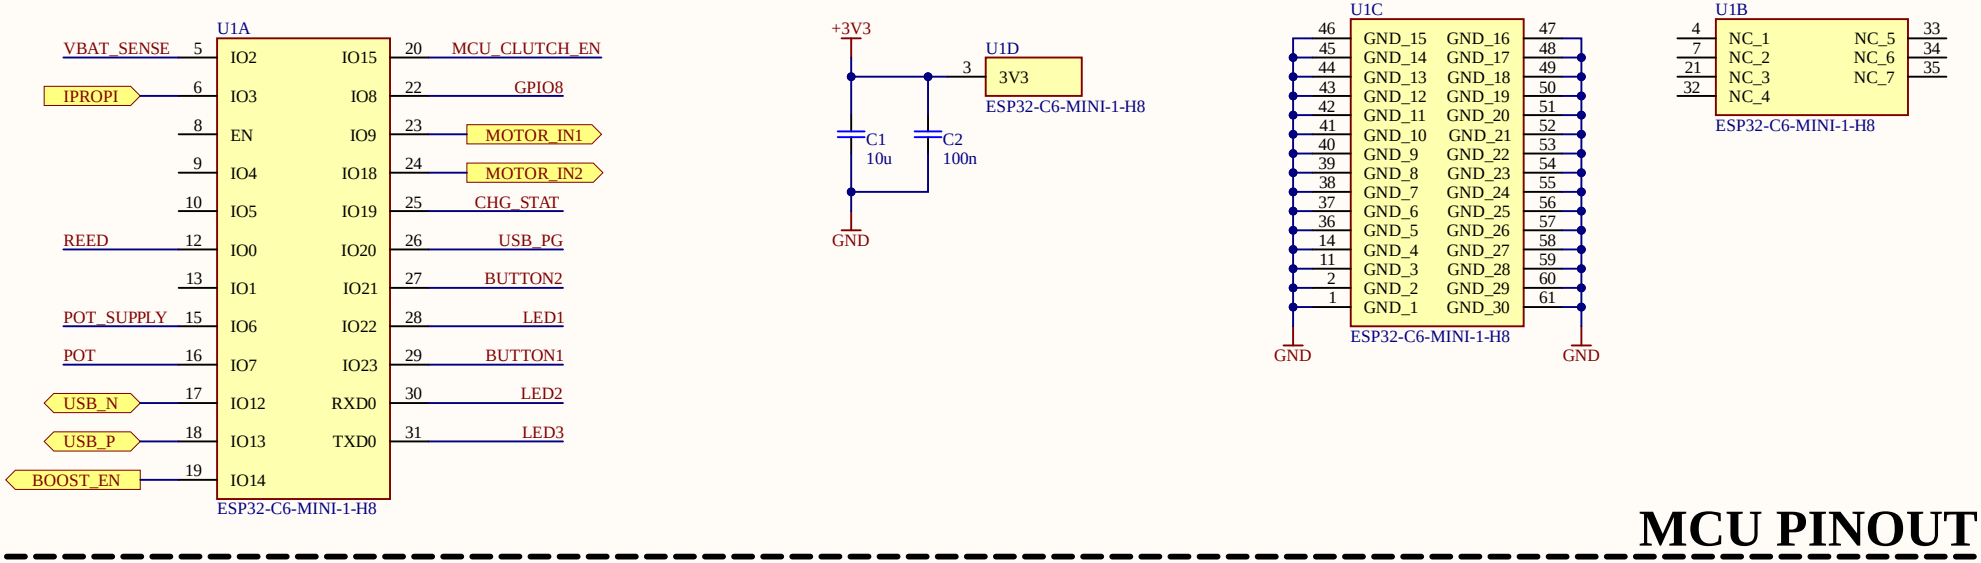

MCU PINOUT

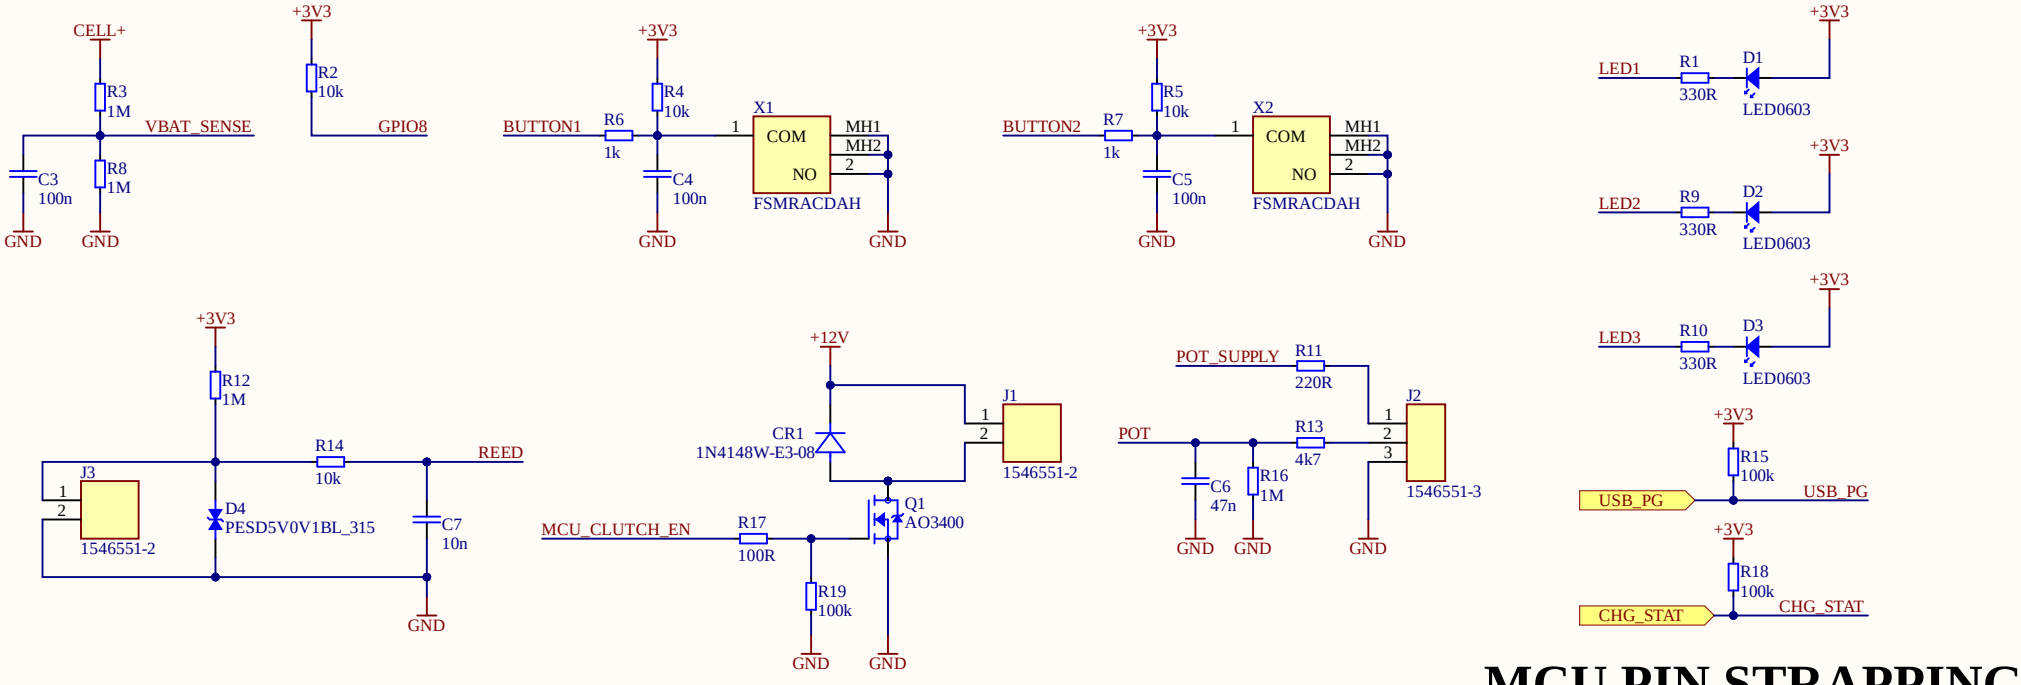


MCU PIN STRAPPING

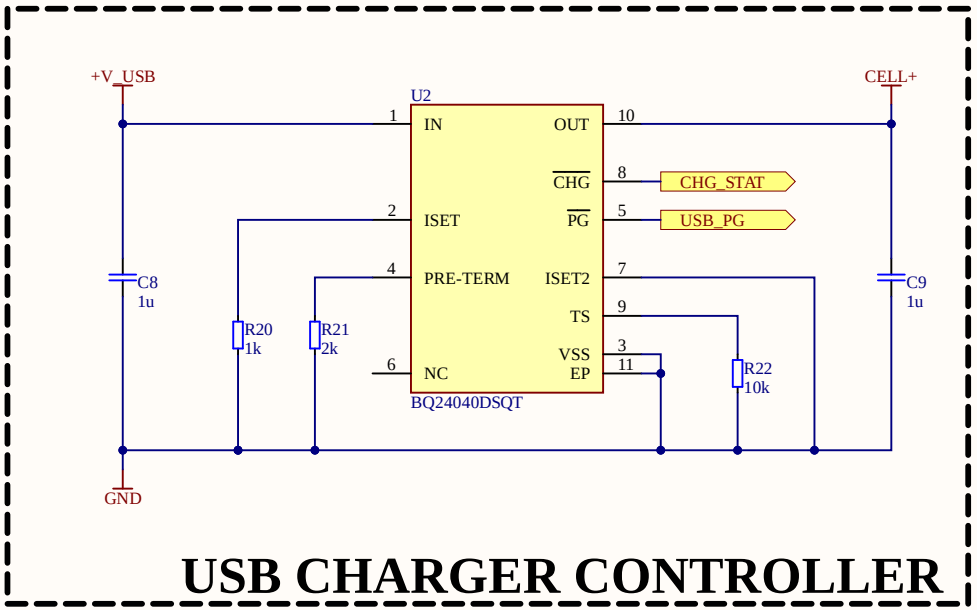


USB CHARGER CONTROLLER


place charging indicating diodes and maybe termistor (103AT) to TS, for now only 10k will replace it

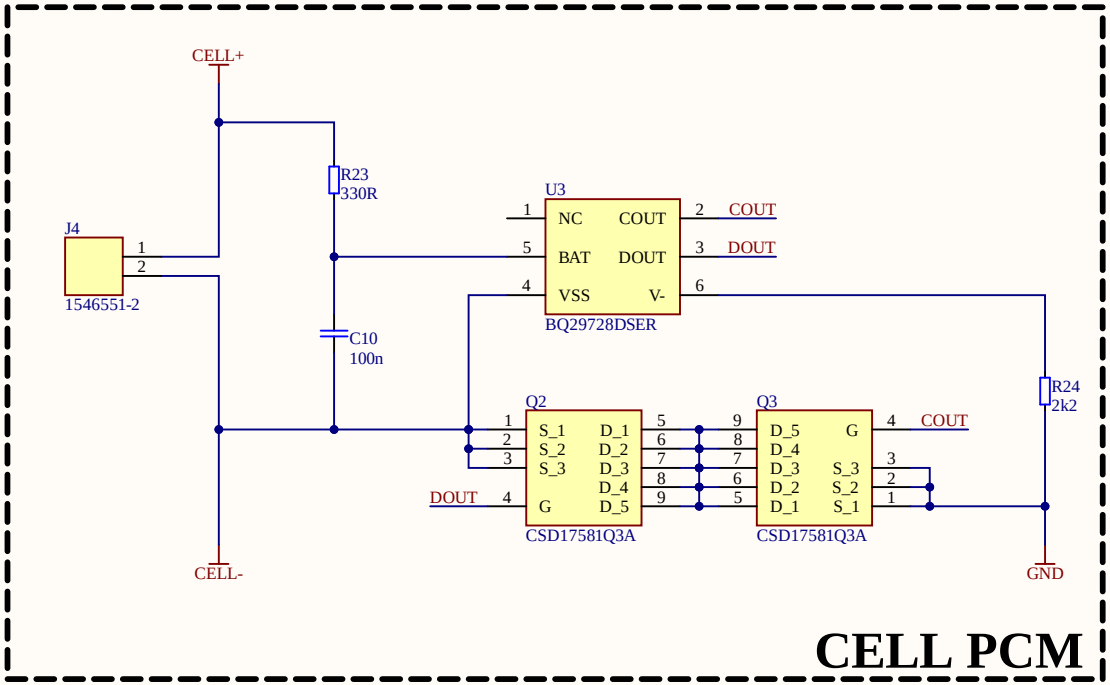

CELL PCM


Title		
Size A4	Number	Revision
Date: 11.08.2026	Sheet of	
File: C:_Proj\..\POWER_CELL_PROTECTION_AND_CHARGING.SchDoc	Drawn By:	

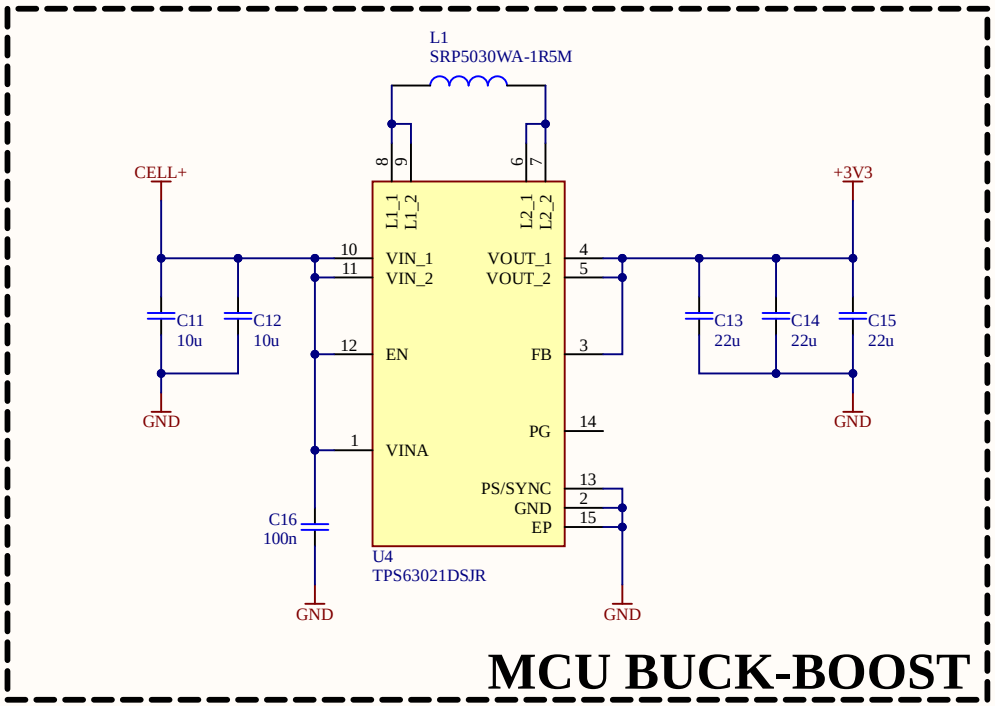

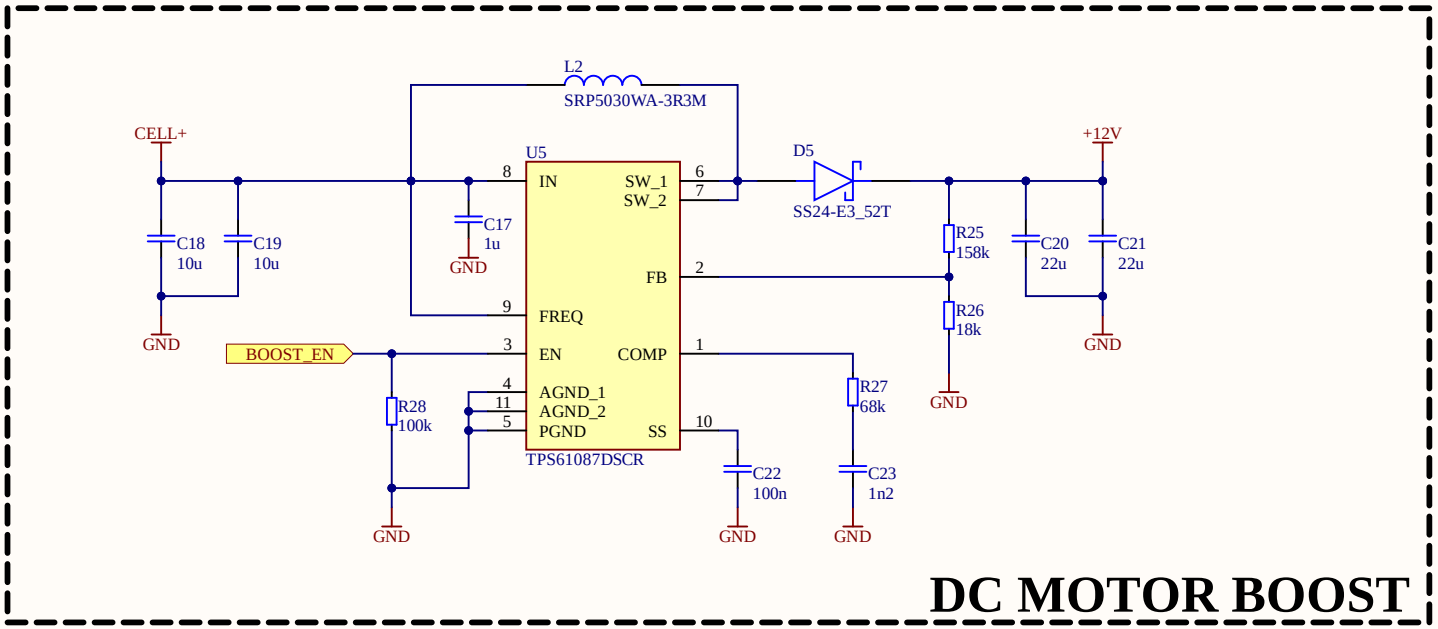


sa we tend to use electromagnetic clutch we need potentially use another 12V boost if the current supply isnt enough

Title		
Size: A4	Number	Revision
Date: 11.08.2026		Sheet of
File: C:_Proj\..\POWER_SUPPLY.SchDoc		Drawn By:

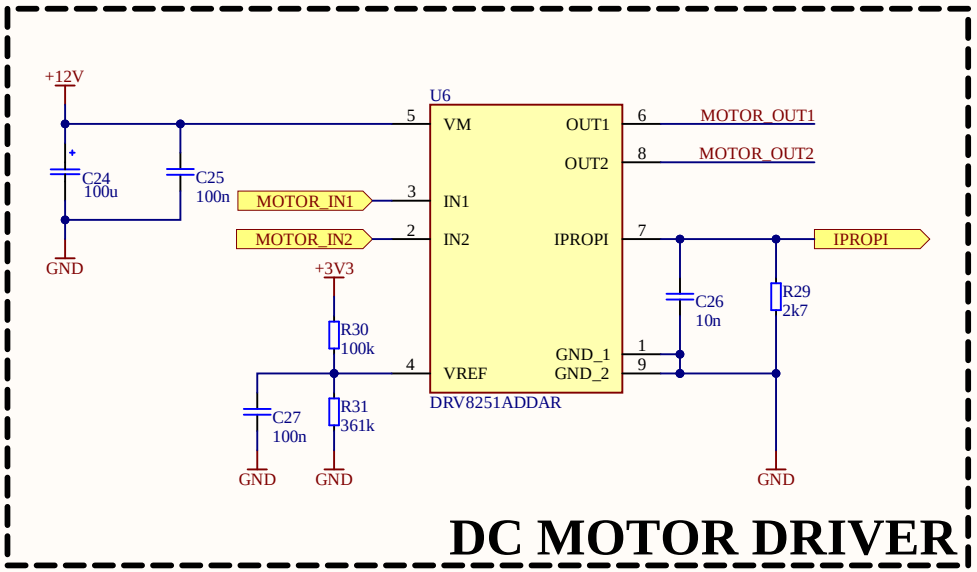

DC MOTOR DRIVER


maybe use BOOST_EN to power the VREF divider

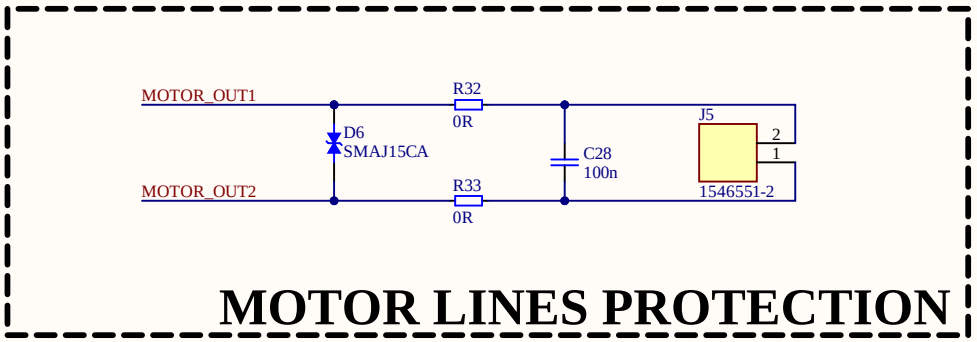


MOTOR LINES PROTECTION

consider building pi filter by placing ferrite beads instead of 0R

Title		
Size: A4	Number	Revision
Date: 11.08.2026		Sheet of
File: C:_Proj\..\MOTOR_DRIVER.SchDoc		Drawn By:

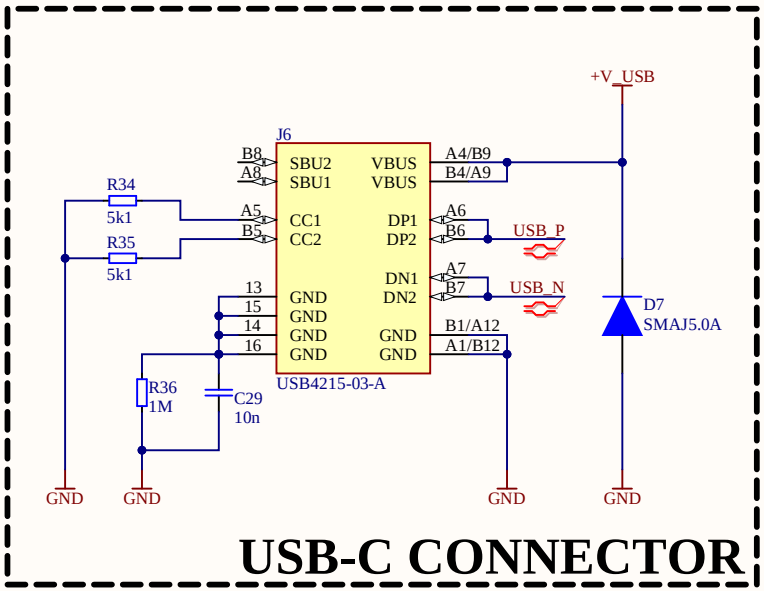


USB-C CONNECTOR

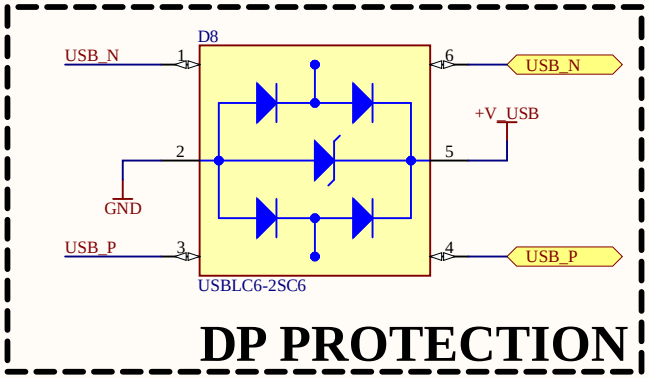

DP PROTECTION

Title		
Size A4	Number	Revision
Date: 11.08.2026		Sheet of
File: C:_Proj\..\USBC_CONNECTOR.SchDoc		Drawn By:

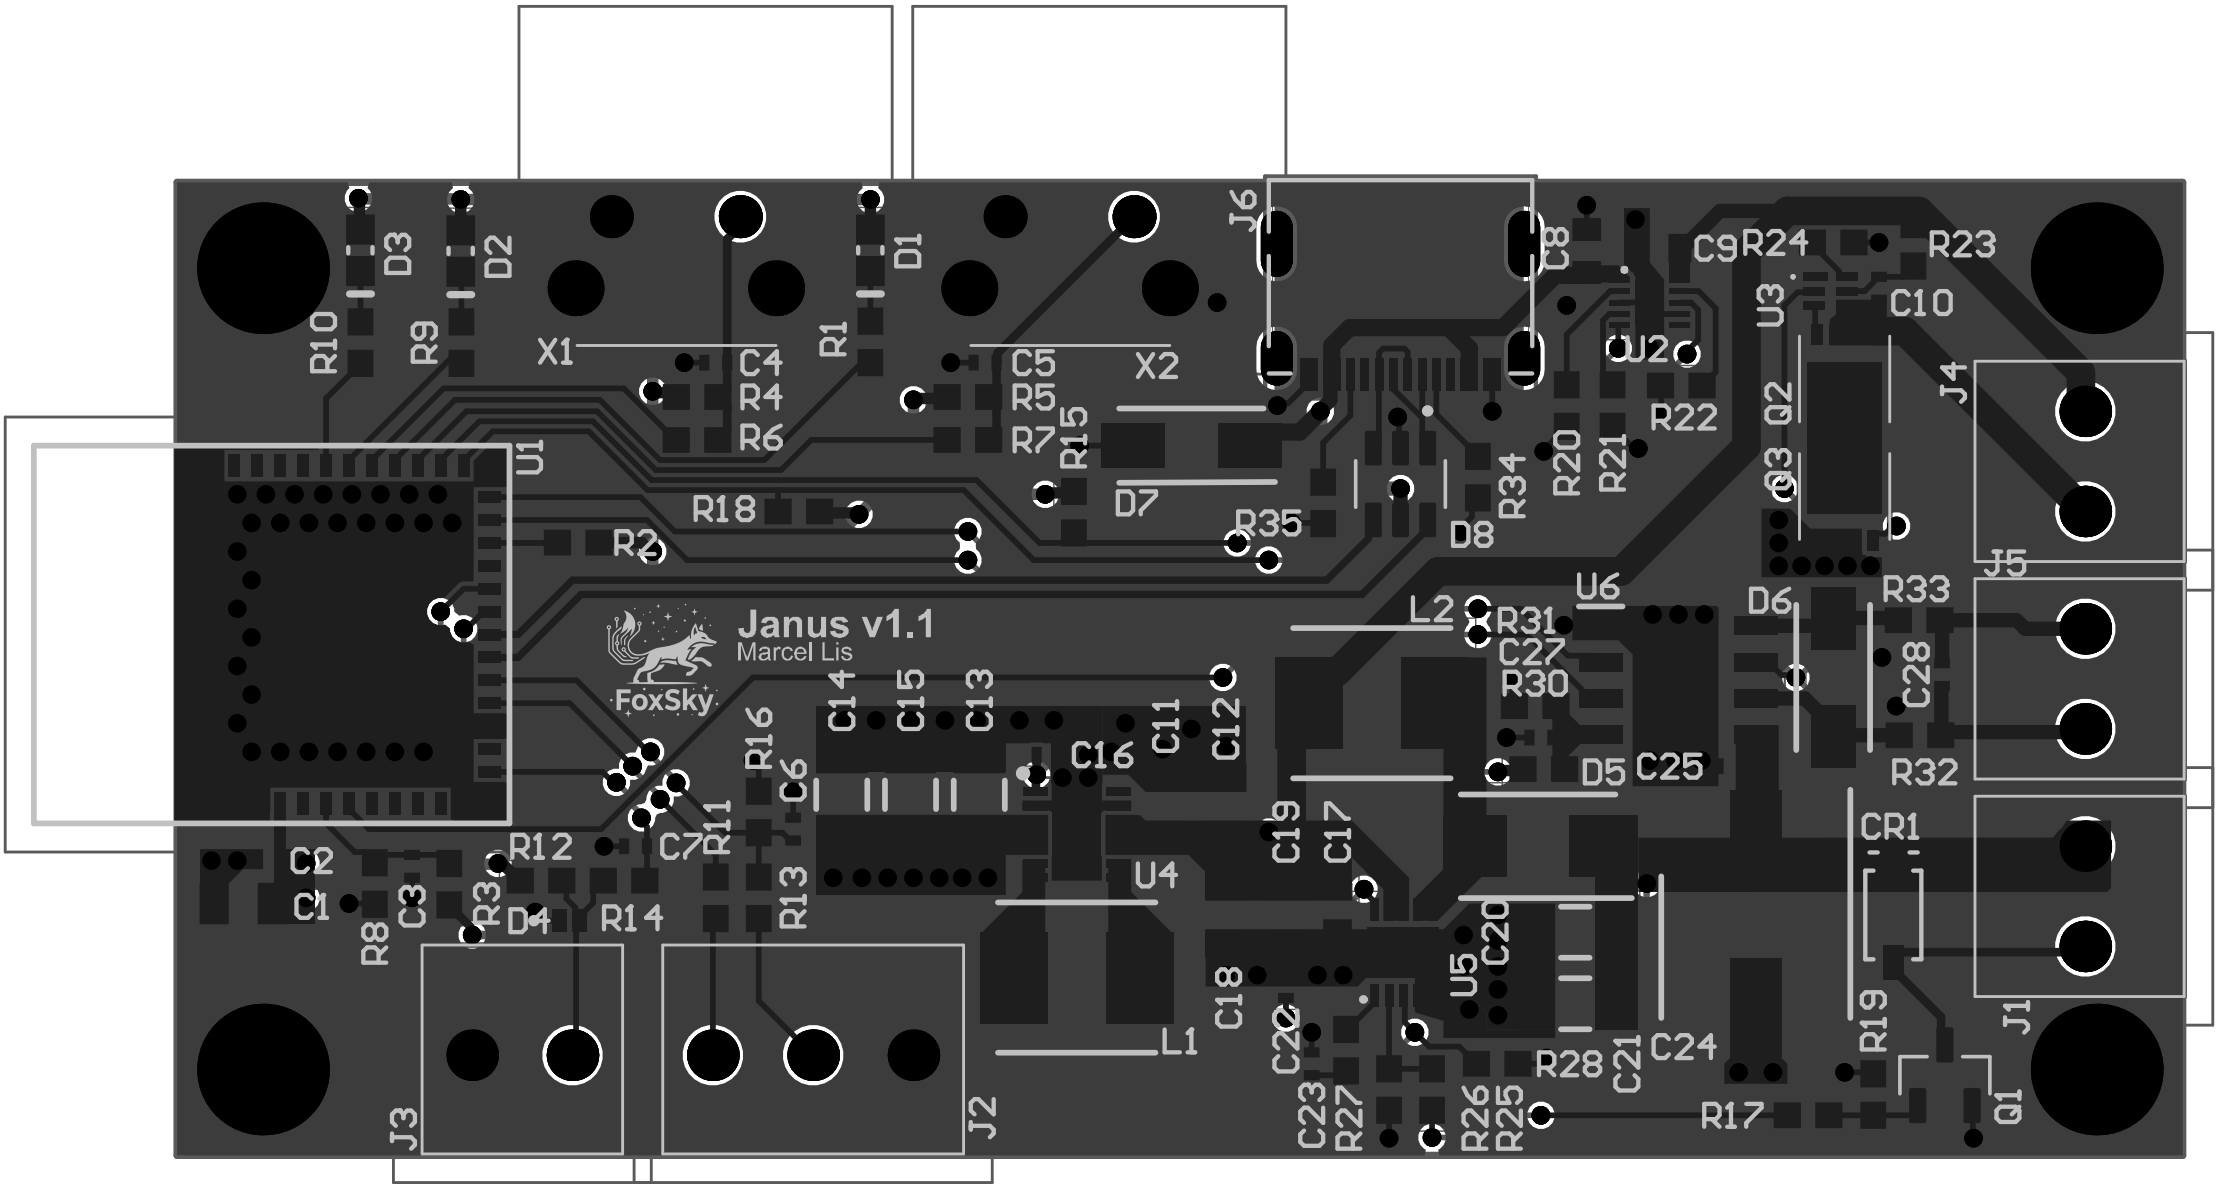
Janus v1.1
Marcel Lis
FoxSky
U1
X1
X2
J1
J2
J3
J4
J5
J6
U2
U3
U4
U5
U6
L1
L2
Q1
Q2
Q3
CR1
D1
D2
D3
D4
D5
D6
D7
D8
C1
C2
C3
C4
C5
C6
C7
C8
C9
C10
C11
C12
C13
C14
C15
C16
C17
C18
C19
C20
C21
C22
C23
C24
C25
C27
C28
R1
R2
R3
R4
R5
R6
R7
R8
R9
R10
R11
R12
R13
R14
R15
R16
R17
R18
R19
R20
R21
R22
R23
R24
R25
R26
R27
R28
R30
R31
R32
R33
R34
R35

Board Stack Report