

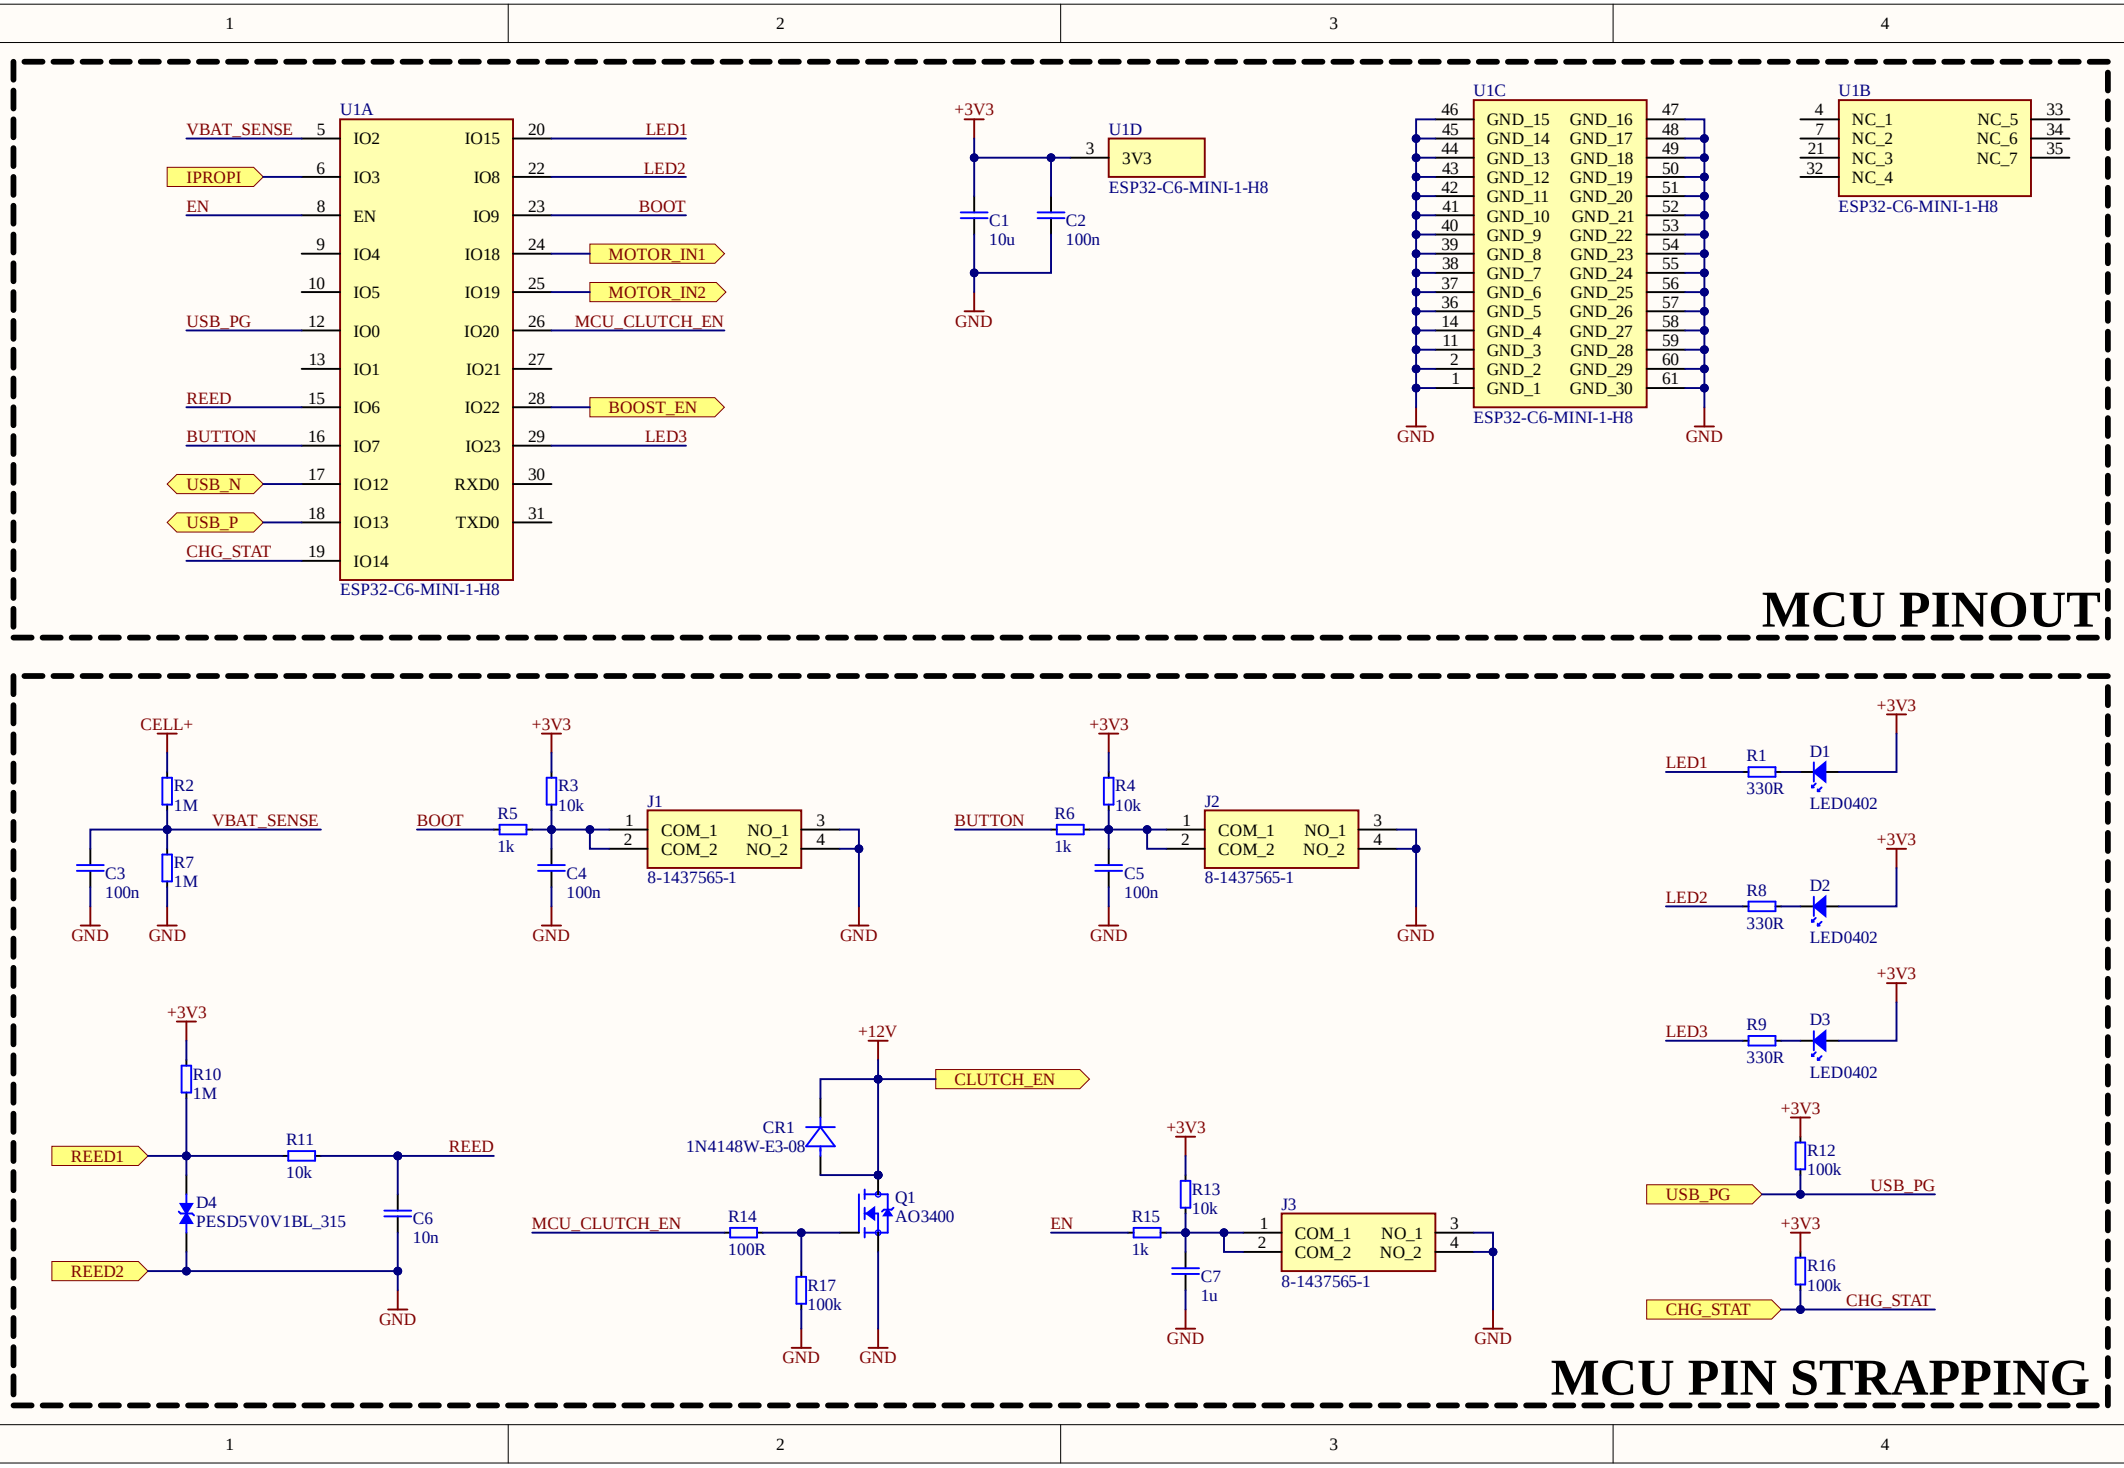


Title			
Size A4	Number		Revision
Date:	10.30.2026	Sheet of	
File:	C:_Proj\..\FoxSky.Janus.SchDoc	Drawn By:	



U1A
VBAT_SENSE
IPROPI
EN
USB_PG
REED
BUTTON
USB_N
USB_P
CHG_STAT
IO2
IO3
IO8
IO9
IO4
IO18
IO5
IO19
IO0
IO20
IO1
IO21
IO6
IO22
IO7
IO23
IO12
RXD0
IO13
TXD0
IO14
LED1
LED2
BOOT
MOTOR_IN1
MOTOR_IN2
MCU_CLUTCH_EN
BOOST_EN
LED3
ESP32-C6-MINI-1-H8
+3V3
U1D
3V3
C1
10u
C2
100n
GND
U1C
GND_15 GND_16
GND_14 GND_17
GND_13 GND_18
GND_12 GND_19
GND_11 GND_20
GND_10 GND_21
GND_9 GND_22
GND_8 GND_23
GND_7 GND_24
GND_6 GND_25
GND_5 GND_26
GND_4 GND_27
GND_3 GND_28
GND_2 GND_29
GND_1 GND_30
U1B
NC_1 NC_5
NC_2 NC_6
NC_3 NC_7
NC_4
MCU PINOUT
CELL+
R2
1M
VBAT_SENSE
C3
100n
R7
1M
R3
10k
BOOT
R5
1k
J1
COM_1 NO_1
COM_2 NO_2
8-1437565-1
C4
100n
R4
10k
BUTTON
R6
1k
J2
C5
100n
LED1
R1
330R
D1
LED0402
LED2
R8
D2
LED3
R9
D3
R10
1M
REED1
R11
10k
REED
D4
PESD5V0V1BL_315
REED2
C6
10n
+12V
CLUTCH_EN
CR1
1N4148W-E3-08
MCU_CLUTCH_EN
R14
100R
Q1
AO3400
R17
100k
EN
R15
1k
R13
10k
J3
C7
1u
R12
100k
USB_PG
R16
100k
CHG_STAT
MCU PIN STRAPPING

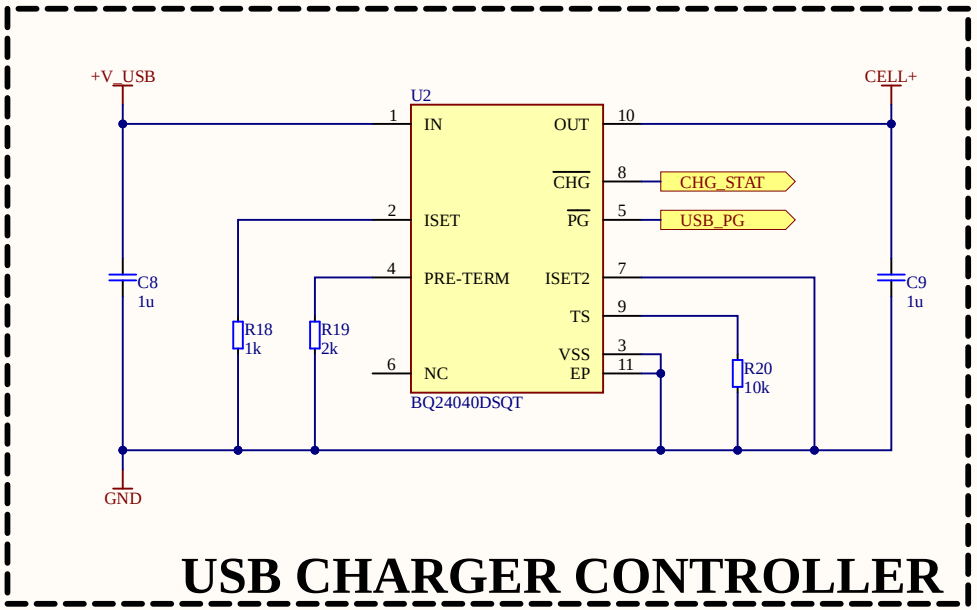


place charging indicating diodes and maybe termistor (103AT) to TS, for now only 10k will replace it

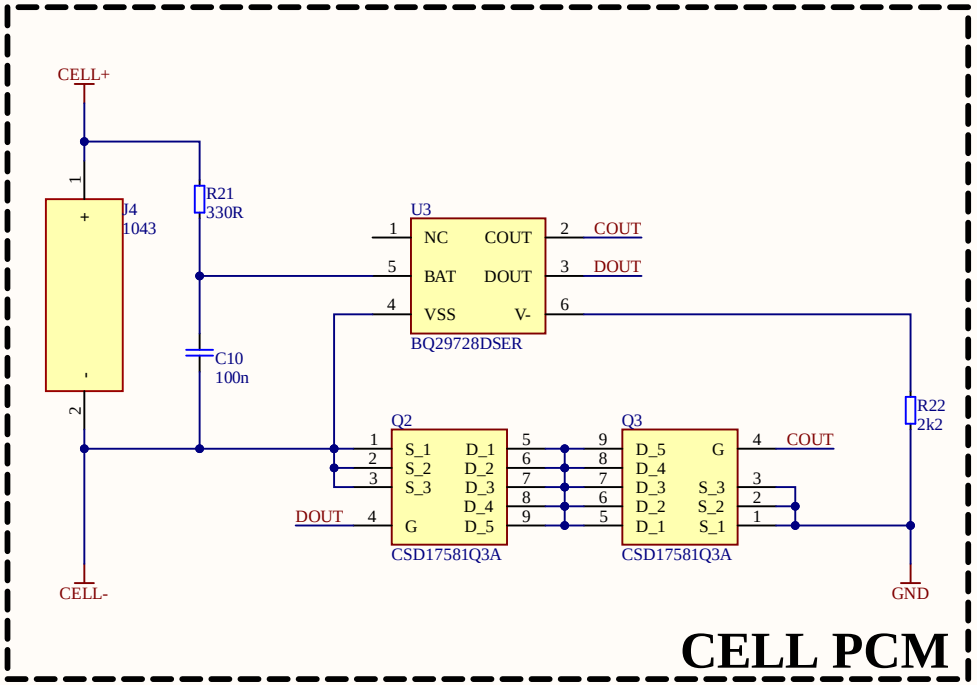


Title		
Size A4	Number	Revision
Date: 10.30.2026		Sheet of
File: C:_Proj\..\POWER_CELL_PROTECTION_AND_CHARGING.SchDoc		Drawn By:

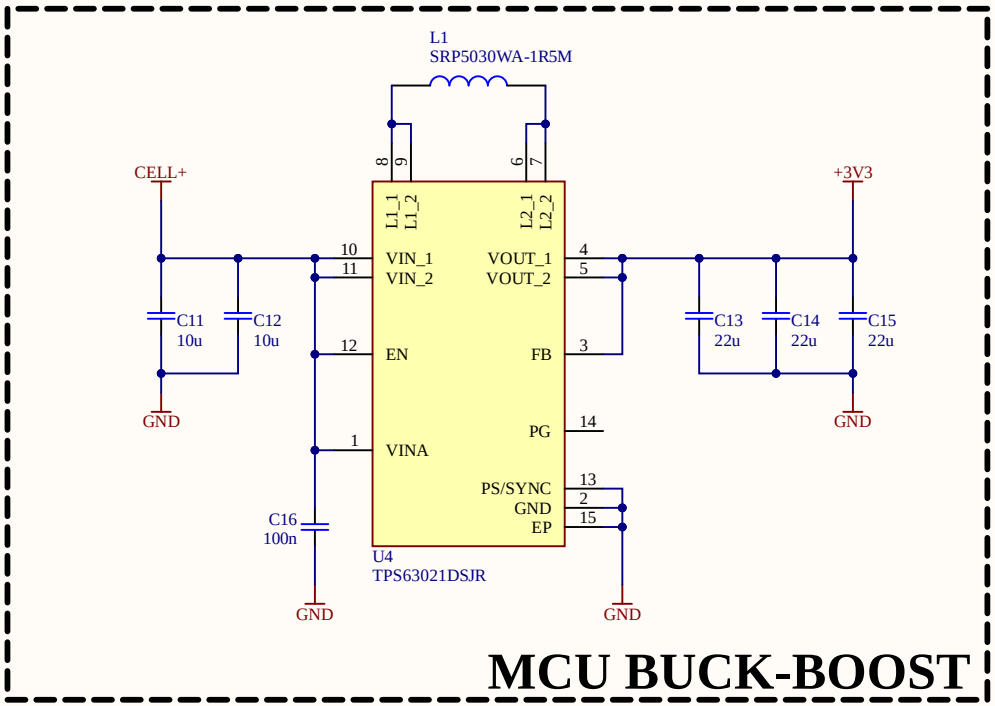

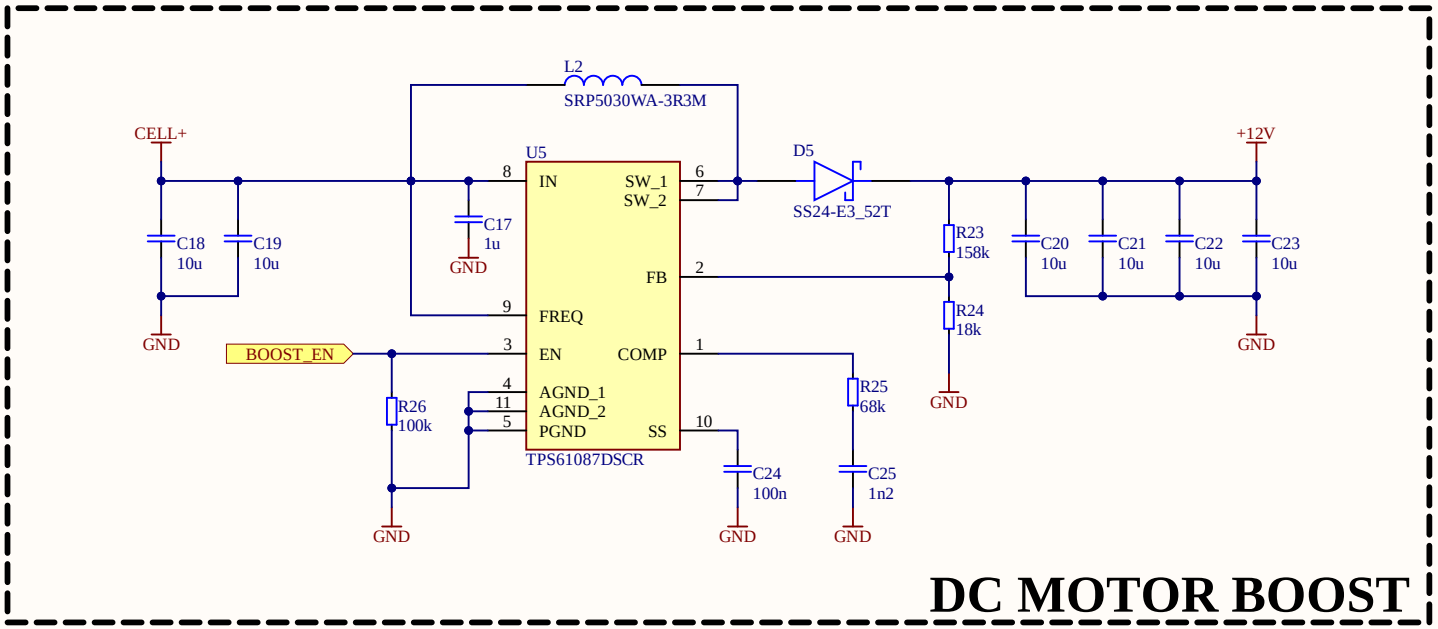


sa we tend to use electromagnetic clutch we need potentially use another 12V boost if the current supply isnt enough

Title		
Size: A4	Number	Revision
Date: 10.30.2026		Sheet of
File: C:_Proj\..\POWER_SUPPLY.SchDoc		Drawn By:

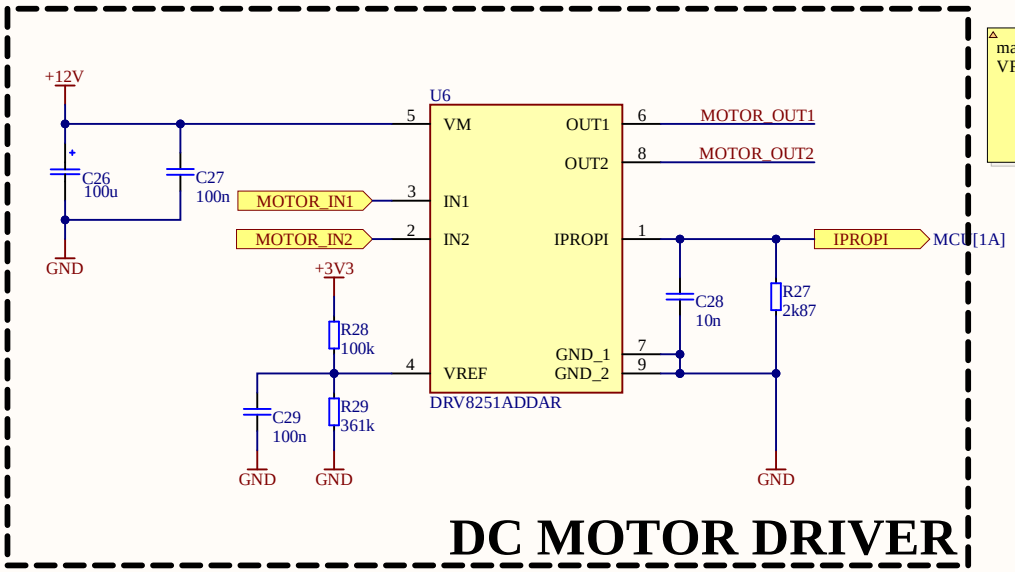

DC MOTOR DRIVER


maybe use BOOST_EN to power the VREF divider

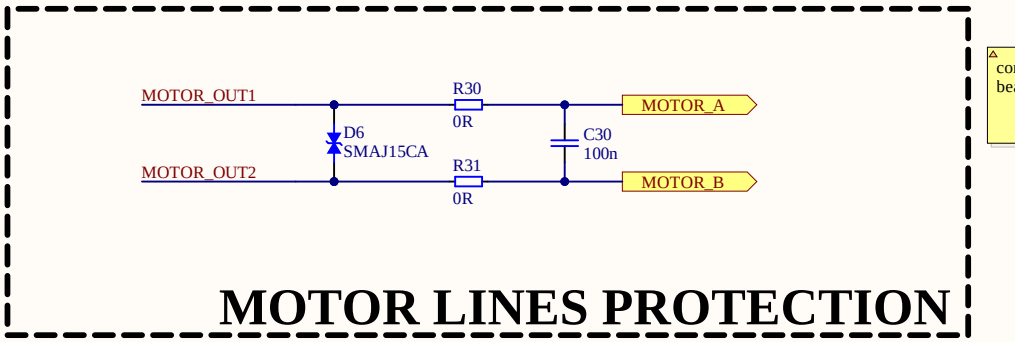


MOTOR LINES PROTECTION

consider building pi filter by placing ferrite beads instead of 0R

Title		
Size: A4	Number	Revision
Date: 10.30.2026		Sheet of
File: C:_Proj\..\MOTOR_DRIVER.SchDoc		Drawn By:

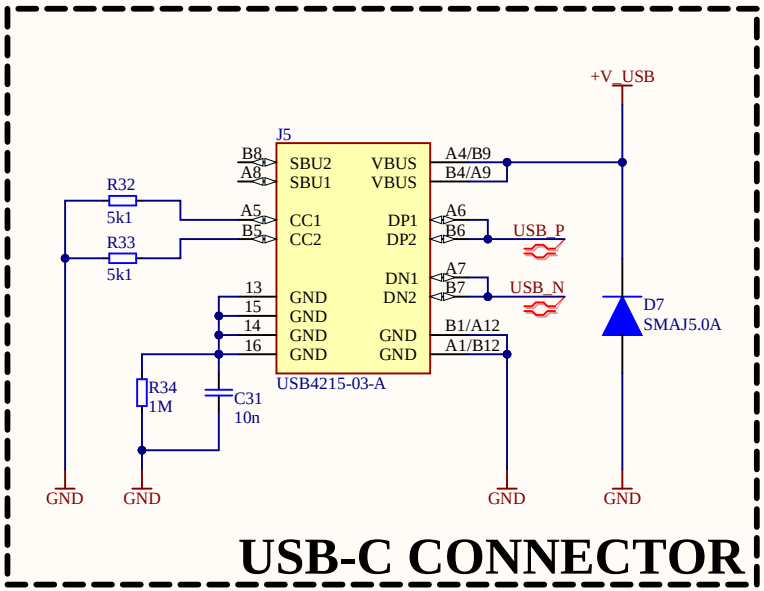

USB-C CONNECTOR

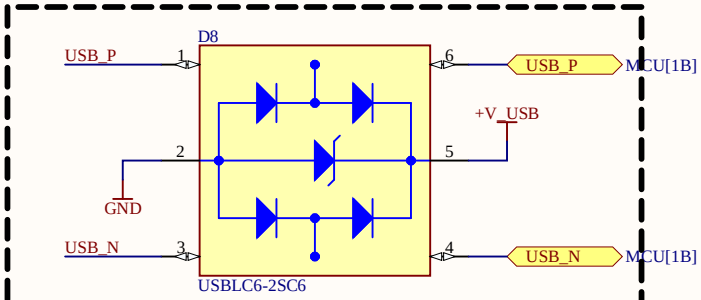

DP PROTECTION

Title		
Size A4	Number	Revision
Date: 10.30.2026		Sheet of
File: C:_Proj\..\USBC_CONNECTOR.SchDoc		Drawn By:

Board Stack Report