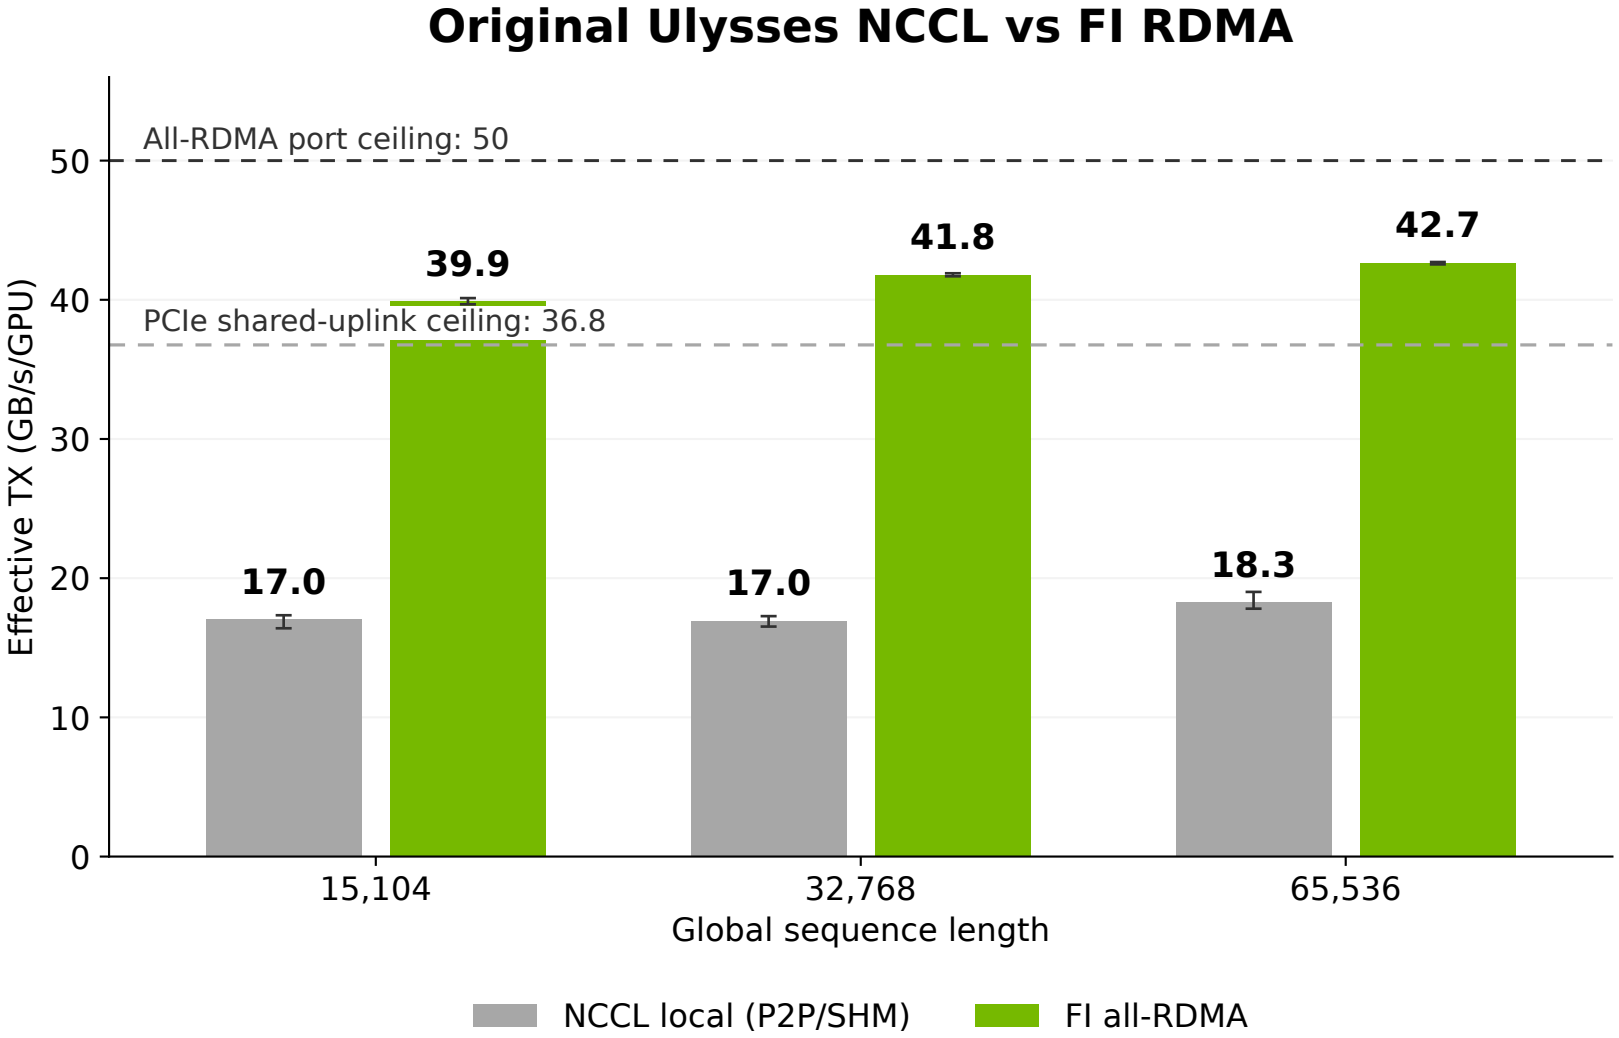
Original Ulysses NCCL vs FI RDMA
All-RDMA port ceiling: 50
PCIe shared-uplink ceiling: 36.8
Effective TX (GB/s/GPU)
0
10
20
30
40
50
17.0
39.9
17.0
41.8
18.3
42.7
15,104
32,768
65,536
Global sequence length
NCCL local (P2P/SHM)
FI all-RDMA
Bars: measured medians · dashed lines: optimistic capacity limits
H56 · D128 · BF16 · Q/K/V/O · layout and synchronization included