

(19) **United States**

(12) **Patent Application Publication**
Stephens

(10) **Pub. No.: US 2021/0147016 A1**

(43) **Pub. Date: May 20, 2021**

(54) **MECHANICALLY-TIMED FOOTSTEPS FOR A ROBOTIC DEVICE**

Publication Classification

(71) Applicant: **Boston Dynamics, Inc.**, Waltham, MA (US)

(51) **Int. Cl.**
B62D 57/032 (2006.01)

(72) Inventor: **Benjamin Stephens**, Somerville, MA (US)

(52) **U.S. Cl.**
CPC **B62D 57/032** (2013.01); **Y10S 901/01** (2013.01)

(73) Assignee: **Boston Dynamics, Inc.**, Waltham, MA (US)

(57) **ABSTRACT**


(21) Appl. No.: **17/158,086**

(22) Filed: **Jan. 26, 2021**

Related U.S. Application Data

(63) Continuation of application No. 16/281,204, filed on Feb. 21, 2019, which is a continuation of application No. 15/331,167, filed on Oct. 21, 2016, now Pat. No. 10,246,151, which is a continuation of application No. 14/585,542, filed on Dec. 30, 2014, now Pat. No. 9,499,218.

An example implementation for determining mechanically-timed footsteps may involve a robot having a first foot in contact with a ground surface and a second foot not in contact with the ground surface. The robot may determine a position of its center of mass and center of mass velocity, and based on these, determine a capture point for the robot. The robot may also determine a threshold position for the capture point, where the threshold position is based on a target trajectory for the capture point after the second foot contacts the ground surface. The robot may determine that the capture point has reached this threshold position and based on this determination, and cause the second foot to contact the ground surface.

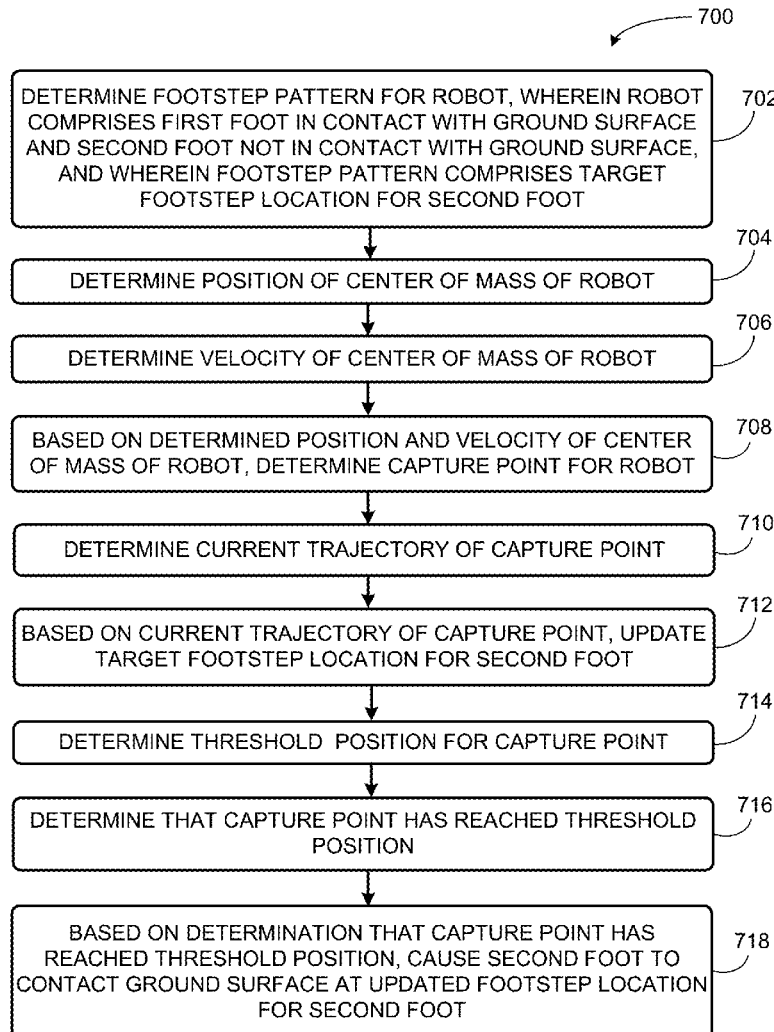

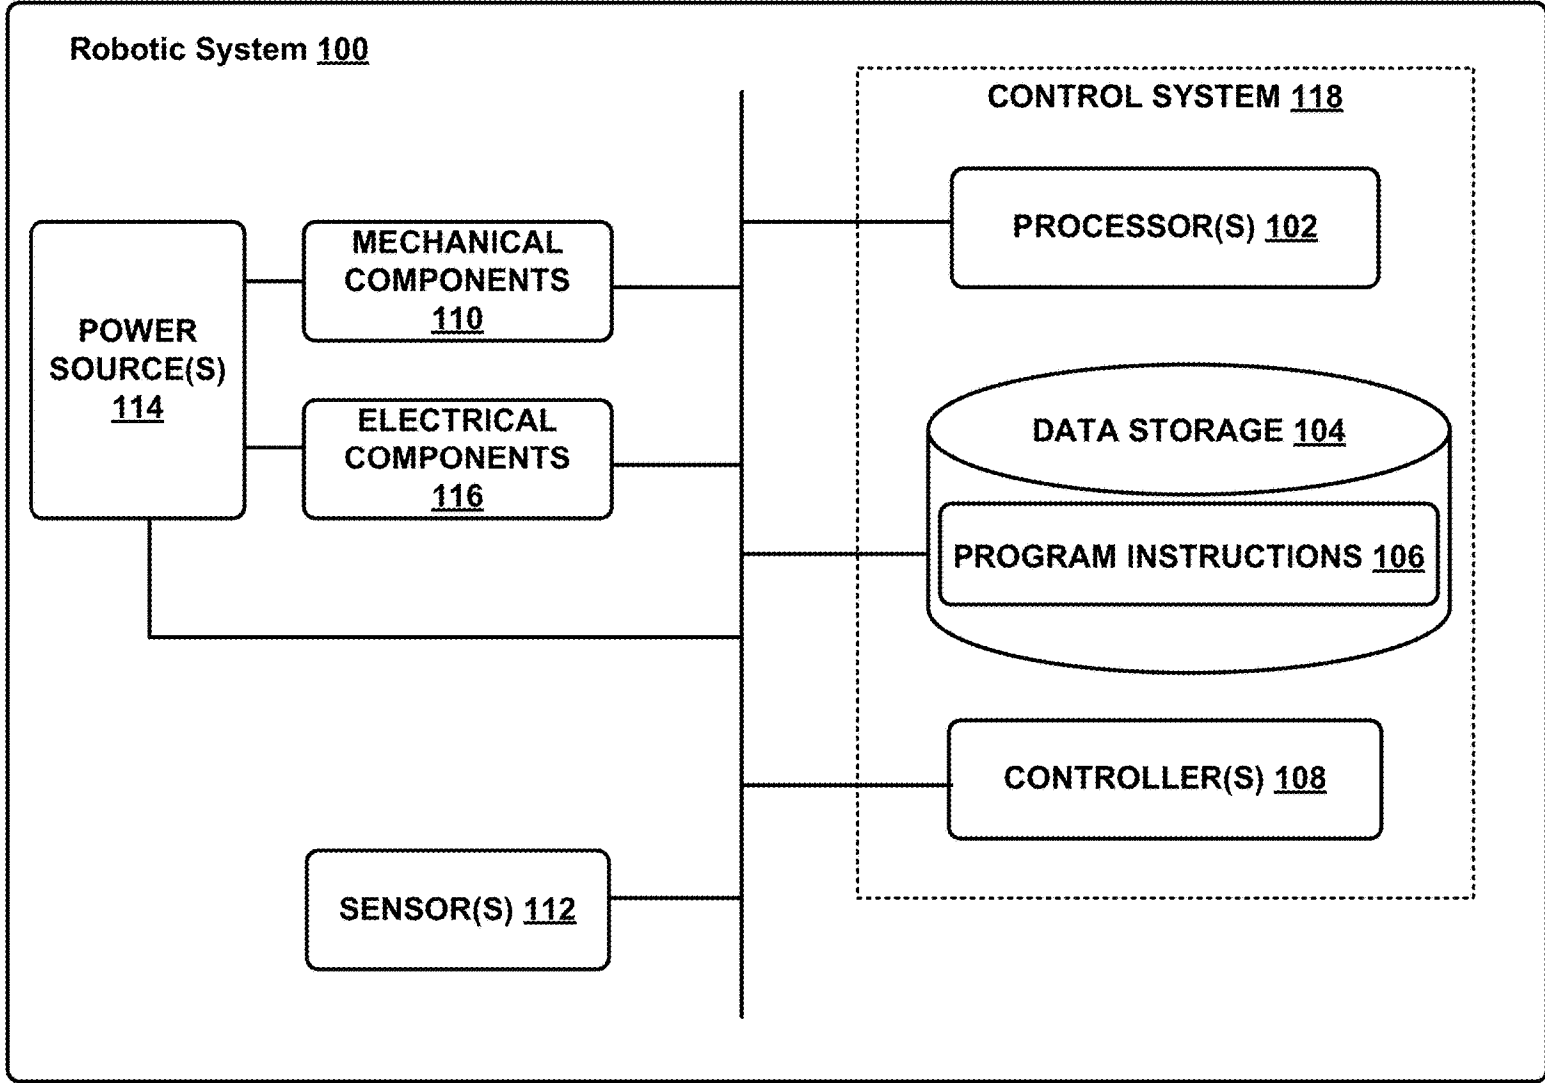


Fig. 1

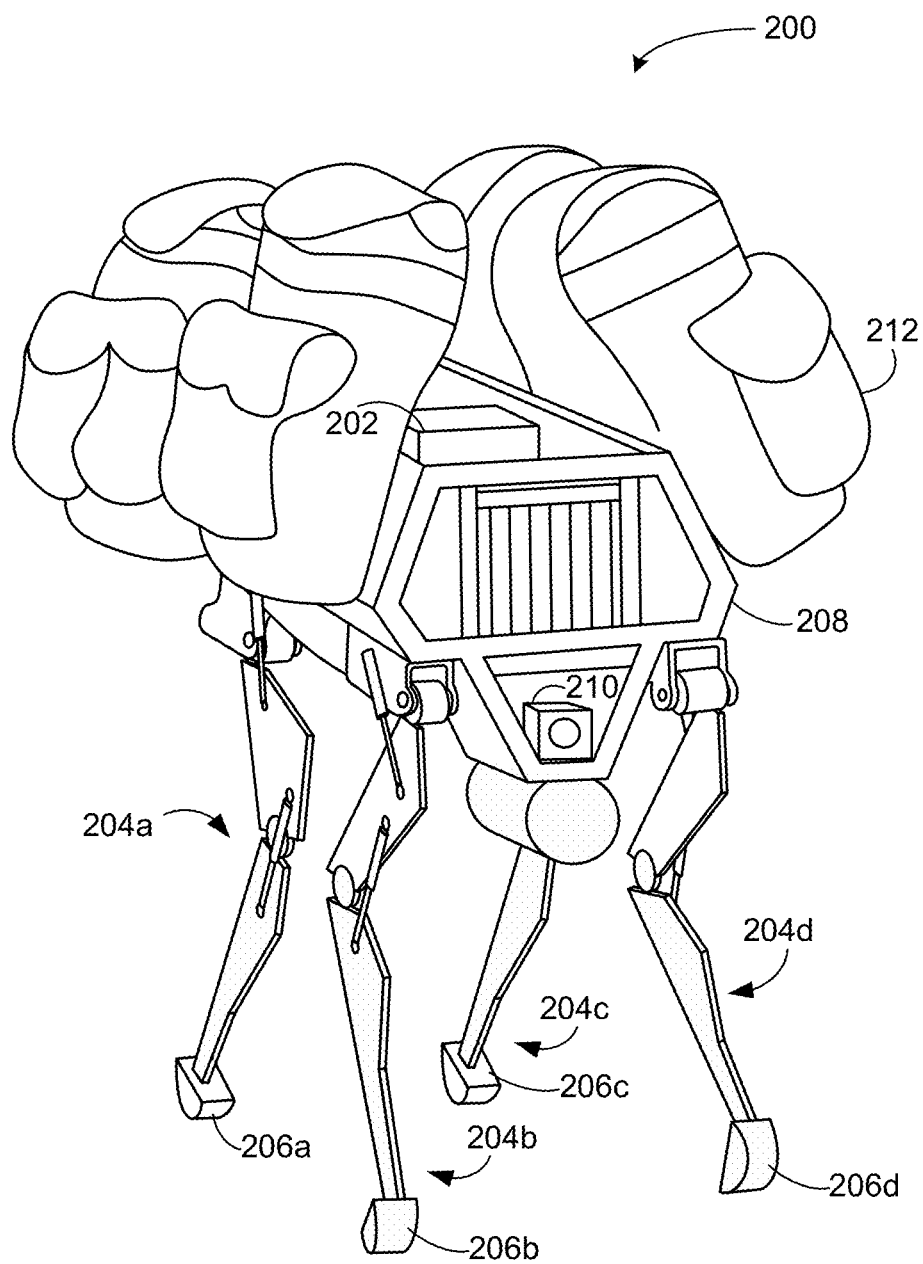


Fig. 2

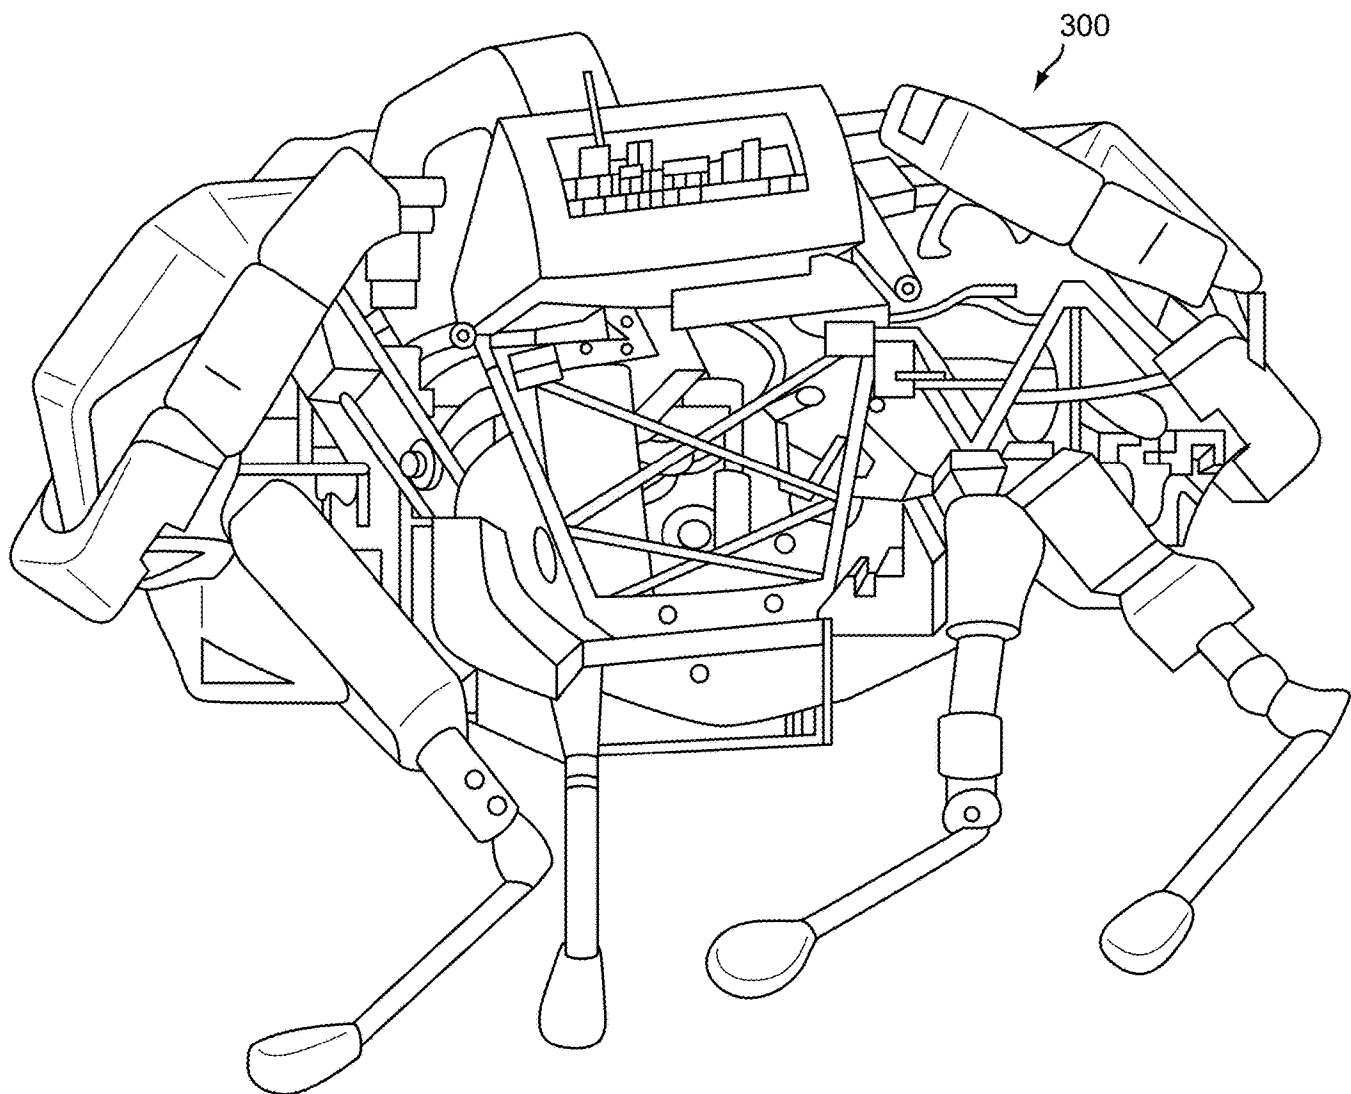


Fig. 3

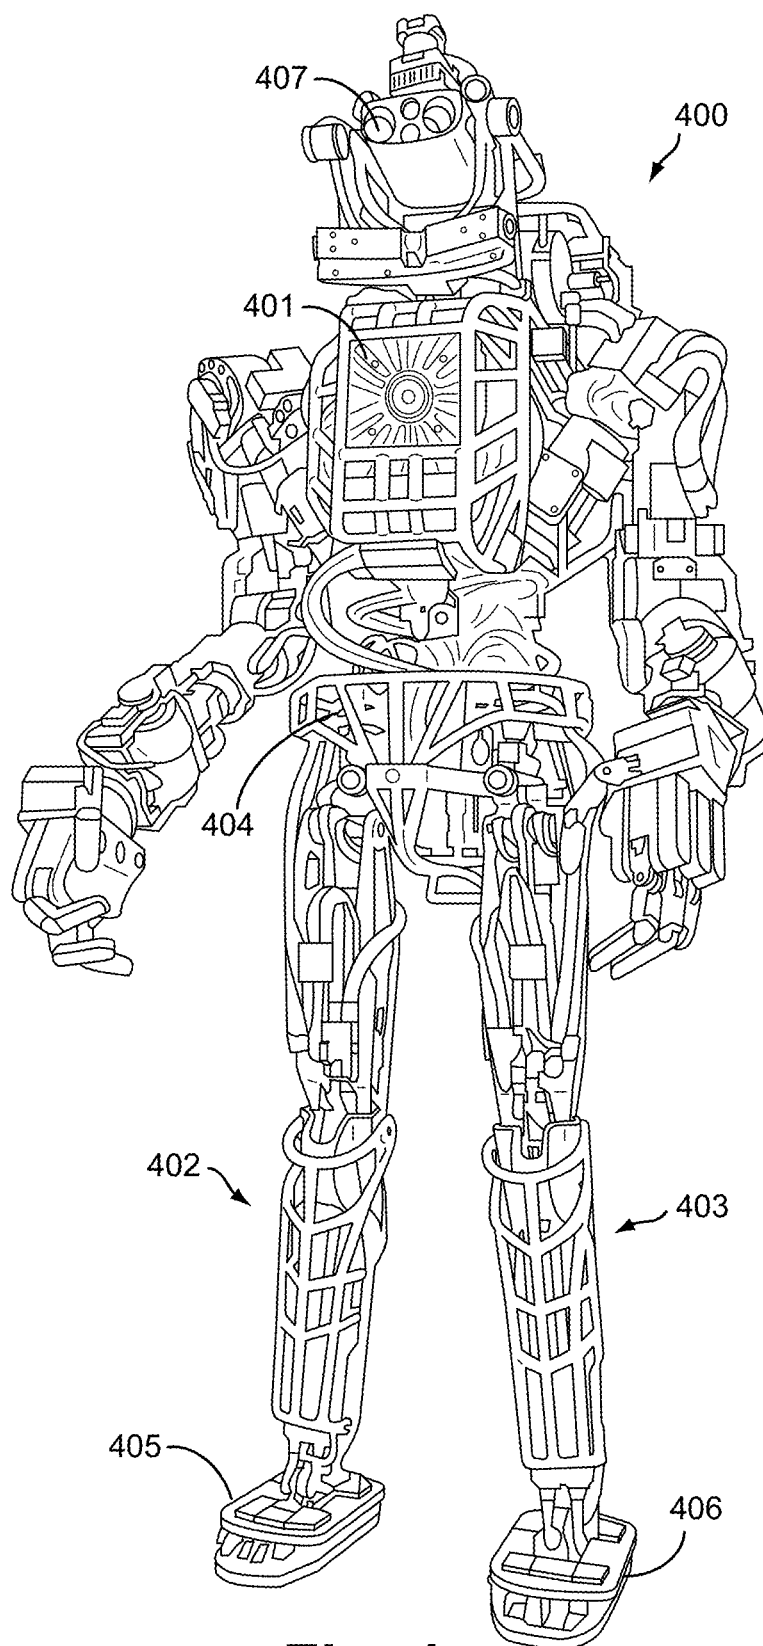


Fig. 4

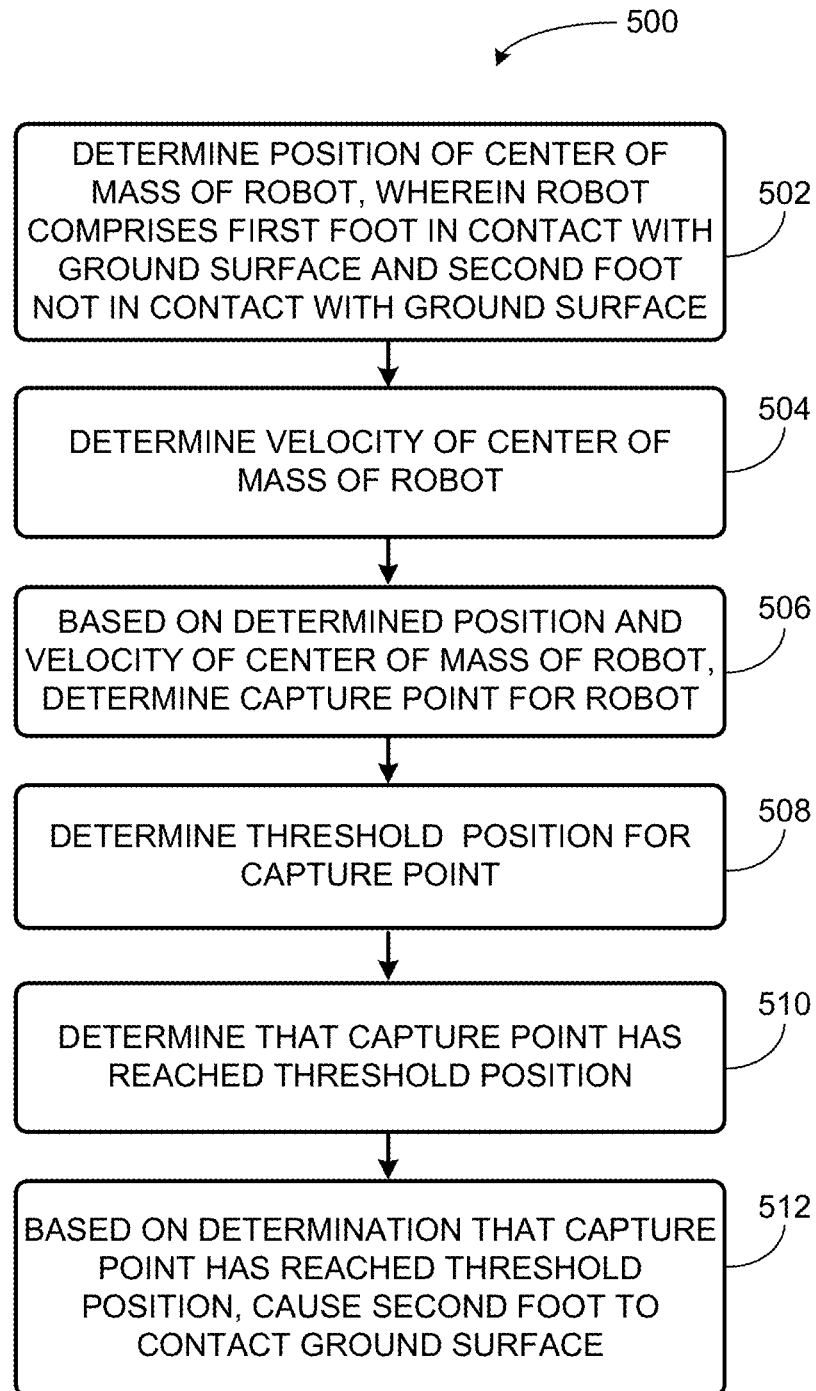
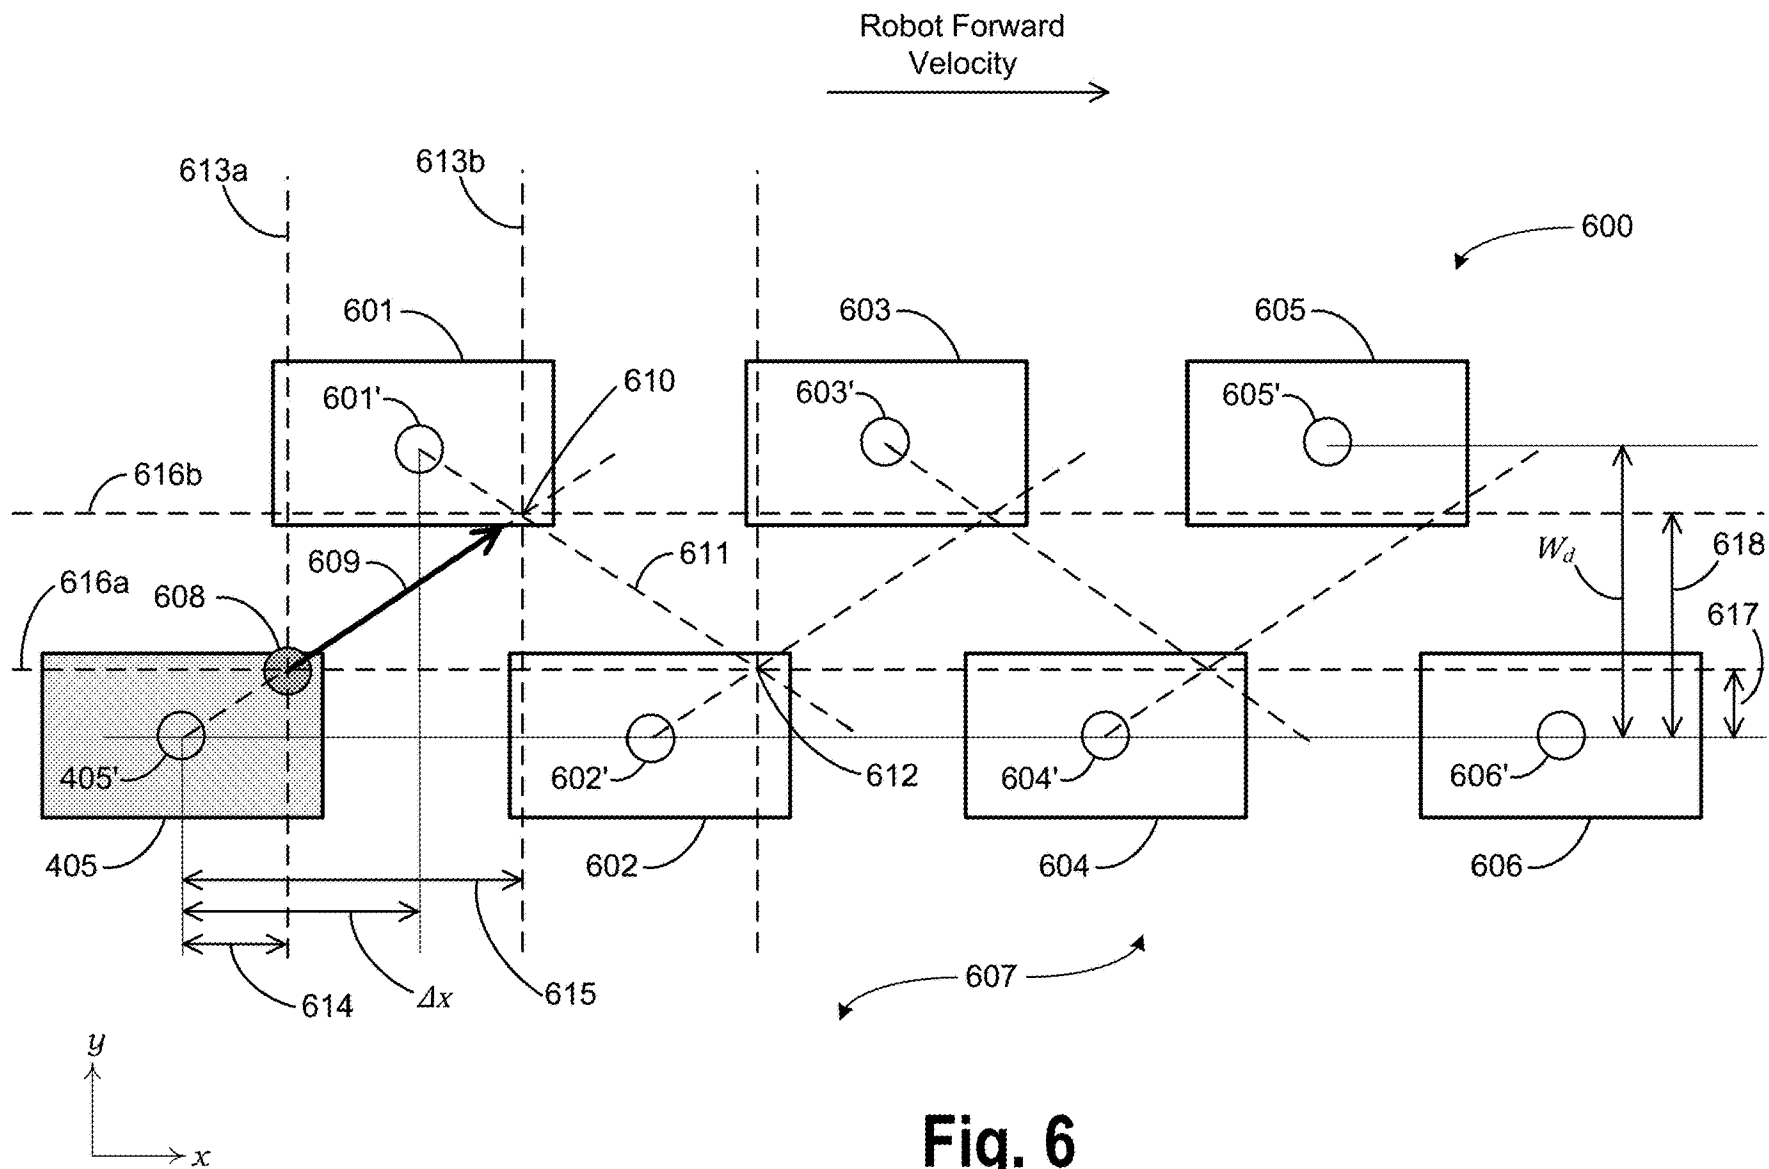
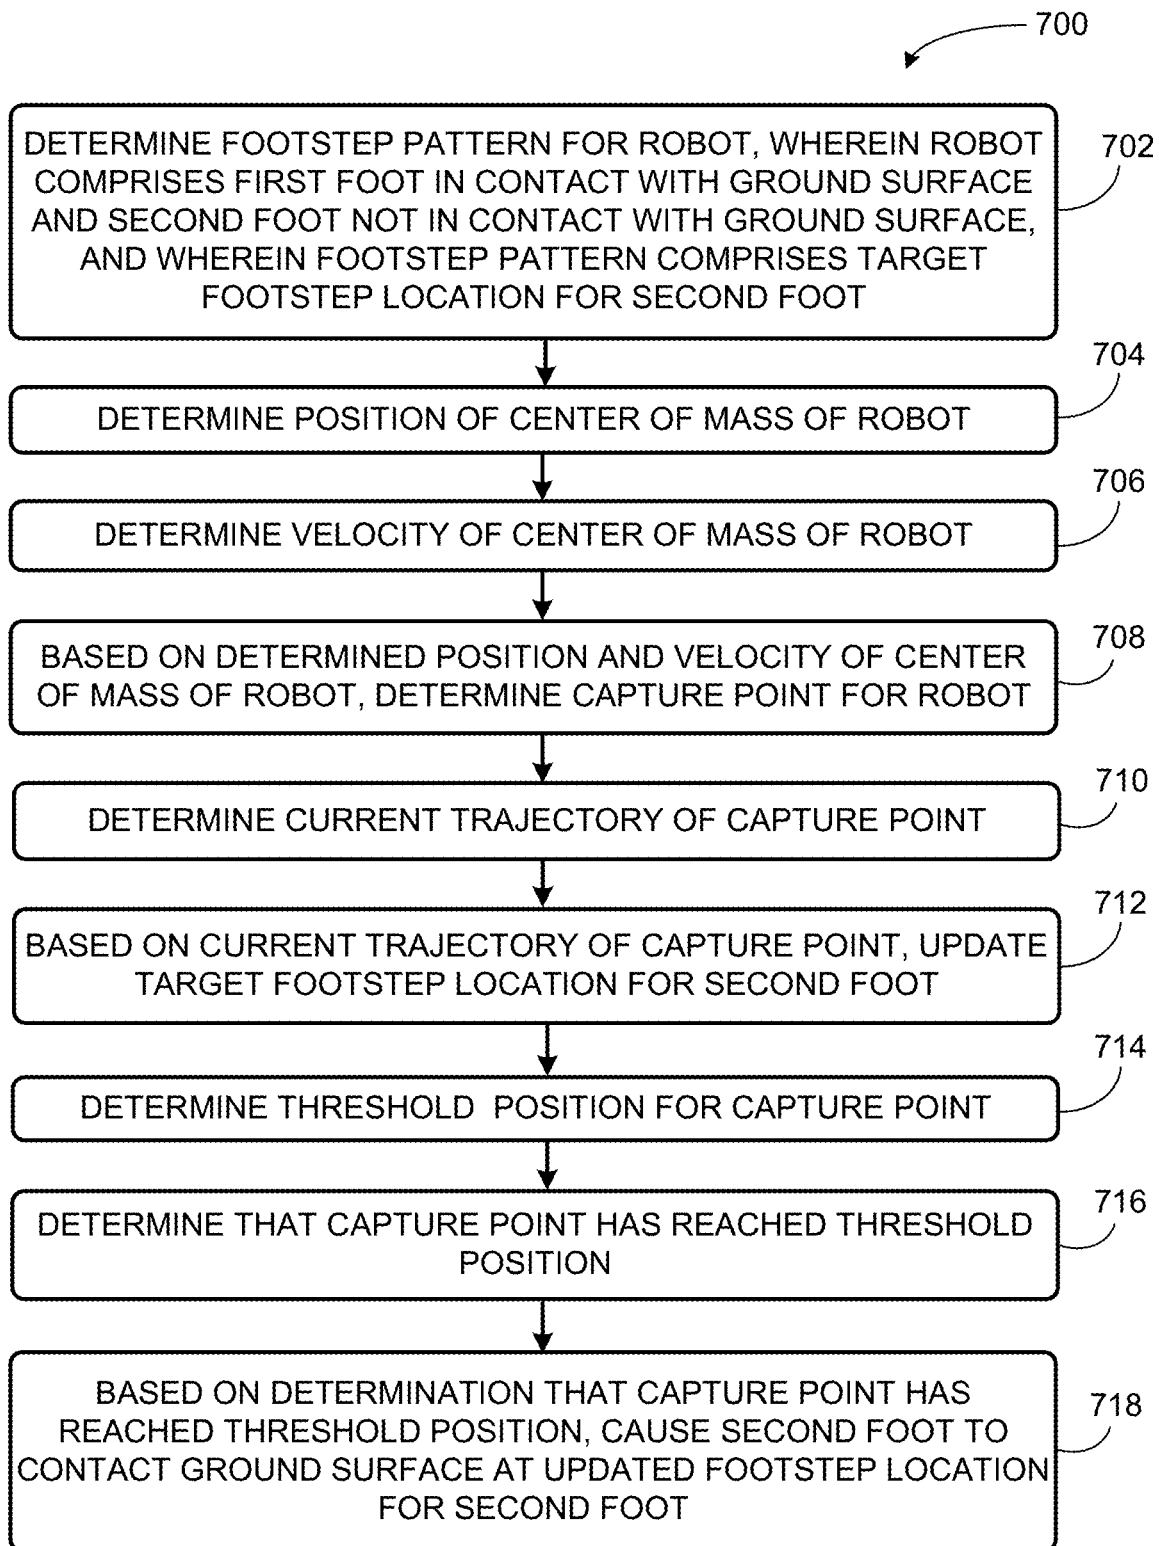


Fig. 5



**Fig. 7**

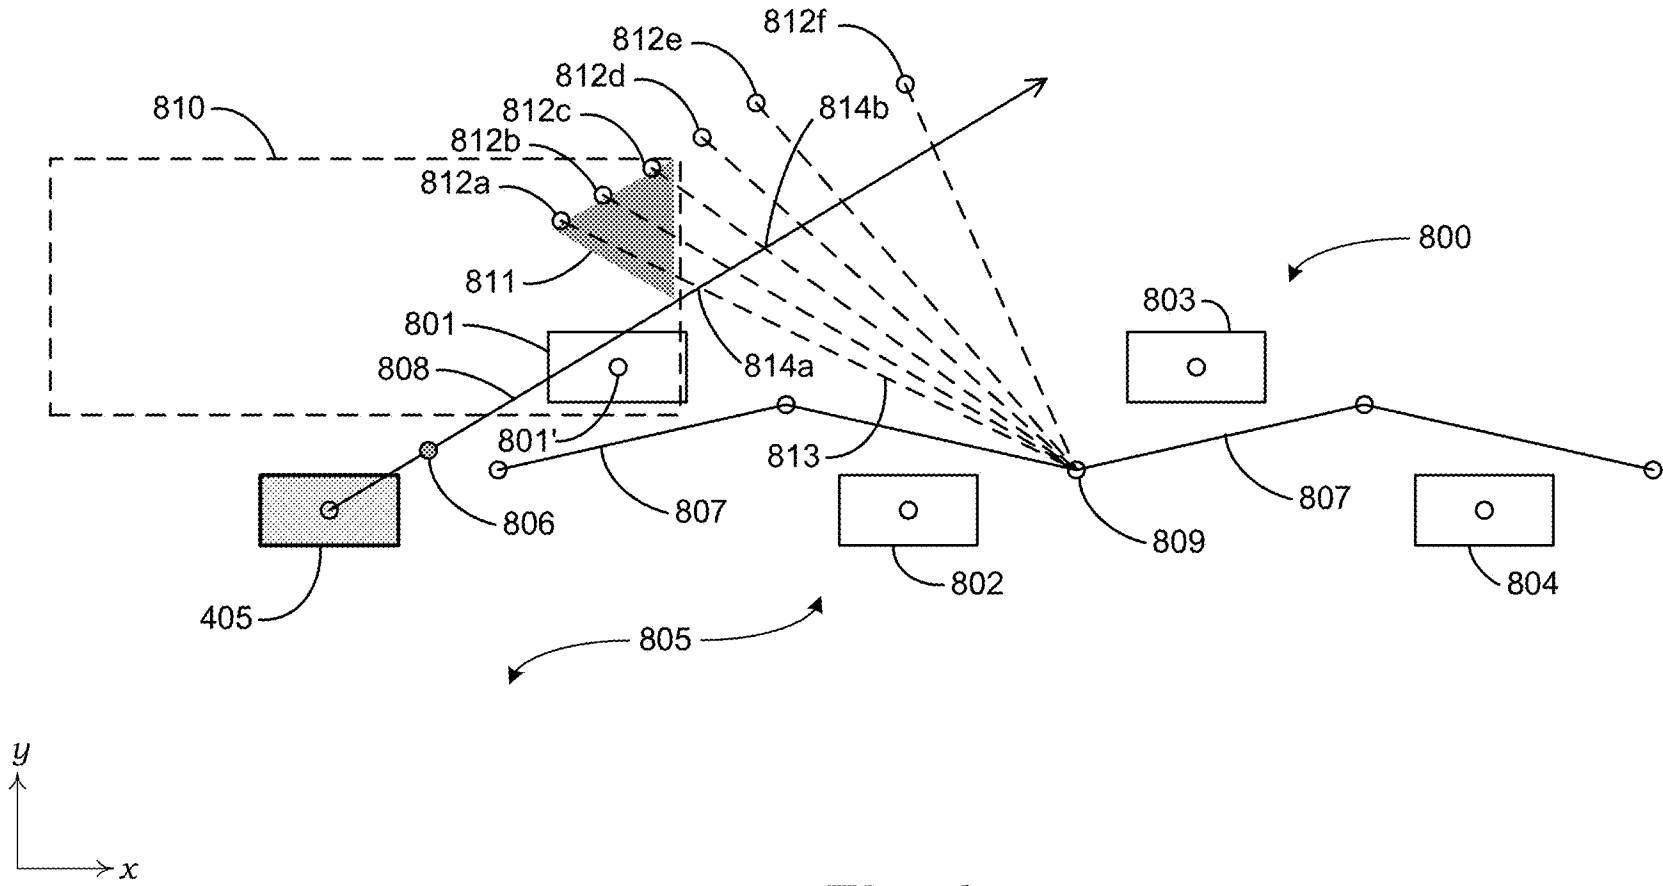


Fig. 8

MECHANICALLY-TIMED FOOTSTEPS FOR A ROBOTIC DEVICE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This U.S. patent application is a continuation of, and claims priority under 35 U.S.C. § 120 from, U.S. patent application Ser. No. 16/281,204, filed on Feb. 21, 2019, which is a continuation of U.S. patent application Ser. No. 15/331,167, filed on Oct. 21, 2016, which is a continuation of U.S. patent application Ser. No. 14/585,542, filed on Dec. 30, 2014. The disclosures of these prior applications are considered part of the disclosure of this application and are hereby incorporated by reference in their entireties.

BACKGROUND

[0002] As technology advances, various types of robotic devices are being created for performing a variety of functions that may assist users. Robotic devices may be used for applications involving material handling, transportation, welding, assembly, and dispensing, among others. Over time, the manner in which these robotic systems operate is becoming more intelligent, efficient, and intuitive. As robotic systems become increasingly prevalent in numerous aspects of modern life, the desire for efficient robotic systems becomes apparent. Therefore, a demand for efficient robotic systems has helped open up a field of innovation in actuators, movement, sensing techniques, as well as component design and assembly.

SUMMARY

[0003] The present disclosure generally relates to controlling a legged robot. Specifically, implementations described herein may allow for efficient operation of a legged robot by determining mechanically-timed footsteps for the robot. These as well as other aspects, advantages, and alternatives will become apparent to those of ordinary skill in the art by reading the following detailed description, with reference where appropriate to the accompanying drawings.

[0004] A first example implementation may include (i) determining, by a robot, a position of a center of mass of the robot, wherein the robot includes a first foot in contact with a ground surface and a second foot not in contact with the ground surface; (ii) determining a velocity of the center of mass of the robot; (iii) based on the determined position of the center of mass and the determined velocity of the center of mass, determining a capture point for the robot, where the capture point indicates a position on the ground surface; (iv) determining a threshold position for the capture point, where the threshold position is based on a target trajectory for the capture point after the second foot contacts the ground surface; (v) determining that the capture point has reached the threshold position; and (vi) based on the determination that the capture point has reached the threshold position, causing, by the robot, the second foot to contact the ground surface.

[0005] A second example implementation may include (i) determining, by a robot, a footstep pattern for the robot, where the robot comprises a first foot in contact with a ground surface and a second foot not in contact with the ground surface, and where the footstep pattern includes a target footstep location for the second foot; (ii) determining a position of a center of mass of the robot; (iii) determining

a velocity of the center of mass of the robot; (iv) based on the determined position of the center of mass and the determined velocity of the center of mass, determining a capture point for the robot, where the capture point indicates a position on the ground surface; (v) determining a current trajectory for the capture point; (vi) based on the current trajectory of the capture point, updating the target footstep location for the second foot; (vii) determining a threshold position for the capture point, where the threshold position is based on a target trajectory for the capture point after the second foot contacts the ground surface; (viii) determining that the capture point has reached the threshold position; and (ix) based on the determination that the capture point has reached the threshold position, causing, by the robot, the second foot to contact the ground surface at the updated target footstep location for the second foot.

[0006] A third example implementation may include a system having means for performing operations in accordance with the first example implementation.

[0007] A fourth example implementation may include a system having means for performing operations in accordance with the second example implementation.

[0008] A fifth example implementation may include a biped robot having (i) a first foot; (ii) a second foot; (iii) a processor; (iv) a non-transitory computer readable medium, and (v) program instructions stored on the non-transitory computer readable medium that, when executed by the processor, cause the biped robot to perform operations in accordance with the first example implementation.

[0009] A sixth example implementation may include a biped robot having (i) a first foot; (ii) a second foot; (iii) a processor; (iv) a non-transitory computer readable medium, and (v) program instructions stored on the non-transitory computer readable medium that, when executed by the processor, cause the biped robot to perform operations in accordance with the second example implementation.

DESCRIPTION OF DRAWINGS

[0010] FIG. 1 illustrates a configuration of a robotic system, according to an example implementation.

[0011] FIG. 2 illustrates a quadruped robot, according to an example implementation.

[0012] FIG. 3 illustrates another quadruped robot, according to an example implementation.

[0013] FIG. 4 illustrates a biped robot, according to an example implementation.

[0014] FIG. 5 is a flowchart according to an example implementation.

[0015] FIG. 6 illustrates a footstep pattern for a robot according to an example implementation.

[0016] FIG. 7 is a flowchart according to an example implementation.

[0017] FIG. 8 illustrates a footstep pattern for a robot according to an example implementation.

DETAILED DESCRIPTION

[0018] Example implementations are described herein. The words “example,” “exemplary,” and “illustrative” are used herein to mean “serving as an example, instance, or illustration.” Any implementation or feature described herein as being an “example,” being “exemplary,” or being “illustrative” is not necessarily to be construed as preferred or advantageous over other implementations or features. The

example implementations described herein are not meant to be limiting. Thus, the aspects of the present disclosure, as generally described herein and illustrated in the figures, can be arranged, substituted, combined, separated, and designed in a wide variety of different configurations, all of which are contemplated herein. Further, unless otherwise noted, figures are not drawn to scale and are used for illustrative purposes only. Moreover, the figures are representational only and not all components are shown. For example, additional structural or restraining components might not be shown.

I. OVERVIEW

[0019] Example implementations relate to the determination of mechanically-timed footsteps for a robotic device. In some implementations, a robot may determine a footstep pattern. The footstep pattern may define a target path for the robot to follow and the locations of the footsteps the robot will take along the path. The footstep pattern may be based on a given destination, obstacles that it may be desirable for the robot to avoid, among other examples.

[0020] During a given step, the robot may have a stance foot that is in contact with the ground surface and a swing foot that is not in contact with the ground surface. In some prior implementations, a robot might utilize a predetermined, clock-based timing for determining when to cause its swing foot to contact the ground surface, and then cause its stance foot to lift off of the ground surface. For instance, a robot might take footsteps at one second intervals, half-second intervals, among other examples.

[0021] Conversely, in the implementations described below, although the position of the robot's footsteps may be predetermined, the timing of when the robot will put down its swing foot and pick up its stance foot (i.e., when to take the next step) might not be predetermined. Rather, the robot may maintain its balance and react to disturbances in its gait by mechanically determining the timing for when to switch to the next step.

[0022] For example, the robot may determine a capture point on the ground surface during a given step. The capture point is based on the position and velocity of the robot's center of mass, and approximates the dynamic motion of the robot as if the robot's center of mass were falling as a linear inverted pendulum. Based on this model, the capture point represents the position on the ground surface where the robot may place its swing foot in order to completely arrest the falling, capturing the robot's momentum and bringing the robot to a stop. For instance, as the robot takes a step forward, with its right foot as the stance foot and with its left foot as the swing foot, the robot "falls" forward and to the left, and thus the capture point may generally follow the movement of the robot's center of mass, forward and to the left. If the robot were to cause its left foot to contact the ground surface at the position of the capture point, the robot may come to a stop.

[0023] However, if the robot is to continue moving at a particular gait, the robot might not step directly to the capture point. Instead, the robot may determine a threshold position for the capture point during a given step, and then base the timing of when to place its swing foot (e.g., its left foot) down and lift up its stance foot (e.g., its right foot) on a determination that the capture point has reached the threshold position. For instance, the threshold position for the capture point may be medial to the predetermined

footstep location where the left foot will touch down. Thus, as the capture point approaches the threshold position, the left foot will touch down laterally outside of the capture point and the robot's center of mass. The shift in weight to the robot's left foot, formerly the swing foot, will cause the capture point to move back to the right, as the robot's center of mass "falls" toward the next footstep location for the right foot.

[0024] The threshold position for the capture point may be determined based on a number of variables. For a given footstep, the robot may determine its center of pressure, which represents the point at which the robot's mass acts upon the ground surface. According to the model of the robot falling as a linear inverted pendulum, the center of pressure represents the point about which the pendulum (i.e., the robot's center of mass) moves. Thus, as the robot "falls", the center of mass and the capture point move on a trajectory away from the center of pressure.

[0025] For example, when the left foot is swinging, the threshold position for the capture point may be determined based on a target trajectory for the capture point after the left foot touches down. This target trajectory approximates the line along which the robot will "fall" during the next step, toward its next footstep location. The target trajectory may be established by two points. The first is the center of pressure during the next step, which may be determined based on the known position of the upcoming stance foot (the left foot). The second point is a target position for the capture point at the end of the upcoming step of the right foot. The target position may be determined based on the determined footstep pattern, for example the given stride length and stance width, as well as the duration of the target swing period. The threshold position for the capture point may lie on a line between these two points that define the target trajectory, and may consider other factors as well.

[0026] When the capture point reaches the threshold position, the robot places the left foot down and picks the right foot up. This may cause the robot to "fall", and thereby cause the capture point to move, along the target trajectory established by the robot's center of pressure and the target position for the capture point. Further, the target position for the capture point may also represent the next threshold position for the capture point. Therefore, once the capture point approaches this next threshold, the robot may place its right foot (now the swing foot) down and pick up its left foot, and so on.

[0027] In some cases, the robot may experience a disturbance to its gait that may alter the current trajectory of the capture point. The robot may react to the gait disturbance by updating the threshold position for the capture point, adjusting the location of the center of pressure, adjusting its center of gravity in order to affect the trajectory of the capture point, among other examples.

[0028] However, in some cases, a gait disturbance may be such that the robot might not be able to correct it while still maintaining the determined footstep pattern. In these situations, the robot may determine an updated target footstep location for the swing foot that may place the capture point on a trajectory back toward the target trajectory, and return the robot to the determined footstep pattern.

II. EXAMPLE ROBOTIC SYSTEMS

[0029] Referring now to the figures, FIG. 1 illustrates an example configuration of a robotic system. The robotic

system 100 represents an example robotic system configured to perform the implementations described herein. Additionally, the robotic system 100 may be configured to operate autonomously, semi-autonomously, and/or using directions provided by user(s), and may exist in various forms, such as a biped robot or a quadruped robot, among other examples. Furthermore, the robotic system 100 may also be referred to as a robotic device, mobile robot, or robot, among others.

[0030] As shown in FIG. 1, the robotic system 100 may include processor(s) 102, data storage 104, program instructions 106, and controller(s) 108, which together may be part of a control system 118. The robotic system 100 may also include sensor(s) 112, power source(s) 114, mechanical components 110, and electrical components 116. Note that the robotic system 100 is shown for illustration purposes as robotic system 100 and may include more or less components within various examples. The components of robotic system 100 may be connected in any manner, including wired or wireless connections, etc. Further, in some examples, components of the robotic system 100 may be positioned on multiple entities rather than a single entity. Other example illustrations of robotic system 100 may exist.

[0031] Processor(s) 102 may operate as one or more general-purpose processors or special purpose processors (e.g., digital signal processors, application specific integrated circuits, etc.). The processor(s) 102 may be configured to execute computer-readable program instructions 106 that are stored in the data storage 104 and are executable to provide the operations of the robotic system 100 described herein. For instance, the program instructions 106 may be executable to provide functionality of controller(s) 108, where the controller(s) 108 may be configured to cause activation and deactivation of the mechanical components 110 and the electrical components 116.

[0032] The data storage 104 may exist as various types of storage configured to hold memory. For example, the data storage 104 may include or take the form of one or more computer-readable storage media that can be read or accessed by processor(s) 102. The one or more computer-readable storage media can include volatile and/or non-volatile storage components, such as optical, magnetic, organic or other memory or disc storage, which can be integrated in whole or in part with processor(s) 102. In some implementations, the data storage 104 can be implemented using a single physical device (e.g., one optical, magnetic, organic or other memory or disc storage unit), while in other implementations, the data storage 104 can be implemented using two or more physical devices, which may communicate via wired or wireless communication. Further, in addition to the computer-readable program instructions 106, the data storage 104 may include additional data such as diagnostic data, among other possibilities.

[0033] The robotic system 100 may include at least one controller 108, which may interface with the robotic system 100. The controller 108 may serve as a link between portions of the robotic system 100, such as a link between mechanical components 110 and/or electrical components 116. In some instances, the controller 108 may serve as an interface between the robotic system 100 and another computing device. Further, the controller 108 may serve as an interface between the robotic system 100 and a user(s). The controller 108 may include various components for communicating with the robotic system 100, including a joystick(s), buttons, among others. The example interfaces and communications

noted above may be implemented via a wired or wireless connection, or both. The controller 108 may perform other functions for the robotic system 100 as well. Other examples of controllers may exist.

[0034] Mechanical components 110 represent possible hardware of the robotic system 100 that may enable the robotic system 100 to operate and perform physical operations. As a few examples, the robotic system 100 may include actuator(s), extendable leg(s) (“legs”), arm(s), wheel(s), one or more structured bodies for housing the computing system or other components, and other mechanical components. The mechanical components 110 may depend on the design of the robotic system 100 and may also be based on the functions and/or tasks the robotic system 100 may be configured to perform. As such, depending on the operation and functions of the robotic system 100, different mechanical components 110 may be available for the robotic system 100 to utilize. In some examples, the robotic system 100 may be configured to add and/or remove mechanical components 110, which may involve assistance from a user and/or other robot. For example, the robotic system 100 may be initially configured with four legs, but may be altered by a user or the robotic system 100 to remove two of the four legs to operate as a biped. Other examples of mechanical components 110 may be included within some implementations.

[0035] Additionally, the robotic system 100 may include one or more sensor(s) 112 arranged to sense aspects of the robotic system 100. The sensor(s) 112 may include one or more force sensors arranged to measure load on various components of the robotic system 100. In an example, the sensor(s) 112 may include one or more force sensors on each leg. Such force sensors on the legs may measure the load on the actuators that move one or more members of the legs.

[0036] The sensor(s) 112 may further include one or more position sensors. Position sensors may sense the position of the actuators of the robotic system. In one implementation, position sensors may sense the extension, retraction, or rotation of the actuators on the legs of the robot. The sensor(s) 112 may further include one or more velocity and/or acceleration sensors. For instance, the sensor(s) 112 may include an inertial measurement unit (IMU). The IMU may sense velocity and acceleration in the world frame, with respect to the gravity vector. The velocity and acceleration of the IMU may then be translated to the robotic system, based on the location of the IMU in the robotic system and the kinematics of the robotic system. Other sensor(s) 112 are also possible, including proximity sensors, motion sensors, load sensors, touch sensors, depth sensors, ultrasonic range sensors, and infrared sensors, among other possibilities.

[0037] The sensor(s) 112 may provide sensor data to the processor(s) 102 to allow for appropriate interaction of the robotic system 100 with the environment as well as monitoring of operation of the systems of the robotic system 100. The sensor data may be used in evaluation of various factors for activation and deactivation of mechanical components 110 and electrical components 116 by controller 108 and/or a computing system of the robotic system 100.

[0038] The sensor(s) 112 may provide information indicative of the environment of the robot for the controller 108 and/or computing system to use to determine operations for the robotic system 100. For example, the sensor(s) 112 may capture data corresponding to the terrain of the environment or location of nearby objects, which may assist with envi-

ronment recognition and navigation, etc. In an example configuration, the robotic system 100 may include a sensor system that includes RADAR, LIDAR, SONAR, VICON®, one or more cameras, a global positioning system (GPS) transceiver, and/or other sensors for capturing information of the environment of the robotic system 100. The sensor(s) 112 may monitor the environment in real-time and detect obstacles, elements of the terrain, weather conditions, temperature, and/or other parameters of the environment for the robotic system 100.

[0039] Further, the robotic system 100 may include other sensor(s) 112 configured to receive information indicative of the state of the robotic system 100, including sensor(s) 112 that may monitor the state of the various components of the robotic system 100. The sensor(s) 112 may measure activity of systems of the robotic system 100 and receive information based on the operation of the various features of the robotic system 100, such the operation of extendable legs, arms, or other mechanical and/or electrical features of the robotic system 100. The sensor data provided by the sensors may enable the computing system of the robotic system 100 to determine errors in operation as well as monitor overall functioning of components of the robotic system 100. For example, the computing system may use sensor data to determine a stability of the robotic system 100 during operations as well as measurements related to power levels, communication activities, components that require repair, among other information. As an example configuration, the robotic system 100 may include gyroscope(s), accelerometer(s), and/or other possible sensors to provide sensor data relating to the state of operation of the robot. Further, sensor(s) 112 may also monitor the current state of a function, such as a gait, that the robotic system 100 may currently be operating. Other example uses for the sensor(s) 112 may exist as well.

[0040] Additionally, the robotic system 100 may also include one or more power source(s) 114 configured to supply power to various components of the robotic system 100. Among possible power systems, the robotic system 100 may include a hydraulic system, electrical system, batteries, and/or other types of power systems. As an example illustration, the robotic system 100 may include one or more batteries configured to provide charge to components that may receive charge via a wired and/or wireless connection. Within examples, components of the mechanical components 110 and electrical components 116 may each connect to a different power source or may be powered by the same power source. Components of the robotic system 100 may connect to multiple power sources 114 as well.

[0041] Within example configurations, any type of power source may be used to power the robotic system 100, such as a gasoline engine. Further, the power source(s) 114 may charge using various types of charging, such as wired connections to an outside power source, wireless charging, combustion, or other examples. Additionally, the robotic system 100 may include a hydraulic system configured to provide power to the mechanical components 110 using fluid power. Components of the robotic system 100 may operate based on hydraulic fluid being transmitted throughout the hydraulic system to various hydraulic motors and hydraulic cylinders, for example. The hydraulic system of the robotic system 100 may transfer a large amount of power through small tubes, flexible hoses, or other links between compo-

nents of the robotic system 100. Other power sources may be included within the robotic system 100 within examples.

[0042] The electrical components 116 may include various components capable of processing, transferring, providing electrical charge or electric signals, for example. Among possible examples, the electrical components 116 may include electrical wires, circuitry, and/or wireless communication transmitters and receivers to enable operations of the robotic system 100. The electrical components 116 may interwork with the mechanical components 110 to enable the robotic system 100 to perform various functions. The electrical components 116 may be configured to provide power from the power source(s) 114 to the various mechanical components 110, for example. Further, the robotic system 100 may include electric motors. Other examples of electrical components 116 may exist as well.

[0043] FIG. 2 illustrates an example quadruped robot 200, according to an example implementation. Among other possible functions, the robot 200 may be configured to perform some of the methods described herein during operation. The robot 200 includes a control system 202, and legs 204a, 204b, 204c, 204d connected to a body 208. Each leg may include a respective foot 206a, 206b, 206c, 206d that may contact the ground surface. The robot 200 may also include sensors (e.g., sensor 210) configured to provide sensor data to the control system 202 of the robot 200. Further, the robot 200 is illustrated carrying a load 212 on the body 208. Within other example implementations, the robot 200 may include more or less components and may additionally include components not shown in FIG. 2.

[0044] The robot 200 may be a physical representation of the robotic system 100 shown in FIG. 1 or may be based on other configurations. To operate, the robot 200 includes a computing system that may be made up of one or more computing devices configured to assist in various operations of the robot 200, which may include processing data and providing outputs based on the data. The computing system may process information provided by various systems of the robot 200 (e.g., a sensor system) or from other sources (e.g., a user, another robot, a server) and may provide instructions to the systems to operate in response.

[0045] Additionally, the computing system may monitor systems of the robot 200 during operation, to determine errors and/or monitor regular operation, for example. In some example configurations, the computing system may serve as a connection between the various systems of the robot 200 that coordinates the operations of the systems together to enable the robot 200 to perform functions. Further, although the operations described herein correspond to a computing system of a robot performing tasks, the computing system may be made of multiple devices, processors, controllers, and/or other entities configured to assist in the operation of the robot. Additionally, the computing system may operate using various types of memory and/or other components.

[0046] Although the robot 200 includes four legs 204a-204d in the illustration shown in FIG. 2, the robot 200 may include more or less legs within other examples. Further, the configuration, position, and/or structure of the legs 204a-204d may vary in example implementations. The legs 204a-204d enable the robot 200 to move and may be configured to operate in multiple degrees of freedom to enable different techniques of travel to be performed. In particular, the legs 204a-204d may enable the robot 200 to travel at various

speeds through mechanically controlling the legs **204a-204d** according to the mechanics set forth within different gaits. A gait is a pattern of movement of the limbs of an animal, robot, or other mechanical structure. As such, the robot **200** may navigate by operating the legs **204a-204d** to perform various gaits. The robot **200** may use one or more gaits to travel within an environment, which may involve selecting a gait based on speed, terrain, the need to maneuver, and/or energy efficiency.

[0047] Further, different types of robots may use different gaits due to differences in design that may prevent use of certain gaits. Although some gaits may have specific names (e.g., walk, trot, run, bound, gallop, etc.), the distinctions between gaits may overlap. The gaits may be classified based on footfall patterns—the locations on the ground surface for the placement the feet **206a-206d**. Similarly, gaits may also be classified based on mechanics.

[0048] One or more systems of the robot **200**, such as the control system **118**, may be configured to operate the legs **204a-204d** to cause the robotic **200** to move. Additionally, the robot **200** may include other mechanical components, which may be attached to the robot **200** at various positions. The robot **200** may include mechanical arms, grippers, or other features. In some examples, the legs **204a-204d** may have other types of mechanical features that enable control upon various types of surfaces that the robot may encounter, such as wheels, etc. Other possibilities also exist.

[0049] As part of the design of the example robot **200**, the body **208** of the robot **200** connects to the legs **204a-204d** and may house various components of the robot **200**. As such, the structure of the body **208** may vary within examples and may further depend on particular operations that a given robot may have been designed to perform. For example, a robot developed to carry heavy loads may have a wide body that enables placement of the load. Similarly, a robot designed to reach high speeds may have a narrow, small body that does not have substantial weight. Further, the body **208** as well as the legs **204** may be developed using various types of materials, such as various metals or plastics. Within other examples, a robot may have a body with a different structure or made of other types of materials.

[0050] The sensor(s) **210** of the robot **200** may include various types of sensors, such as the camera or sensing system shown in FIG. 2. The sensor(s) **210** is positioned on the front of the body **208**, but may be placed at other positions of the robot as well. As described for the robotic system **100**, the robot **200** may include a sensory system that includes force sensors, position sensors, IMUs, RADAR, LIDAR, SONAR, VICON®, GPS, accelerometer(s), gyroscope(s), and/or other types of sensors. The sensor(s) **210** may be configured to measure parameters of the environment of the robot **200** as well as monitor internal operations of systems of the robot **200**. As an example illustration, the robot **200** may include sensors that monitor the accuracy of its systems to enable the computing system to detect a system within the robot **100** that may be operating incorrectly. Other uses of the sensor(s) **210** may be included within examples.

[0051] The load **212** carried by the robot **200** may represent various types of cargo that the robot **200** may transport. The load **212** may also represent external batteries or other types of power sources (e.g., solar panels) that the robot **200** may utilize. The load **212** represents one example use for

which the robot **200** may be configured. The robot **200** may be configured to perform other operations as well.

[0052] Additionally, as shown with the robotic system **100**, the robot **200** may also include various electrical components that may enable operation and communication between the mechanical features of the robot **200**. Also, the robot **200** may include one or more computing systems that include one or more processors configured to perform various operations, including processing inputs to provide control over the operation of the robot **200**. The computing system may include additional components, such as various types of storage and a power source, etc.

[0053] During operation, the computing system may communicate with other systems of the robot **200** via wired or wireless connections and may further be configured to communicate with one or more users of the robot. As one possible illustration, the computing system may receive an input from a user indicating that the user wants the robot to perform a particular gait in a given direction. The computing system may process the input and may perform an operation that may cause the systems of the robot to perform the requested gait. Additionally, the robot's electrical components may include interfaces, wires, busses, and/or other communication links configured to enable systems of the robot to communicate.

[0054] Furthermore, the robot **200** may communicate with one or more users and/or other robots via various types of interfaces. In an example implementation, the robot **200** may receive input from a user via a joystick or similar type of interface. The computing system may be configured to measure the amount of force and other possible information from inputs received from a joystick interface. Similarly, the robot **200** may receive inputs and communicate with a user via other types of interfaces, such as a mobile device or a microphone. The computing system of the robot **200** may be configured to process various types of inputs.

[0055] FIG. 3 illustrates another quadruped robot **300** according to an example implementation. Similar to robot **200** shown in FIG. 2, the robot **300** may correspond to the robotic system **100** shown in FIG. 1. The robot **300** serves as another possible example of a robot that may be configured to perform some of the implementations described herein.

[0056] FIG. 4 illustrates a biped robot **400** according to another example implementation. Similar to robots **200** and **300** shown in FIGS. 2 and 3, the robot **400** may correspond to the robotic system **100** shown in FIG. 1, and may be configured to perform some of the implementations described herein. The robot **400** may include more or less components than those shown in FIG. 2 and discussed with respect to the robot **200**. For example, the robot **400** may include a control system **401** and legs **402**, **403** connected to a body **404**. Each leg may include a respective foot **405**, **406**, that may contact the ground surface. The robot **400** may also include sensors (e.g., sensor **407**) configured to provide sensor data to the control system **401** of the robot **400**.

III. EXAMPLE IMPLEMENTATIONS FOR DETERMINING MECHANICALLY-TIMED FOOTSTEPS

[0057] Example implementations are discussed below for determining mechanically-timed footsteps for a legged robot. Flow charts **500** and **700**, shown in FIGS. 5 and 7 respectively, present example operations that may be imple-

mented by a biped robot, such as the example robot **400** shown in FIG. 4. Flow charts **500** and **700** may include one or more operations or actions as illustrated by one or more of the blocks shown in each figure. Although the blocks are illustrated in sequential order, these blocks may also be performed in parallel, and/or in a different order than those described herein. Also, the various blocks may be combined into fewer blocks, divided into additional blocks, and/or removed based upon the desired implementation.

[0058] In addition, the flow charts **500** and **700** and other operations disclosed herein provide the operation of possible implementations. In this regard, each block may represent a module, a segment, or a portion of program code, which includes one or more instructions executable by a processor for implementing specific logical operations. The program code may be stored on any type of computer readable medium, for example, such as a storage device including a disk or hard drive. In addition, each block may represent circuitry that is wired to perform the specific logical operations.

[0059] Further, the term ground surface as used herein is meant to encompass any possible surface or terrain that the robot may encounter, and is not meant to be limiting. For instance, the ground surface may be indoors or outdoors, may be rigid or loose, such as sand or gravel, and may include discontinuities or irregularities such as stairs, rocks, fallen trees, debris, and the like. Numerous other examples exist.

First Example Implementation for Determining Mechanically-Timed Footsteps

[0060] FIG. 5 is a flowchart **500** illustrating operations for determining mechanically-timed footsteps for an example robot based on the robot's capture point. The following paragraphs generally discuss examples involving a biped robot with two feet, however the operations may also be applicable to robots with a different number of feet, such as a quadruped robot with four feet, among other examples. Further, the operations discussed below may be performed by a robot that is walking, trotting, or running. Other gaits are also possible.

[0061] In some example implementations, a robot may determine a footstep pattern. The robot may be, for example, the robot **400** shown in FIG. 4. The footstep pattern may define a number of target footstep locations for the both the first foot **405** and the second foot **406**. The robot **400** may then move at a given gait (e.g., walking, running, etc.) by placing its footstep at, or approximately at, the target footstep locations. The footstep pattern may be based on a given destination, the location of known obstacles for the robot to avoid, among other examples.

[0062] At block **502**, the robot **400** may determine a position of a center of mass of the robot **400**. In some cases, the robot **400** may determine its center of mass based on a point within the body **404** of the robot **400**, which may approximate the robot's center of mass when the robot **400** is standing still.

[0063] Alternatively, the robot **400** may determine a center of mass that is specific to the current posture of the robot. For example, the robot **400** may have a first foot **405** (a right foot) in contact with the ground surface and a second foot **406** (a left foot) not in contact with the ground surface. These feet may also be referred to as the "stance" foot and the "swing" foot, respectively, although these designations

will alternate as the robot **400** walks, runs, etc. Based on kinematic data from position and movement sensors in the robot's joints, the robot **400** may determine the relative position of one or more links in its arms, legs, etc., with respect to the body **404**, and then calculate a center of mass based on this information in conjunction with the known mass of each link. Other examples are also possible.

[0064] At block **504**, the robot **400** may determine a velocity of the center of mass. For example, the robot **400** may determine the velocity of the center of mass based on data received from one or more IMU sensors within the robot's body **404**, kinematic data from joint sensors, an onboard LIDAR system, or a combination of these or other sensors.

[0065] At block **506**, the robot **400** may determine a capture point based on the position of the center of mass and the velocity of the center of mass. The determination of the capture point approximates the dynamic motion of the robot **400** as if the robot's center of mass were falling according to a linear inverted pendulum. Further, the capture point itself represents a position on the ground surface where the robot **400** may place its swing foot **406** in order to completely arrest the falling, capturing the robot's momentum and bringing the robot **400** to a stop.

[0066] The capture point may be illustrated by reference to FIG. 6, which shows an example footstep pattern **600** for the robot **400**. Moving from left to right in FIG. 6, the footstep pattern **600** includes target footstep locations **601**, **602**, **603**, **604**, **605**, and **606**. In FIG. 6, the stance foot **405** (the right foot) is in contact with the ground surface **607** while the swing foot **406** (the left foot, not pictured) swings toward the target footstep location **601**. During the step, according to the linear inverted pendulum model, the robot **400** "falls" forward and to its left, toward its next footstep location. Accordingly, the capture point **608** may move along a trajectory **609**, forward and to the left, during the step.

[0067] In some cases, the robot **400** may determine a footstep pattern assuming point feet—that is, target footstep locations that are represented by a single point at which the forces exerted by the robot's foot act upon the ground surface. In other cases, such as the example shown in FIG. 6, the robot **400** may determine the footstep pattern based on an target footstep locations that consider an approximate surface area of the robot's foot that will contact the ground surface. In this case, the robot **400** may also determine a target position for the center of pressure for each target footstep location, which represents the point at which the forces exerted by the robot's foot act upon the ground surface.

[0068] In FIG. 6, the center of pressure **405'** for the current step of foot **405** is shown, as well as the target positions for the center of pressure **601'**, **602'**, **603'**, **604'**, **605'**, and **606'** for each respective target footstep location. According to the linear inverted pendulum model, the robot's current center of pressure **405'** represents the point about which the pendulum (i.e., the robot's center of mass) moves. Thus, as the robot **400** "falls" forward and to the left, the center of mass and, therefore, the capture point **608**, move on a trajectory **609** away from the center of pressure **405'**.

[0069] The timing for when the robot **400** will cause the swing foot **406** to contact the ground surface **607** may be determined mechanically by the robot **400**. For instance, the robot **400** may repeat the operation of determining the capture point **608** at a frequency within the range of 100-

1000 Hz, and thereby update the position of the capture point **608** as it moves along trajectory **609**. For instance, the robot **400** may determine the position of the capture point **608** at a rate of 333 Hz.

[0070] Further, at block **508**, the robot **400** may determine a threshold position **610** for the capture point **608**. The robot **400** may also determine, at block **510**, that the capture point **608** has reached the threshold position **610**.

[0071] At block **512**, based on the determination that the capture point **608** has reached the threshold position **610**, the robot **400** may cause the swing foot **406** to contact the ground surface **607**. For example, the threshold position **610** may be located such that the swing foot **405** will contact the ground surface laterally outside the capture point **608**, just before it reaches the threshold position **610**. As the robot **400** lifts the stance foot **405** off the ground surface **607**, the stance foot becomes the swing foot and the center of pressure will move from **405'** to **601'**. This, in turn, will cause the robot **400** to “fall” (and the capture point **608** to move) along a new trajectory **611**, away from the center of pressure **601'**, and toward the next target footstep location **602**.

[0072] Accordingly, the threshold position **610** may be based on the target trajectory **611** for the capture point **608**. As discussed, the target trajectory **611** corresponds to the movement of the capture point **608** after the swing foot **406** contacts the ground surface **607**. In other words, the robot **400** may determine when to place its swing foot **406** on the ground surface **607** based on the target trajectory **611** for the capture point **608**.

[0073] The target trajectory **611** for the capture point **608** may be determined based on several variables. For example, the target trajectory is defined by two points. The first point is the center of pressure **601'** for the upcoming step, which is known based on the determined footstep pattern **600**, and the known footstep location **601**.

[0074] The second point is a target position **612** for the capture point **608** at the end of the next step, when the right foot **405** (now the swing foot) contacts the ground surface **607** at target footstep location **602**. For example, the right foot **405** may have a nominal swing period with a beginning and an end. The target position **612** corresponds to the position of the capture point **608** at the end of the nominal swing period for the right foot **405**. The threshold position **610** may lie on a line between these two points defining the target trajectory **611**, and may consider other factors as well. For example, the threshold position **610** may be based on the size and configuration of the robot **400**, the footstep pattern **600**, the robot's forward velocity, the current posture of the robot **400**, among other examples.

[0075] As can be seen in FIG. 6, the target position **612** may also correspond to the next threshold position for the capture point **608**. Thus, the geometric pattern for the threshold position is repetitive for a constant footstep pattern **600**. Each threshold position is determined such that the next footstep will “push” the capture point **608** along the next target trajectory, toward the next threshold position, and so on.

[0076] Each threshold position, including the threshold position **610**, may be determined based on the intersection of a lateral threshold and a forward threshold, as shown in FIG. 6. The lateral and forward thresholds may be determined based on the geometry of the footstep pattern **600**, including the stance width w_d and the stride length Δx . Further,

because the threshold position **610** is based on the target position **612** for the capture point **608** at the end of the upcoming step, the threshold position **610** is also based on the nominal swing period T for the upcoming step. The nominal swing period T may be related to the stride length Δx by the following equation:

$$\Delta x = \dot{x}_d T$$

[0077] where \dot{x}_d is the target forward velocity for the gait of the robot **400**. For example, if the target velocity \dot{x}_d for a given stride length increases, the nominal swing period T for the swing leg will decrease proportionally. The target gait velocity \dot{x}_d may be input by a user, determined by the robot **400** based on its navigation and control systems, among other examples.

[0078] Further, the forward and lateral thresholds may be based on the dynamic motion of the robot **400** according to the linear inverted pendulum model. For example, the robot **400** may include a height, z , from the swing foot **406** to the robot's center of mass. Accordingly, the height z may correspond to the length of the pendulum, and may yield a time constant, λ , that represents the natural frequency of the robot **400** when modeled as a falling pendulum according to the following equation:

$$\lambda = \sqrt{\frac{z}{g}}$$

[0079] where g is the acceleration due to gravity. The time constant λ is based on the configuration of the robot **400**, specifically its height. For example, a robot **400** with relatively longer legs **402**, **403** will “fall” according to the pendulum model at a different rate than a robot **400** that has relatively shorter legs **402**, **403**.

[0080] Based on the variables discussed above, the robot **400** may determine a first forward threshold **613a** as a distance **614** from the center of pressure **405'**. The first forward threshold **613a** may correspond to the nominal forward position of the capture point **608** at the beginning of the swing period for the swing foot **406**, i.e., at nominal swing time (0), when the stance foot **405** first contacts the ground surface **607**. The robot **400** may calculate the first forward threshold **613a** based on the following equation:

$$x_{cap,nom}(0) - x_{smc}(0) = \frac{-\dot{x}_d T}{1 - \exp(\lambda T)}$$

[0081] where $x_{cap,nom}(0)$ represents the x-position of the capture point **608** at nominal time zero, and $x_{smc}(0)$ represents the x-position of the stance foot **405** at nominal time zero. Thus, the difference between the two represents the distance **614**, in the x-direction, between the stance foot **405** and the capture point **608** at the beginning of the step.

[0082] The robot **400** may also determine a second forward threshold **613b** as a distance **615** from the center of pressure **405'** of the stance foot **405**. The second forward threshold **613b** may correspond to the nominal forward position of the capture point **608** at the end of the swing period for the swing foot **406**, i.e., at nominal swing time (T), when the swing foot **406** first contacts the ground

surface **607** at target footstep location **601**. The robot **400** may calculate the second forward threshold **613b** based on the following equation:

$$x_{cap,nom}(T) - x_{stmc}(0) = \frac{-x_d T \exp(\lambda T)}{1 - \exp(\lambda T)}$$

[0083] where $x_{cap,nom}(T)$ represents the x-position of the capture point **608** at nominal time T, at the end of the swing period, and $x_{stmc}(0)$ represents the x-position of the stance foot **405** at nominal time zero during the step. Thus, the difference between the two represents the distance **615**, in the x-direction, between the stance foot **405** and the capture point **608** at the end of the step.

[0084] As noted above, these equations are applicable at each target location of the stance foot of the robot **400**.

[0085] Similarly, the robot **400** may determine a first lateral threshold **616a** as a distance **617** from the center of pressure **405'** of the stance foot **405**. The first lateral threshold **616a** may correspond to the nominal lateral position of the capture point **608** at the beginning of the swing period for the swing foot **406**, i.e., at nominal swing time (0), when the stance foot **405** first contacts the ground surface **607**. The robot **400** may calculate the first lateral threshold **616a** based on the following equation:

$$y_{cap,nom}(0) - y_{stmc}(0) = \frac{\pm w_d}{1 + \exp(\lambda T)}$$

[0086] where, similar to the equations above, $y_{cap,nom}(0)$ represents the y-position of the capture point **608** at nominal time 0, at the beginning of the swing period, and $y_{stmc}(0)$ represents the y-position of the stance foot **405** at nominal time zero during the step. Thus, the difference between the two represents the distance **617**, in the y-direction, between the stance foot **405** and the capture point **608** at the beginning of the step.

[0087] The robot **400** may also determine a second lateral threshold **616b** as a distance **618** from the center of pressure **405'** of the stance foot **405**. The second lateral threshold **616b** may correspond to the nominal lateral position of the capture point **608** at the end of the swing period for the swing foot **406**, i.e., at nominal swing time (T), when the swing foot **406** first contacts the ground surface **607** at target footstep location **601**. The robot **400** may calculate the second lateral threshold **616b** based on the following equation:

$$y_{cap,nom}(T) - y_{stmc}(0) = \frac{\pm w_d \exp(\lambda T)}{1 + \exp(\lambda T)}$$

[0088] where $y_{cap,nom}(T)$ represents the y-position of the capture point **608** at nominal time T, at the end of the swing period, and $y_{stmc}(0)$ represents the y-position of the stance foot **405** at nominal time zero during the step. Thus, the difference between the two represents the distance **618**, in the y-direction, between the stance foot **405** and the capture point **608** at the end of the step.

[0089] Further, the y-direction equations above each have two solutions, one positive and one negative. The two

solutions may be used for the alternating right and left stance feet, respectively. For instance, when the right foot **405** is the stance foot, the two lateral thresholds **616a**, **616b** are located in the positive y-direction from the right foot **405** (i.e., “up” in FIG. 6). Alternatively, when the left foot **406** is the stance foot, the two lateral thresholds **616a**, **616b** are located in the negative y-direction from the left foot **406** (i.e., “down” in FIG. 6).

[0090] As noted above, the robot **400** may cause the swing foot **406** to contact the ground surface **607** based on a determination that the capture point **608** has reached the threshold **610**. For example, the robot **400** may update the position of the capture point **608** as it moves along trajectory **609**. The robot **400** may determine the distance between the capture point **608** and the threshold position **610**, and similarly update the determined distance between the two. As the capture point **608** approaches the threshold **610**, the robot may begin to cause the swing foot **406** to contact the ground surface **607**.

[0091] In some cases, the robot may cause the swing foot **406** to contact the ground surface **607** slightly before the capture point **608** reaches the threshold position **610**. For example, based on the trajectory **609** of the capture point **608**, the robot **400** may determine an approximate time until the capture point **608** reaches the threshold position **610**. The approximate time may be expressed as a range, such as 0-100 milliseconds, a percentage of the nominal step duration, among other examples. The robot **400** may then cause the swing foot **406** to contact the ground surface **607** within the range of, for instance, 0-100 milliseconds before the capture point **608** reaches the threshold position **610**. In some situations, this may allow the robot **400** to more readily shift its weight from the stance foot **405**, and then pick up the stance foot **405**.

[0092] In the examples discussed above, each step of the robot **400** is mechanically-timed. That is, the robot **400** determines when to put down its swing foot based on the current dynamics of its gait, namely the position and trajectory of the capture point **608**. And although the threshold position **610** is based in part on a nominal swing period for the foot **405**, the actual footstep timing might not correspond to the nominal swing period.

[0093] For instance, the robot **400** may encounter an obstacle or experience a disturbance that alters the forward velocity of the robot **400**. For example, the robot **400** may be pushed forward. For a robot with a gait that is strictly timer-based, this may be problematic because the timed footstep may occur too late to capture robot’s “falling”, which has been accelerated forward. In other words, the robot’s capture point may be too far ahead of the robot when the swing foot touches the ground. As a result, the robot might not be able to maintain its balance.

[0094] However, based on the examples of a mechanically-timed gait discussed above, the robot **400** in the same situation may determine that the position of the capture point **608** will approach the threshold **610** sooner than it would under nominal conditions. Accordingly, the robot **400** will cause the swing foot **406** to touch down at the target footstep location **601** more quickly than a nominal step, in order the “push” the capture point **608** toward the next footstep location.

[0095] Other examples are also possible, including examples where a disturbance may alter the trajectory **609** of the capture point **608**. In this situation, the robot **400** may

determine a number of responses. For instance, if the disturbance to trajectory **609** is not severe, the capture point **608** may still intersect with the target trajectory **611**. Thus, the robot **400** may estimate an intersection between the current trajectory of the capture and the target trajectory **611**, and then use this intersection as the threshold position to determine the touch down timing of the swing foot **406**.

[0096] Additionally or alternatively, the robot **400** may manipulate the actuators in its stance leg **402** so as to adjust the contact between the stance foot **405** and the ground surface **607**. In this way, the robot **400** may shift the location of the center of pressure point **405'**, which may adjust and possibly correct the trajectory of the capture point **608**. For example, the robot **400** may rotate the stance foot **405** and in doing so, shift the center of pressure **405'** more toward the outside edge of the foot **405**. Other examples are also possible.

[0097] As another example, the robot **400** may determine a posture adjustment that may alter the relative position of the robot's center of mass. For instance, if the robot **400** experiences a disturbance that causes the trajectory of the capture point **608** to stray to the left, the robot **400** may respond by extending its right arm laterally, so as to shift the robot's overall center of mass to the right. This, in turn, may cause the trajectory of the capture point **608** to move back to the right. Numerous other disturbances and posture adjustments are also possible.

[0098] In some cases, a disturbance to the robot's gait may be such that the robot **400** cannot adequately control the trajectory of the capture point while still maintaining the determined footstep pattern **600**. Such examples are discussed further below.

[0099] Further, although the footstep pattern shown in FIG. **600** represents a relatively straight line, the robot **400** may perform substantially the same operations as those described above for footstep patterns having different configurations. For example, the robot **400** may determine a capture point and thresholds for the capture point by applying the same principles to a footstep pattern that turns in multiple directions, changes its stride length, etc.

Second Example Implementation for Determining Mechanically-Timed Footstep

[0100] FIG. **7** is another flowchart **700** illustrating operations for determining mechanically-timed footsteps for an example robot based on the robot's capture point. The following paragraphs generally discuss examples involving a biped robot with two feet, however the operations may also be applicable to robots with a different number of feet, such as a quadruped robot with four feet, among other examples. Further, the operations discussed below may be performed by a robot that is walking, trotting, or running. Other gaits are also possible.

[0101] At block **702**, a robot may determine a footstep pattern. The robot may be, for example, the robot **400** shown in FIG. **4**. The robot **400** may include a first, stance foot **405** in contact with the ground surface and second, swing foot **406** not in contact with the ground surface. The footstep pattern may be determined as generally discussed above with respect to flowchart **500**, and may include a target footstep location for the swing foot.

[0102] As also discussed above, the robot **400** may determine, at block **704**, a position of a center of mass for the robot **400**, and determine, at block **706**, a velocity of the

center of mass. Based on both of these determinations the robot **400** may, at block **708**, determine a capture point for the robot **400**, which corresponds to a point on the ground surface and approximates the dynamic motion of the robot **400** as a linear inverted pendulum, as discussed with respect to flowchart **500**.

[0103] At block **710**, the robot **400** may determine a current trajectory for the capture point. For example, the robot **400** may determine the capture point at a given frequency, as described above, and determine a current trajectory based on a series of recently determined capture points. Other examples are also possible.

[0104] FIG. **8** shows an example footstep pattern **800** for the robot **400**, including target footstep locations **801**, **802**, **803**, and **804**. In FIG. **8**, the stance foot **405** is in contact with the ground surface **805** while the swing foot **406** (not pictured) swings toward the target footstep location **801** for the swing foot **406**. Based on the geometry of the footstep pattern **800**, the capture point **806** may follow the target trajectory **807** throughout the footstep pattern **800**, as discussed and calculated above with respect FIG. **6** and flowchart **500**.

[0105] However, as shown in FIG. **8**, the robot **400** may experience a disturbance to its gait that alters the trajectory of the capture point **806**. Thus, the robot **400** may determine a current trajectory **808** for the capture point **806** that deviates substantially from the target trajectory **807**. Based on the current trajectory, the robot **400** may determine that the target footstep location **801** for the swing foot **406** is not adequate to maintain control the robot's balance, posture, etc.

[0106] The determination that the target footstep location **801** is no longer adequate may be based on a number of factors. For instance, the robot **400** may determine that the current trajectory **808** for the capture point **806** is laterally outside the target center of pressure **801'** for the upcoming step of the swing foot **406**, as shown in FIG. **8**. In this situation, causing the swing foot **406** to touch down at the target footstep location **801** may be counterproductive, as it may cause the capture point **806** to stray even further to the left. Additionally or alternatively, the robot **400** may determine that other control priorities prevent it from correcting the current trajectory **808** in the ways discussed above. Further, the robot **400** may determine that an obstacle prevents it from placing the swing foot **406** at the target footstep location **801**. Other examples are also possible.

[0107] Accordingly, at block **712**, the robot **400** may update the target footstep location for the swing foot **406**. For example, the robot **400** may determine an updated target footstep location that puts the capture point **806** on a trajectory back toward its target position **809** at the end of the following step of the right foot **405**. As noted above, the target position **809** may represent the next threshold position for the following step of the robot **400**, and may be determined as discussed above.

[0108] The potential positions for the updated target footstep location may be constrained. For instance, the robot **400** may determine a range of positions **810** for the target footstep location that is based on the mechanical limits of how far the robot **400** can reach with its swing leg **403**. The range of positions **810** may be based on other factors as well, such as obstacles, other control priorities of the robot **400**, among other examples.

[0109] However, not every location within the range of positions **810** is a feasible touchdown location for the swing foot **406**, if the capture point **806** is to return to the target capture point position **809** in a single step. Thus, the robot **400** may further determine a step constraint region **811** that is based on the range of positions **810** as well as the current trajectory **808**. As shown in FIG. **8**, the step constraint region represents a region where the robot **400** may place the swing foot **406** that may result in a trajectory for the capture point **806** that returns to the target position **809**.

[0110] For example, FIG. **8** shows a series of potential footstep locations which, for clarity, are only shown by way of their center of pressure **812a**, **812b**, **812c**, **812d**, **812e**, and **812f**. Each of these potential touchdown locations may result in a target trajectory, such as the target trajectory **813**, for the capture point **806** that may direct the capture point **806** back to the target position **809**. However, only the potential positions **812a**, **812b**, and **812c** are feasible, as they are within the step constraint region **811**. Thus, the target trajectory for the capture point may be based on the step constraint region **811**.

[0111] At block **714**, the robot **400** may determine a threshold position for the capture point **806**. In some cases, where the step constraint region **811** represents a set of possible footstep locations, the robot **400** may determine a corresponding set of threshold positions. For instance, the robot **400** may determine set of threshold positions that comprises the line from **814a** to **814b**. The robot **400** may determine, based on its other control priorities or other factors, the updated target footstep location **812a** from all of the potential locations within the step constraint region **811**. Accordingly, the robot **400** may then determine the threshold position **814a** for the capture point **806** that corresponds to the footstep location **812a**. Other examples are also possible.

[0112] At block **716**, the robot **400** may determine that the capture point **806** has reached the threshold position **814a**, as discussed above. Based on this determination, the robot **400** may, at block **718**, cause the swing foot **406** to contact the ground surface **805** at the updated target footstep location **812a** for the swing foot **406**. This may cause the capture point **806** to move on the trajectory **813** back toward the target position **809**, which is the next threshold position according to the footstep pattern **800**, as described above. The robot **400** may then cause the right foot **405** (now the swing foot) to contact the ground surface **805** as the capture point **806** approaches the next threshold position, and so on.

IV. CONCLUSION

[0113] While various implementations and aspects have been disclosed herein, other aspects and implementations will be apparent to those skilled in the art. The various implementations and aspects disclosed herein are for purposes of illustration and are not intended to be limiting, with the scope being indicated by the following claims.

What is claimed is:

1. A computer-implemented method when executing by data processing hardware of a legged robot causes the data processing hardware to perform operations comprising:

receiving a gait disturbance that alters a balance for the legged robot, the legged robot defining a forward direction of locomotion;

determining that the gait disturbance dynamically shifts a center of mass for the legged robot, the dynamic shift

of the center of mass being indicative of a lateral falling motion of the legged robot;

instructing a swing leg of the legged robot located on a lateral side of the legged robot to move to a touchdown position laterally outside of the center of mass of the legged robot;

in response to the swing leg touching down at the touchdown position laterally outside the center of mass of the legged robot, causing the swing leg to exert a ground contact force that pushes the center of mass of the legged robot in a direction opposite of the lateral falling motion of the legged robot; and

instructing another swing leg of the legged robot located on an opposite lateral side of the legged robot opposite the lateral falling motion to move to a corresponding touchdown position laterally outside the center of mass of the legged robot.

2. The method of claim 1, wherein the operations further comprise, in response to the other swing leg touching down at the corresponding touchdown position laterally outside the center of mass of the legged robot, causing the other swing leg to exert a corresponding ground contact force that pushes the center of mass towards an upright pose for the legged robot.

3. The method of claim 2, wherein the upright pose corresponds to a balanced pose for the legged robot.

4. The method of claim 1, wherein receiving the gait disturbance that alters the balance for the legged robot occurs while the legged robot is performing a particular motion gait, the particular motion gait comprising at least one of a walking gait, a trotting gait, or a running gait.

5. The method of claim 1, wherein the operations further comprise, when a respective swing leg touches down, causing an actuator associated with the respective swing leg to generate the ground contact force.

6. The method of claim 1, wherein the operations further comprise, when a respective swing leg touches down, causing an actuator associated with the respective swing leg to shift a center of pressure for touchdown of the respective swing leg toward an outside edge of a foot associated with the respective swing leg.

7. The method of claim 6, wherein causing the actuator associated with the respective swing leg to shift the center of pressure for touchdown of the respective swing leg toward the outside edge of the foot associated with the respective swing leg comprises instructing the actuator to rotate the respective swing leg during touchdown.

8. The method of claim 1, wherein the legged robot comprises a body and four legs coupled to the body, and wherein two legs are coupled to each side of a body of the legged robot.

9. The method of claim 1, wherein the operations further comprise causing the legged robot to move the shifted center of mass towards a balanced position for the center of mass of the legged robot by adjusting a posture of the legged robot.

10. The method of claim 1, wherein the operations further comprise:

receiving a user input indicating a forward velocity for a gait of the legged robot; and

instructing the legged robot to traverse an environment about the legged robot executing the gait at the forward velocity input by the user.

- 11.** A robot comprising:
a body;
four legs coupled to the body, the four legs comprising at least one stance leg in contact with a surface and at least one swing leg not in contact with the surface;
a control system in communication with the four legs of the robot, the control system configured to perform operations comprising:
receiving a gait disturbance that alters a balance for the robot, the robot defining a forward direction of locomotion;
determining that the gait disturbance dynamically shifts a center of mass for the robot, the dynamic shift of the center of mass being indicative of a lateral falling motion of the robot;
instructing a swing leg of the robot located on a lateral side of the robot to move to a touchdown position laterally outside of the center of mass of the robot;
in response to the swing leg touching down at the touchdown position laterally outside the center of mass of the robot, causing the swing leg to exert a ground contact force that pushes the center of mass of the robot in a direction opposite of the lateral falling motion of the robot; and
instructing another swing leg of the robot located on an opposite lateral side of the robot opposite the lateral falling motion to move to a corresponding touchdown position laterally outside the center of mass of the robot.
- 12.** The robot of claim **11**, wherein the operations further comprise, in response to the other swing leg touching down at the corresponding touchdown position laterally outside the center of mass of the robot, causing the other swing leg to exert a corresponding ground contact force that pushes the center of mass towards an upright pose for the robot.
- 13.** The robot of claim **12**, wherein the upright pose corresponds to a balanced pose for the robot.

14. The robot of claim **11**, wherein receiving the gait disturbance that alters the balance for the robot occurs while the robot is performing a particular motion gait, the particular motion gait comprising at least one of a walking gait, a trotting gait, or a running gait.

15. The robot of claim **11**, wherein the operations further comprise, when a respective swing leg touches down, causing an actuator associated with the respective swing leg to generate the ground contact force.

16. The robot of claim **11**, wherein the operations further comprise, when a respective swing leg touches down, causing an actuator associated with the respective swing leg to shift a center of pressure for touchdown of the respective swing leg toward an outside edge of a foot associated with the respective swing leg.

17. The robot of claim **16**, wherein causing the actuator associated with the respective swing leg to shift the center of pressure for touchdown of the respective swing leg toward the outside edge of the foot associated with the respective swing leg comprises instructing the actuator to rotate the respective swing leg during touchdown.

18. The robot of claim **11**, wherein the operations further comprise causing the robot to move the shifted center of mass towards a balanced position for the center of mass of the robot by adjusting a posture of the robot.

19. The robot of claim **11**, wherein the operations further comprise:

receiving a user input indicating a forward velocity for a gait of the robot; and

instructing the robot to traverse an environment about the robot executing the gait at the forward velocity input by the user.

20. The robot of claim **19**, wherein determining that the gait disturbance dynamically shifts the center of mass for the legged robot comprises determining that the forward velocity input by the user has been accelerated.

* * * * *