


Rigid Vinyl Flooring Specification

Product Information

Type	SPC(RIGID VINYL FLOORING)
Dimension	229*1220mm
Thickness	6.0 mm(5.0MMSPC+1.0MMIXPE)
Wearlayer	0.5mm
Embossing	BP-R
Package	8pcs/ctn,36ctns/pallet,30pallets/20'GP
Guarantee *	
Residential Area	25 years
Light Commercial	10 years

Rigid vinyl Structure

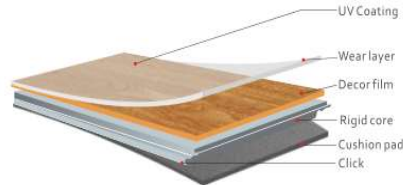

Technical Information

Technical Specification	Test standard	Value
Level of use	EN ISO 10874	23-33
Wearlayer PUR treatment	-	UV coating
Total weight g/m2	EN ISO23997	1000+13%-10%
Reaction to fire	EN 13501	Bfl-S1
Squareness&straightness	EN ISO 24342	≤ 0,20 mm/ ≤ 0,30 mm
Slip resistance	EN 13893	DS
Slip restraint	DIN 51130	R9-R10
Impact resistance(mm)	EN 13329	≥ 1600 mm
Micro-scratch resistance	EN 16094	≤ MSR-A2, ≤ MSR-B2
Residual indentation(average measure)	EN ISO 24343-1	≤ 0.2 mm
Furniture leg resistance	EN ISO 16581	No damage
Curling	EN ISO 23999	≤ 1 mm
Dimensional stability	EN ISO 23999	Norm: ≤ 0,25%
Thermal resistance	EN 12667	0.050 (m ² ·K)/W
Formaldehyde group	EN 717-1	E1
Acoustic Insulation	EN ISO 10140-3	21 dB
Castor chair resistance	EN ISO 4918	No damage on the surface
Stain resistance	EN ISO 16987	Not affected
Light fastness	EN ISO 105-B02	≥ 6
Underfloor heating	EN 12524	Suitable, max.27°C

Notes:

* Technical changes reserved by Kingdomfloors.