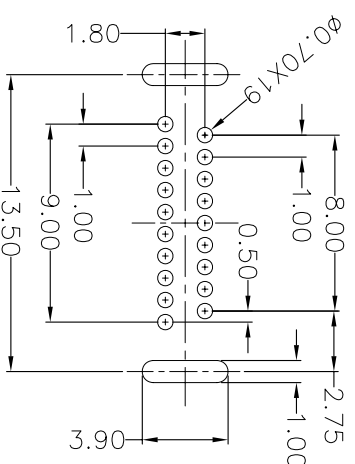
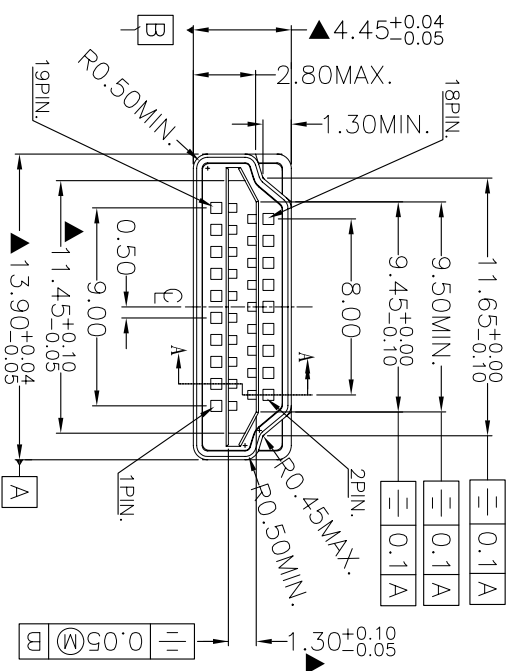


1. Insertion force: 44.1N MAX.
2. Withdrawal force: 9.8~39.2N.
3. Durability: 10000 Cycles.
4. Current rating: 0.5A
5. Voltage rating: 40V AC MAX.
6. Dielectric strength:
 - 500V AC MIN. (UNMATED)
 - 300V AC MIN. (MATED)
7. Contact resistance: 30mΩ MAX.
8. Insulation resistance:
 - 100MΩ DC MIN (UNMATED)
 - 10MΩ DC MIN (MATED)
9. Temperature: -40℃ TO +85℃
10. All the material must accord with the RoHS.
11. The important dimensions with "▲"

HAM $\bar{X}$ $\bar{X}$ $\bar{P}$ $\bar{XX}$ 61

HAM X X P XX 61

Shell Material: _____
C:C2680 F: SPCC

Shell Plating: _____
C:Gold N: Nickel

PIN: 19PIN _____

Terminal Plating:
01:Au 1u"
03:Au 3u"
05:Au 05u"
10:Au 10u"
15:Au 15u"
30:Au 30u"

				TOLERANCE UNSPECIFIED		图号 DWG. NO.	比例 SCALE
						制图 DRAWN	1:1
						审核 CHECKED	mm
						批准 APPROVED	
04	Terminal	C5191	19	Gold plated within connect area ,Tin plated within solder area		Steven Tang	
03	Cover	LCP	1	LCP+30%GF UL94-V0, Color is black		Zhu	
02	Housing	LCP	1	LCP+30%GF UL94-V0, Color is black			
01	Shell	SPCC/C2680	1	Plating nickle or gold overall			
序号 PART NO.	品名 PART NAME	材料 MATERIAL	用量 QTY	备注说明 NOTE		图号 DWG. NO.	比例 SCALE
				页次 SHEET	1/2	尺寸 SIZE	A4
						版本 REV.	A/0

RECOMMENDED PCB LAYOUT
TOP VIEW
GENERAL TOLERANCE: T=1.60mm±0.10