SPEC

Spec No.	TQ3C-8EAF0-E1DEX127-00
Date	October 13, 2016

TYPE : TCG075VGLDH-G20

< 7.5 inch VGA transmissive color TFT with LED backlight and constant current circuit for LED backlight>

CONTENTS

1. Application
2. Construction and outline
3. Mechanical specifications
4. Absolute maximum ratings
5. Electrical characteristics
6. Optical characteristics
7. Interface signals
8. Input timing characteristics
9. Lot number identification
10. Warranty
11. Precautions for use
12. Reliability test data
13. Outline drawing

Issued
Oct 14, 2016
KYOCERA
Display Corp.

KYOCERA DISPLAY CORPORATION

This specification is subject to change without notice.
Consult Kyocera before ordering.

Original Issue Date	Designed by: Engineering dept.			Confirmed by: QA dept.	
	Prepared	Checked	Approved	Checked	Approved
October 13, 2016	M. Koyama	T. Onodera	Y. Matsumoto	O. Sato	I. Hama

Warning

1. This Kyocera LCD module has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the module in such applications.

2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs, and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera modules in applications.

Caution

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.

Revision record

Date	Designed by : Engineering dept.			Confirmed by : QA dept.	
	Prepared	Checked	Approved	Checked	Approved

Rev.No.	Date	Page	Descriptions

1. Application

This document defines the specification of TCG075VGLDH-G20. (RoHS Compliant)

2. Construction and outline

LCD	: Transmissive color dot matrix type TFT
Backlight system	: LED
Polarizer	: Glare treatment
Additional circuit	: Timing controller, Power supply (3.3V input) (with constant current circuit for LED Backlight)

3. Mechanical specifications

Item	Specification	Unit
Outline dimensions 1)	173(W)×133(H)×4.4(D)	mm
Active area	151.68(W)×113.76(H) (18.9cm/7.5 inch(Diagonal))	mm
Effective viewing area	153.7(W)×115.8(H)	mm
Dot format	640×(B,G,R)(W)×480(H)	dot
Dot pitch	0.079(W)×0.237(H)	mm
Base color 2)	Normally White	-
Mass	TBD	g

1) Projection not included. Please refer to outline for details.
2) Due to the characteristics of the LCD material, the color varies with environmental temperature.

4. Absolute maximum ratings

4-1. Electrical absolute maximum ratings

Item		Symbol	Min.	Max.	Unit
Supply voltage		V_{DD}	0	4.0	V
Supply voltage(Backlight)		$V_{IN}B$	0	6.0	V
Input signal voltage 1)	RxINi+, RxINi- 2)	V_{I1}	-0.3	V_{DD}+0.3	V
	CK IN+, CK IN-	V_{I2}	-0.3	V_{DD}+0.3	V
	DPS	V_{I3}	-0.3	V_{DD}+0.3	V
	BLEN, VBRT	V_{I4}	0	$V_{IN}B$	V

1) V_{DD} must be supplied correctly within the range described in 5-1.
2) i=0,1,2

4-2. Environmental absolute maximum ratings

Item		Symbol	Min.	Max.	Unit
Operating temperature	1)	T_{OP}	-20	70	°C
Storage temperature	2)	T_{STO}	-30	80	°C
Operating humidity	3)	H_{OP}	10	4)	%RH
Storage humidity	3)	H_{STO}	10	4)	%RH
Vibration		-	5)	5)	-
Shock		-	6)	6)	-

1) Operating temperature means a temperature which operation shall be guaranteed. Since display performance is evaluated at 25°C, another temperature range should be confirmed.
2) Temp. = -30°C＜48h , Temp. = 80°C＜168h
Store LCD at normal temperature/humidity. Keep them free from vibration and shock.
An LCD that is kept at a low or a high temperature for a long time can be defective due to other conditions, even if the low or high temperature satisfies the standard.
(Please refer to "Precautions for Use" for details.)

3) Non-condensing
4) Temp.≦40°C, 85%RH Max.
Temp.＞40°C, Absolute humidity shall be less than 85%RH at 40°C.
5)

Frequency	10～55 Hz	Acceleration value (0.3～9 m/s²)
Vibration width	0.15mm	
Interval	10-55-10 Hz 1 minutes	

2 hours in each direction X, Y, Z (6 hours total)
EIAJ ED-2531

6) Acceleration: 490 m/s², Pulse width: 11 ms
3 times in each direction: ±X, ±Y, ±Z
EIAJ ED-2531

5. Electrical characteristics

5-1. LCD

Temp. = -20～70°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage for logic 1)	V_{DD}	–	3.0	3.3	3.6	V
Current consumption for logic	I_{DD}	2)	–	120	155	mA
Permissive input ripple voltage	V_{RP}	–	–	–	100	mVp-p
Input signal voltag 3)	V_{IL}	“Low” level	0	–	$0.2V_{DD}$	V
	V_{IH}	“High” level	$0.8V_{DD}$	–	V_{DD}	V
LVDS Input voltage 4)	V_{TL}	“Low” level	-0.1	–	–	V
	V_{TH}	“High” level	–	–	0.1	V
	$\lvert V_{ID} \rvert$	–	0.1	–	0.6	V
	V_{ICM}	–	$\lvert V_{ID} \rvert /2$	–	$2.4-\lvert V_{ID} \rvert /2$	V

1) V_{DD}-turn-on conditions

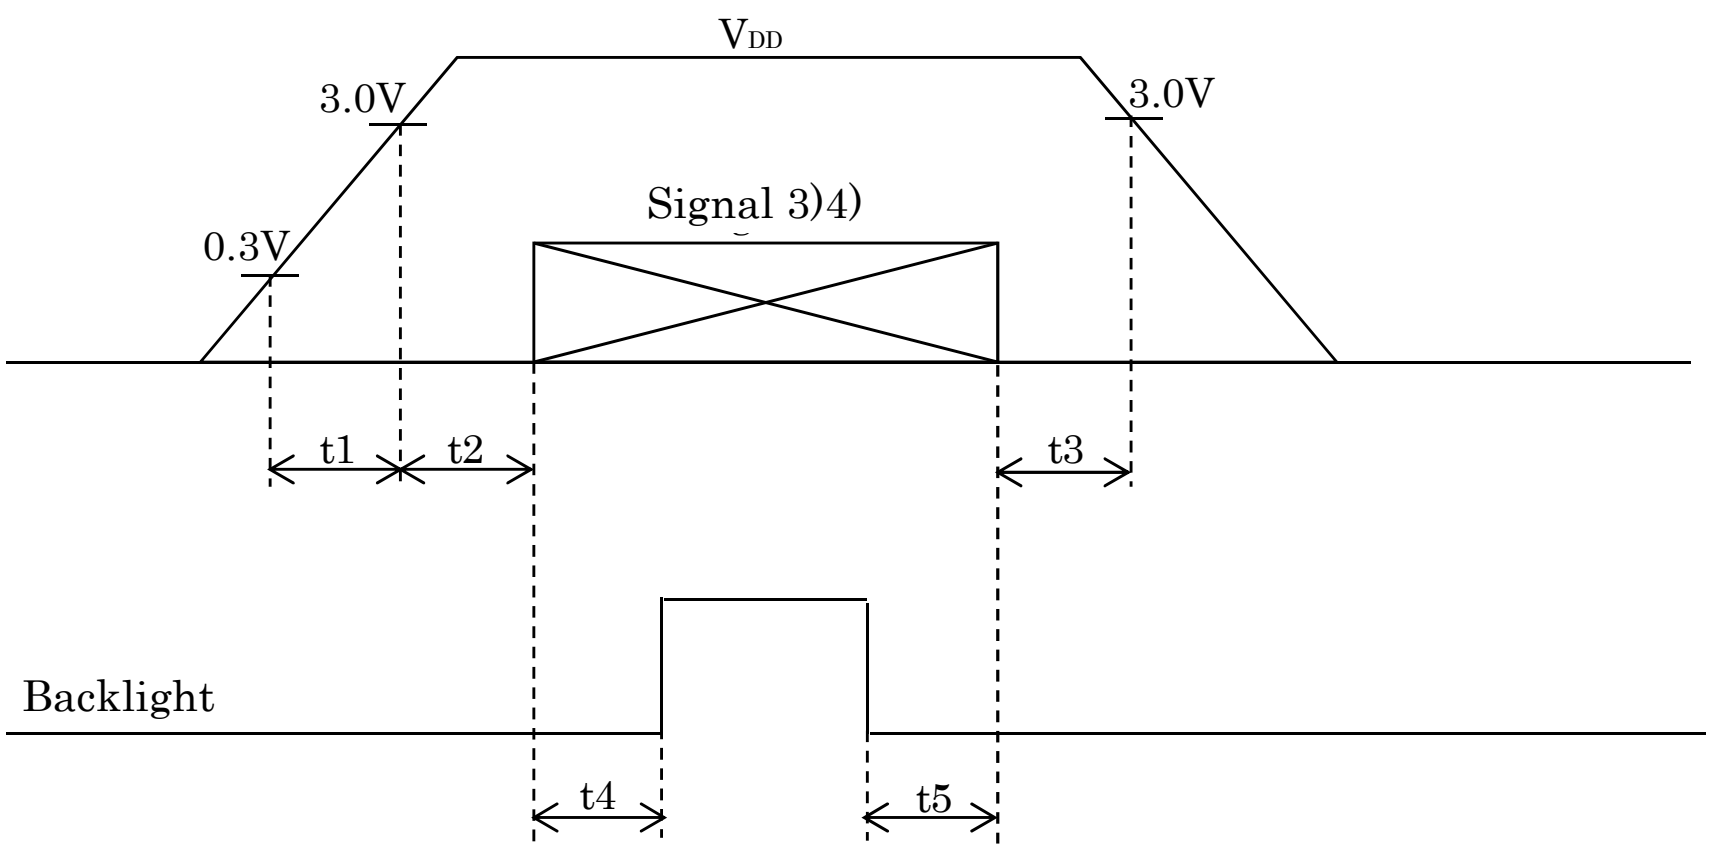

0＜t1≦20ms

0＜t2≦50ms

0＜t3≦1s

25 frame refresh ≦t4

0≦t5

2) Display pattern:

V_{DD} = 3.3V, Temp. = 25°C

123 456 789 · · · · · · · · · · · · · · 1918 1919 1920(dot)

1 ■□■□■□■□■□■□■□■□■□■□
2 □■□■□■□■□■□■□■□■□■□■
3 ■□■□■□■□■□■□■□■□■□■□
: □■□■□■□■□■□■□■□■□■□■
: ■□■□■□■□■□■□■□■□■□■□
: □■□■□■□■□■□■□■□■□■□■
479 ■□■□■□■□■□■□■□■□■□■□
480 □■□■□■□■□■□■□■□■□■□■
(dot)

3) Input signal : DPS

4) Input signal : RxIN0-/+、RxIN1-/+、RxIN2-/+、CK IN-/+

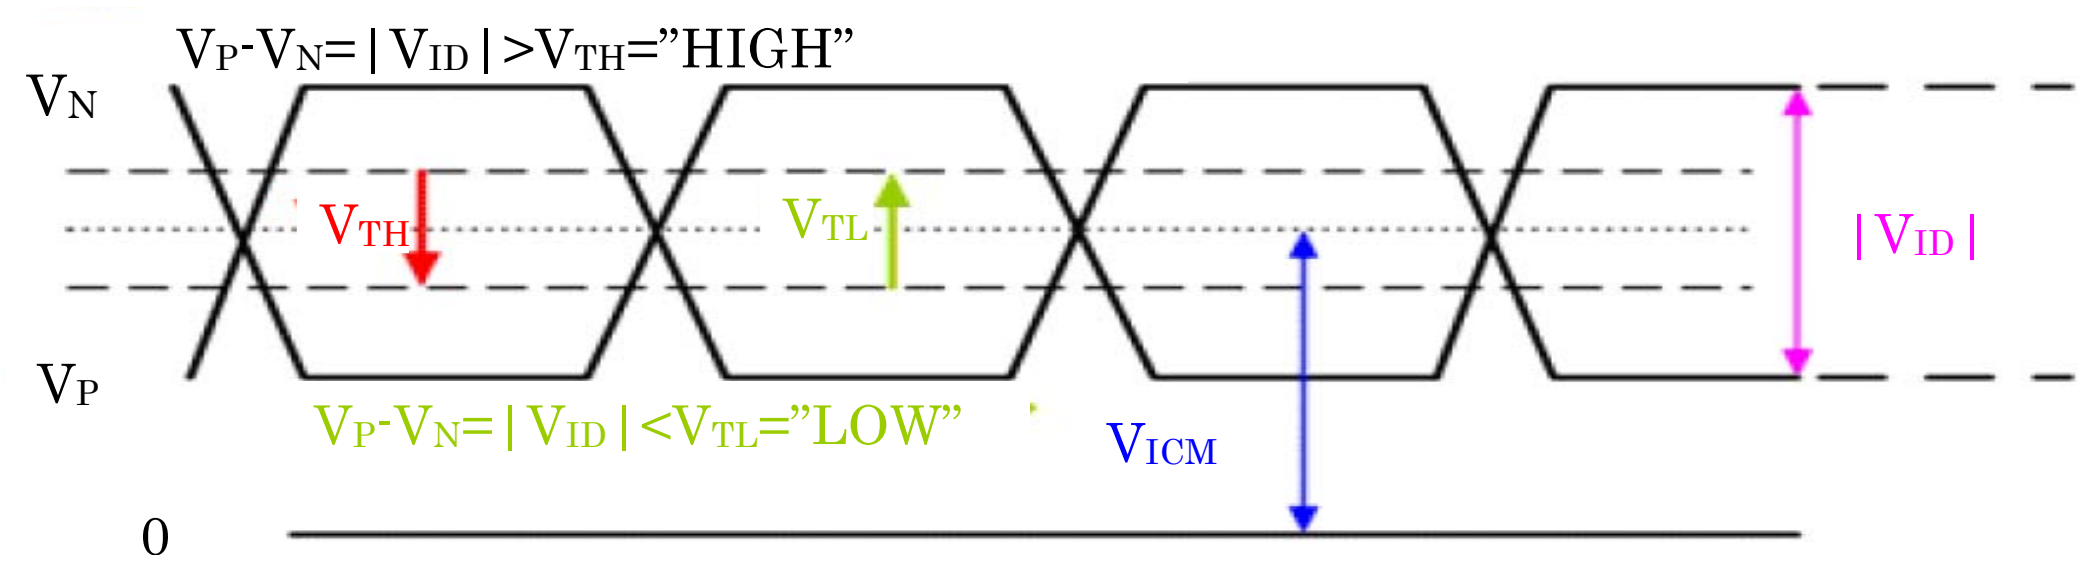
$V_P-V_N=|V_{ID}|>V_{TH}$="HIGH"
V_N
V_{TH}
V_{TL}
$|V_{ID}|$
V_P
$V_P-V_N=|V_{ID}|<V_{TL}$="LOW"
V_{ICM}
0

5-2.Backlight

Temp. = -20～70°C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply voltage	$V_{IN}B$	3.0	—	5.5	V	Ta=-20～70°C
ON-OFF (H)	BLEN	$0.8V_{IN}B$	-	$V_{IN}B$	V	Ta=-20～70°C
ON-OFF (L)		0	-	$0.2V_{IN}B$	V	Ta=-20～70°C
LED forward current 1), 2)	IF	14	15	16	mA	VBRT=0～1.4V
		2.8	3.0	3.2		VBRT=2.8V
Supply current	$I_{IN}B$	-	480	690	mA	$V_{IN}B$=3.3V, IF=15mA
		-	305	440	mA	$V_{IN}B$=5.0V, IF=15mA
Operating life time 3), 4)	T	-	40,000	-	h	IF=15mA, Ta=25℃

1) For each “LED”
2) An input current below 5.0mA may reduce the brightness uniformity of the LED backlight. This is because the amount of light from each LED chip is different. Therefore, please evaluate carefully before finalizing the input current.
3) When brightness Minimum 50% of initial brightness.
The average life of a LED will decrease when the LCD is operating at higher temperatures.
4) Life time is estimated data. (Condition : IF=15mA, Ta=25℃ in chamber)
5) When you start-up, please charge in sequence of $V_{IN}B$->BLEN, or VBRT.
When you shut-down, please stop in sequence of BLEN and/or VBRT->$V_{IN}B$.
6) Please do not connect the other than our backlight to this output connector on the PCB.

7) In case V_{DD} and $V_{IN}B$ are supplied by a single power source, V_{DD} & $V_{IN}B$, and GND are connected directly and separately from the output on the power source. If the common wire are used for V_{DD} & $V_{IN}B$, and for GND, and are split near the PCB, and connect to each LCD driving circuit and backlight driving circuit, a flicker might be occurred due to a ripple between the both circuit.

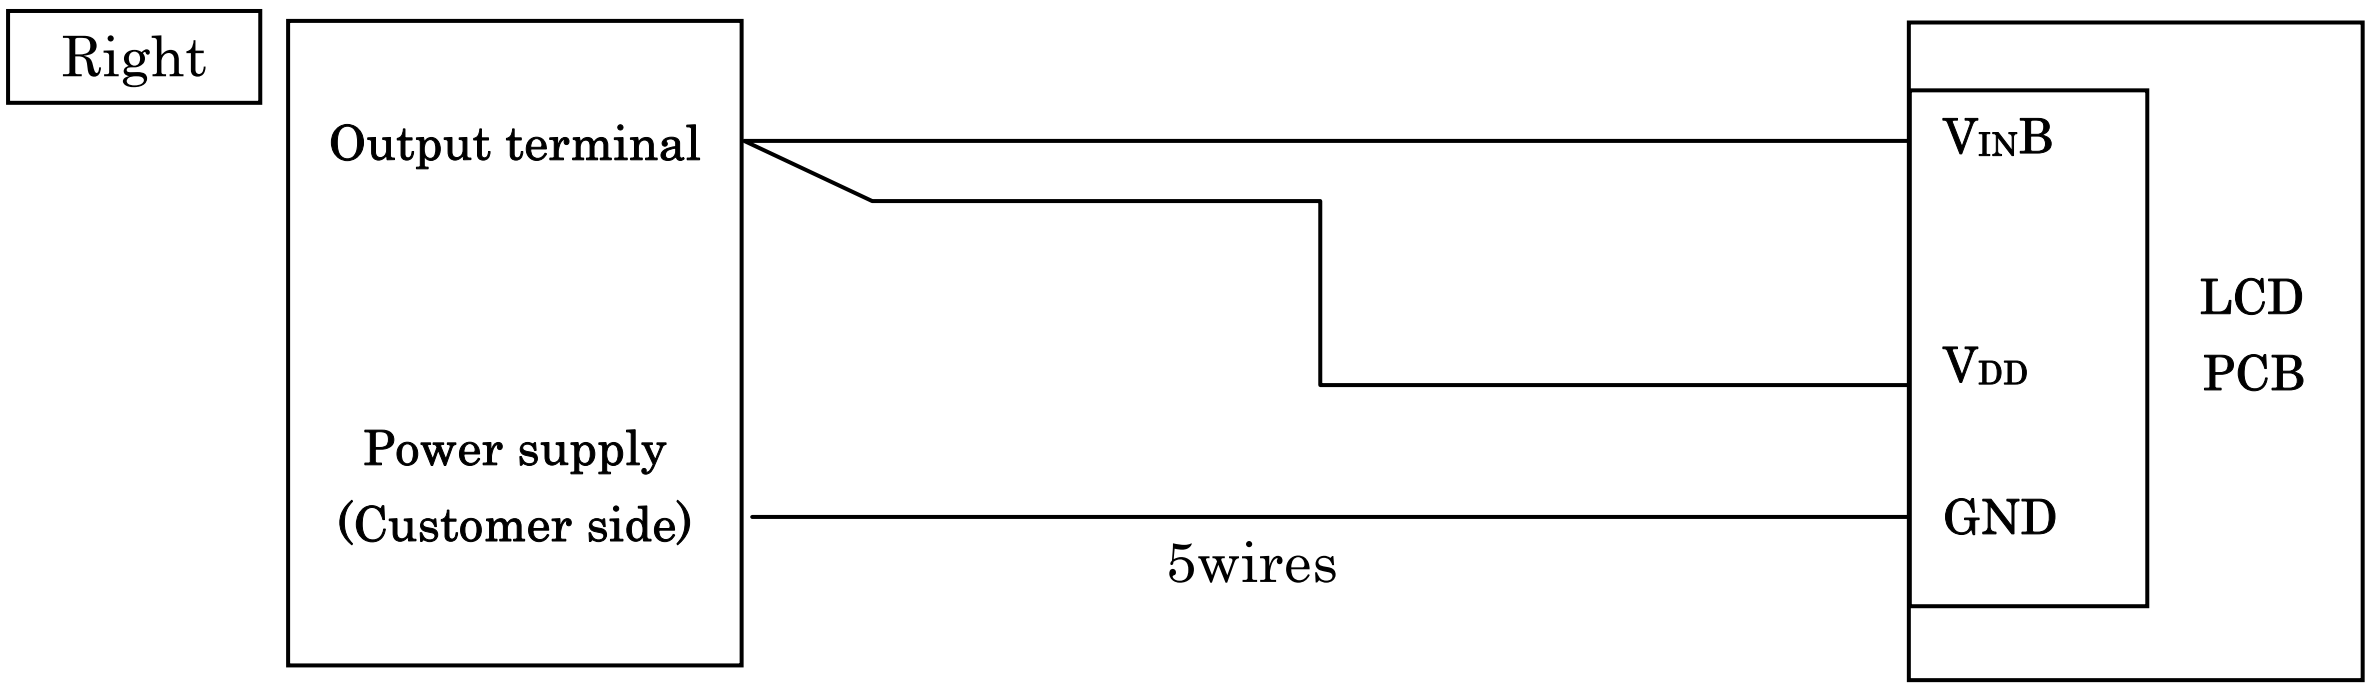

Right
Output terminal
Power supply
(Customer side)
5wires
VINB
VDD
GND
LCD
PCB

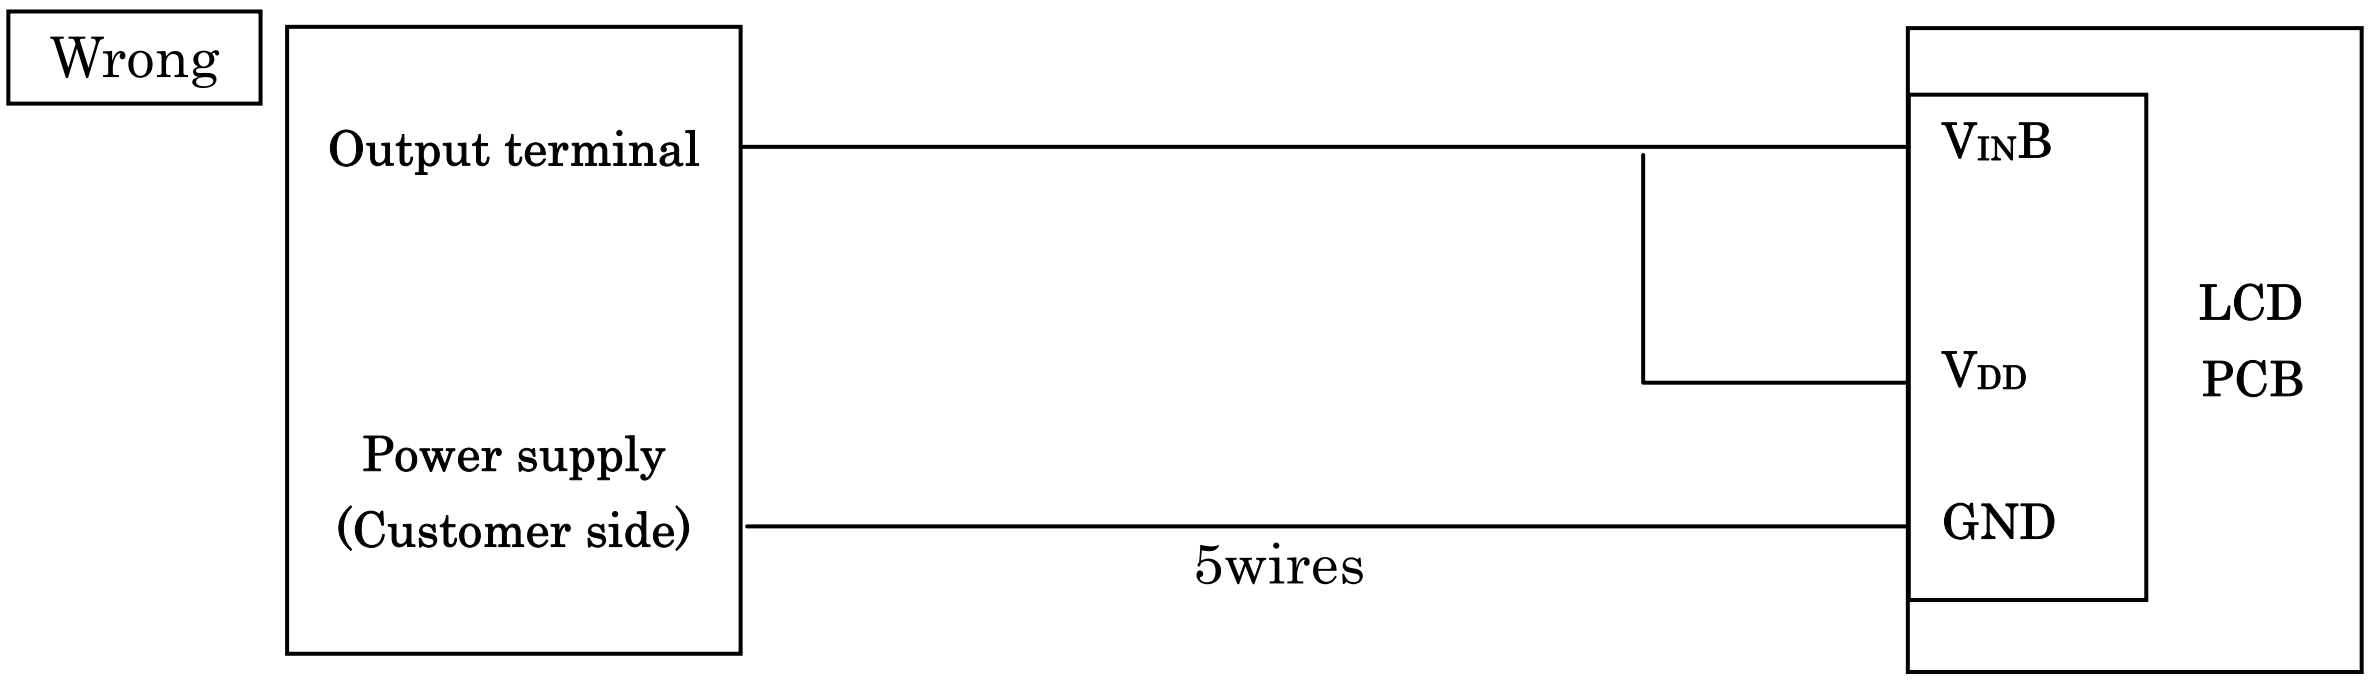

Wrong
Output terminal
Power supply
(Customer side)
5wires
VINB
VDD
GND
LCD
PCB

8) VBRT-IF characteristics

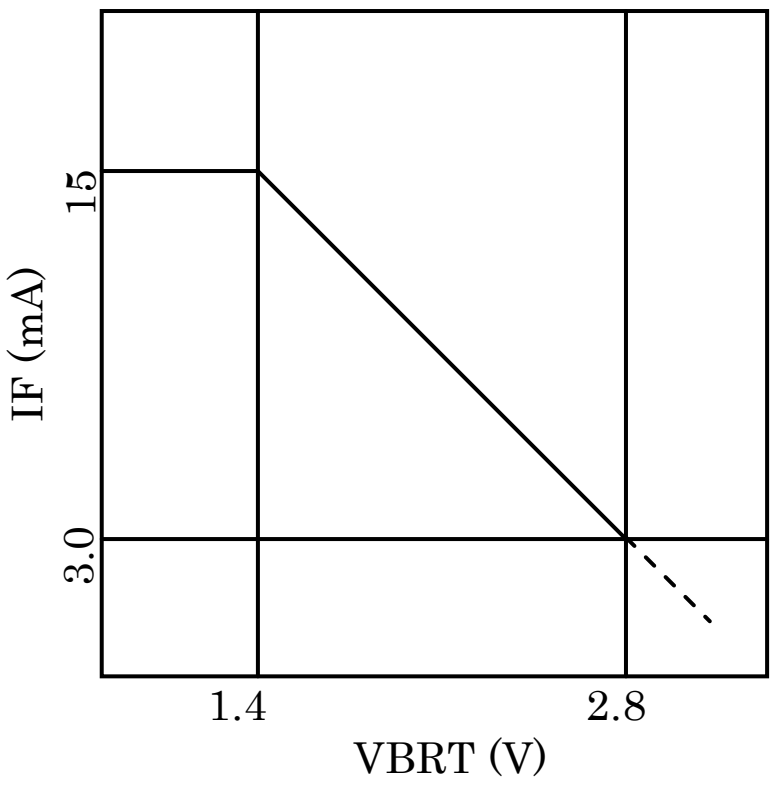

6. Optical characteristics

Measuring spot = ϕ 6.0mm, Temp. = 25°C

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Response time	Rise	τ_r	$\theta=\phi=0^\circ$	-	15	-	ms
	Down	τ_d	$\theta=\phi=0^\circ$	-	20	-	ms
Viewing angle range View direction : 6 o'clock (Gray inversion)		θ UPPER	CR≧5	-	80	-	deg.
		θ LOWER		-	80	-	
		ϕ LEFT		-	80	-	deg.
		ϕ RIGHT		-	80	-	
Contrast ratio		CR	$\theta=\phi=0^\circ$	300	500	-	-
Brightness		L	IF=15mA/Line	175	250	-	cd/m^2
Chromaticity coordinates	Red	x	$\theta=\phi=0^\circ$	0.55	0.60	0.65	-
		y		0.31	0.36	0.41	
	Green	x	$\theta=\phi=0^\circ$	0.29	0.34	0.39	
		y		0.54	0.59	0.64	
	Blue	x	$\theta=\phi=0^\circ$	0.10	0.15	0.20	
		y		0.07	0.12	0.17	
	White	x	$\theta=\phi=0^\circ$	0.27	0.32	0.37	
		y		0.29	0.34	0.39	

6-1. Definition of contrast ratio

$$\text{CR(Contrast ratio)} = \frac{\text{Brightness with all pixels "White"}}{\text{Brightness with all pixels "Black"}}$$

6-2. Definition of response time

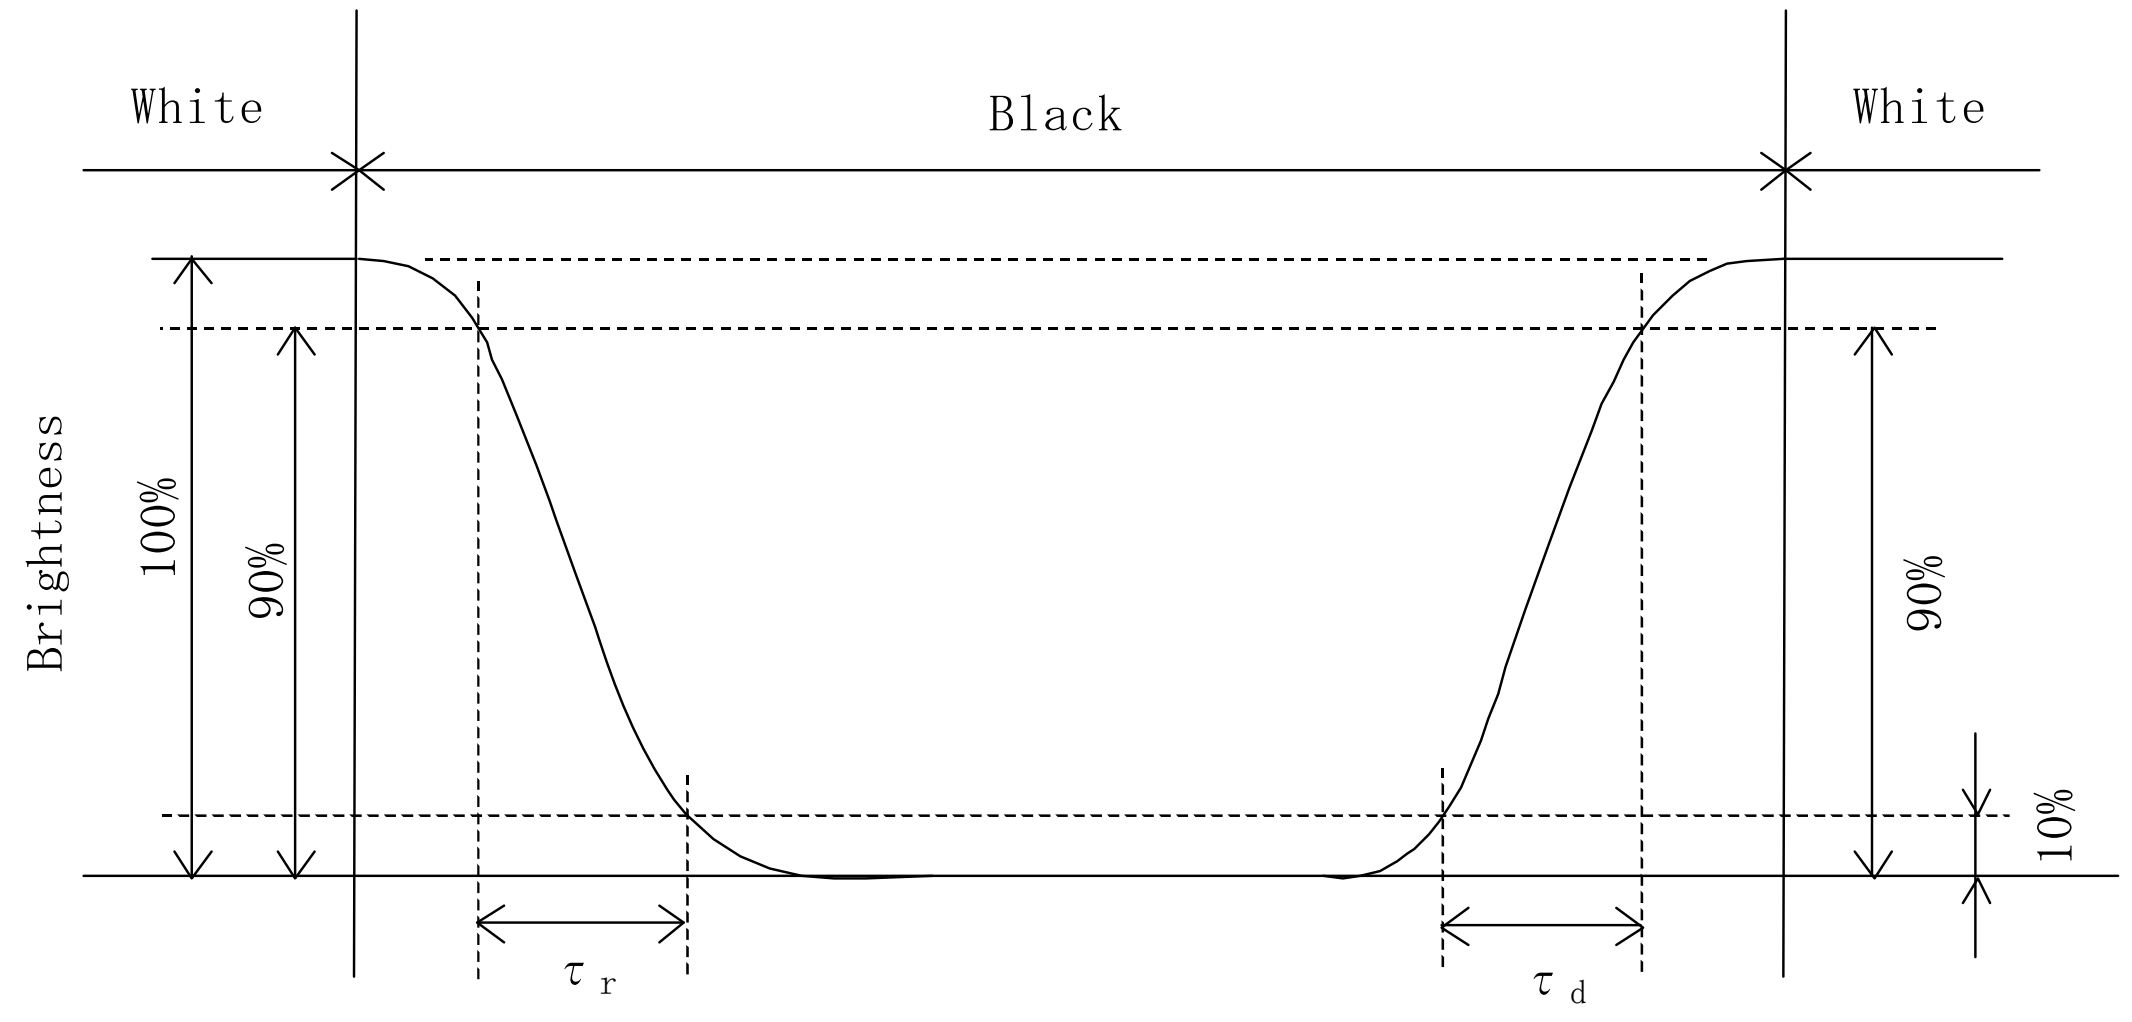

6-3. Definition of viewing angle

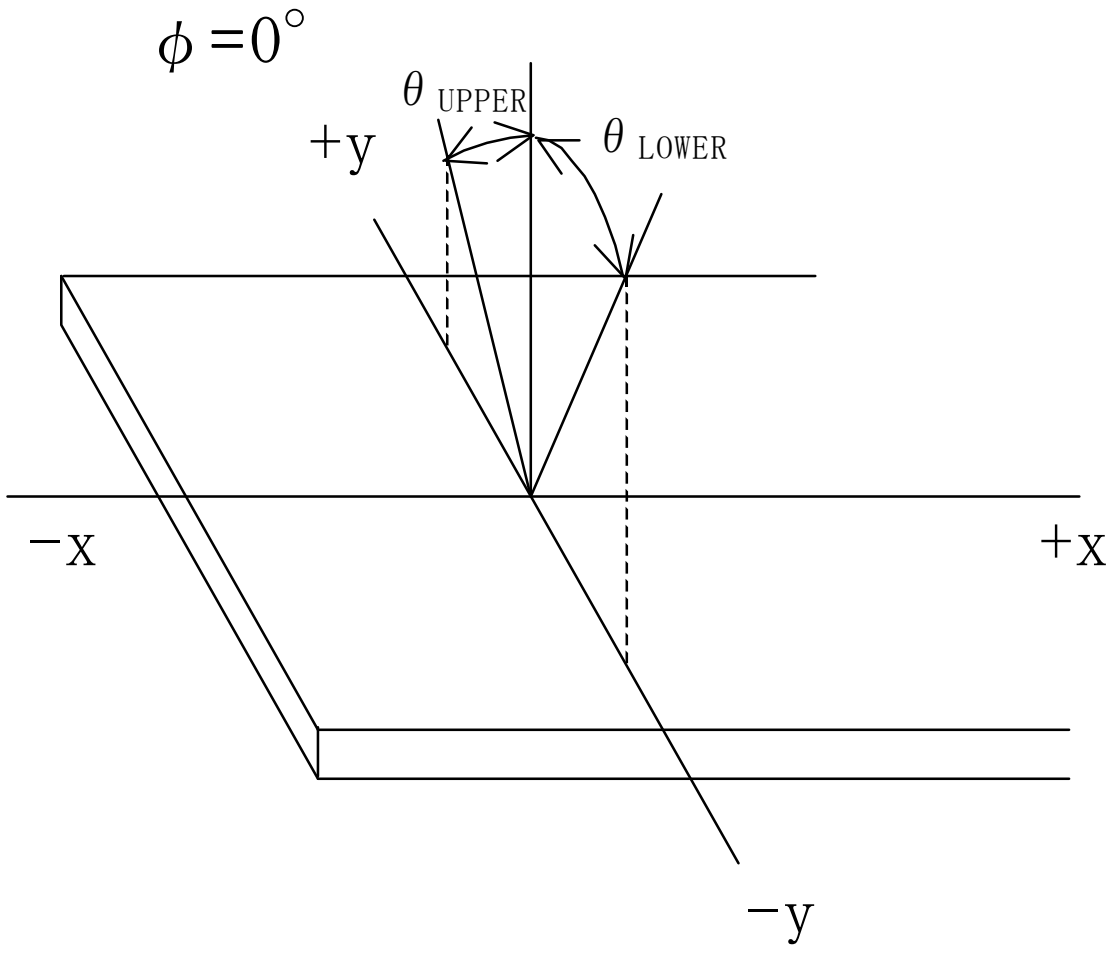

$\phi=0°$
θ UPPER
θ LOWER
+y
−x
+x
−y

θ direction

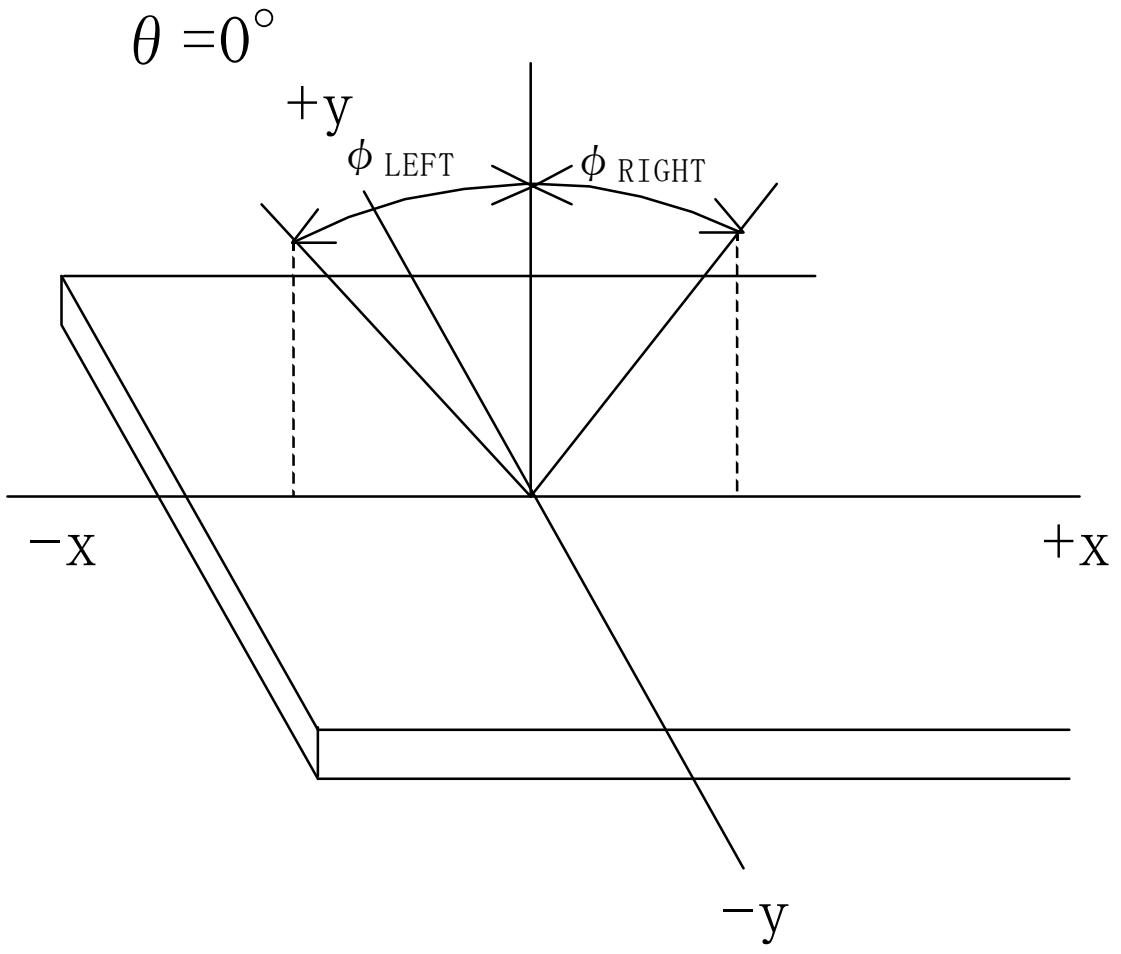

$\theta=0°$
+y
ϕ LEFT
ϕ RIGHT
−x
+x
−y

ϕ direction

6-4. Brightness measuring points

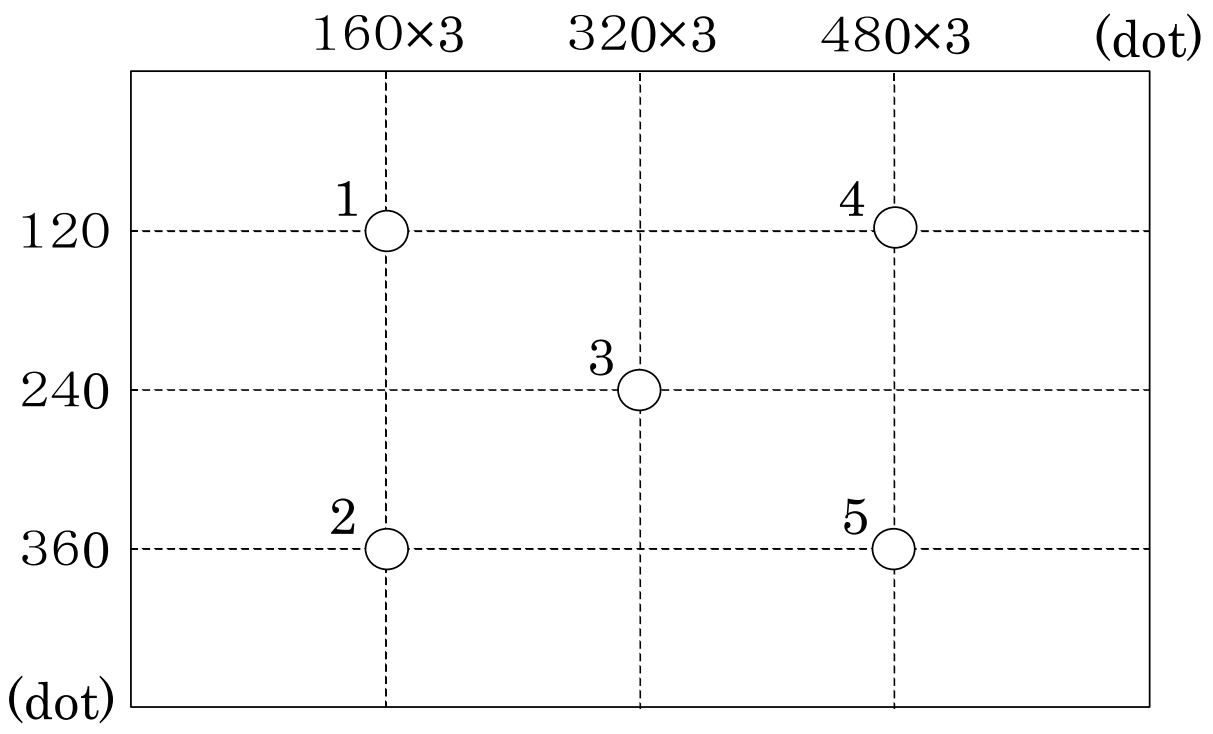

160×3
320×3
480×3
(dot)
120
240
360
(dot)
1
2
3
4
5

1) Rating is defined on the average in the viewing area. (measured point 1～5)
2) Measured 5 minutes after the LED is powered on. (Ambient temp. = 25°C)

7. Interface signals

Pin No.	Symbol	Description	I/O	Note
1	V_{DD}	+3.3V power supply	-	-
2	V_{DD}	+3.3V power supply	-	-
3	GND	GND	-	-
4	DPS	Scan direction control	I	1)
5	RxIN0-	LVDS receiver signal CH0(-)	I	4)
6	RxIN0+	LVDS receiver signal CH0(+)	I	4)
7	GND	GND	-	-
8	RxIN1-	LVDS receiver signal CH1(-)	I	4)
9	RxIN1+	LVDS receiver signal CH1(+)	I	4)
10	GND	GND	-	-
11	RxIN2-	LVDS receiver signal CH2(-)	I	4)
12	RxIN2+	LVDS receiver signal CH2(+)	I	4)
13	GND	GND	-	-
14	CK IN-	LVDS receiver signal CK(-)	I	-
15	CK IN+	LVDS receiver signal CK(+)	I	-
16	GND	GND	-	-
17	$V_{IN}B$	Power supply (Backlight)	-	-
18	$V_{IN}B$	Power supply (Backlight)	-	-
19	BLEN	ON/OFF terminal voltage	I	2)
20	VBRT	Analog dimming	I	3)

LCD connector	:	DF19G-20P-1H(54)	(HIROSE)
Recommended matching connector	:	DF19-20S-1C	(HIROSE)

1) DSP Pin

① Open or High



② Low



2) BLEN Pin
① Open or High : Backlight ON
② Low : Backlight OFF

3) VBRT Pin
① Open : IF=Typ.15mA/Line
② 0～1.4V : IF=Typ.15mA/Line
③ 1.4V～2.8V : IF=Typ.15mA/Line～3mA/Line

4) MSB: R5, G5, B5 LSB: R0, G0, B0

8. Input timing characteristics

8-1. Timing characteristics

Item		Symbol	Min.	Typ.	Max.	Unit
Clock (CK)	Frequency	$1/T_{Clock}$	20	25.2	28.33	MHz
Vertical	Period	T_V	520	525	560	T_H
	Display period	T_{VD}	-	480	-	
	Blank period	T_{VB}	40	45	80	
Horizontal	Period	T_H	770	800	900	T_{Clock}
	Display period	T_{HD}	-	640	-	
	Blank period	T_{HB}	130	160	260	

1） Frame frequency 60Hz.

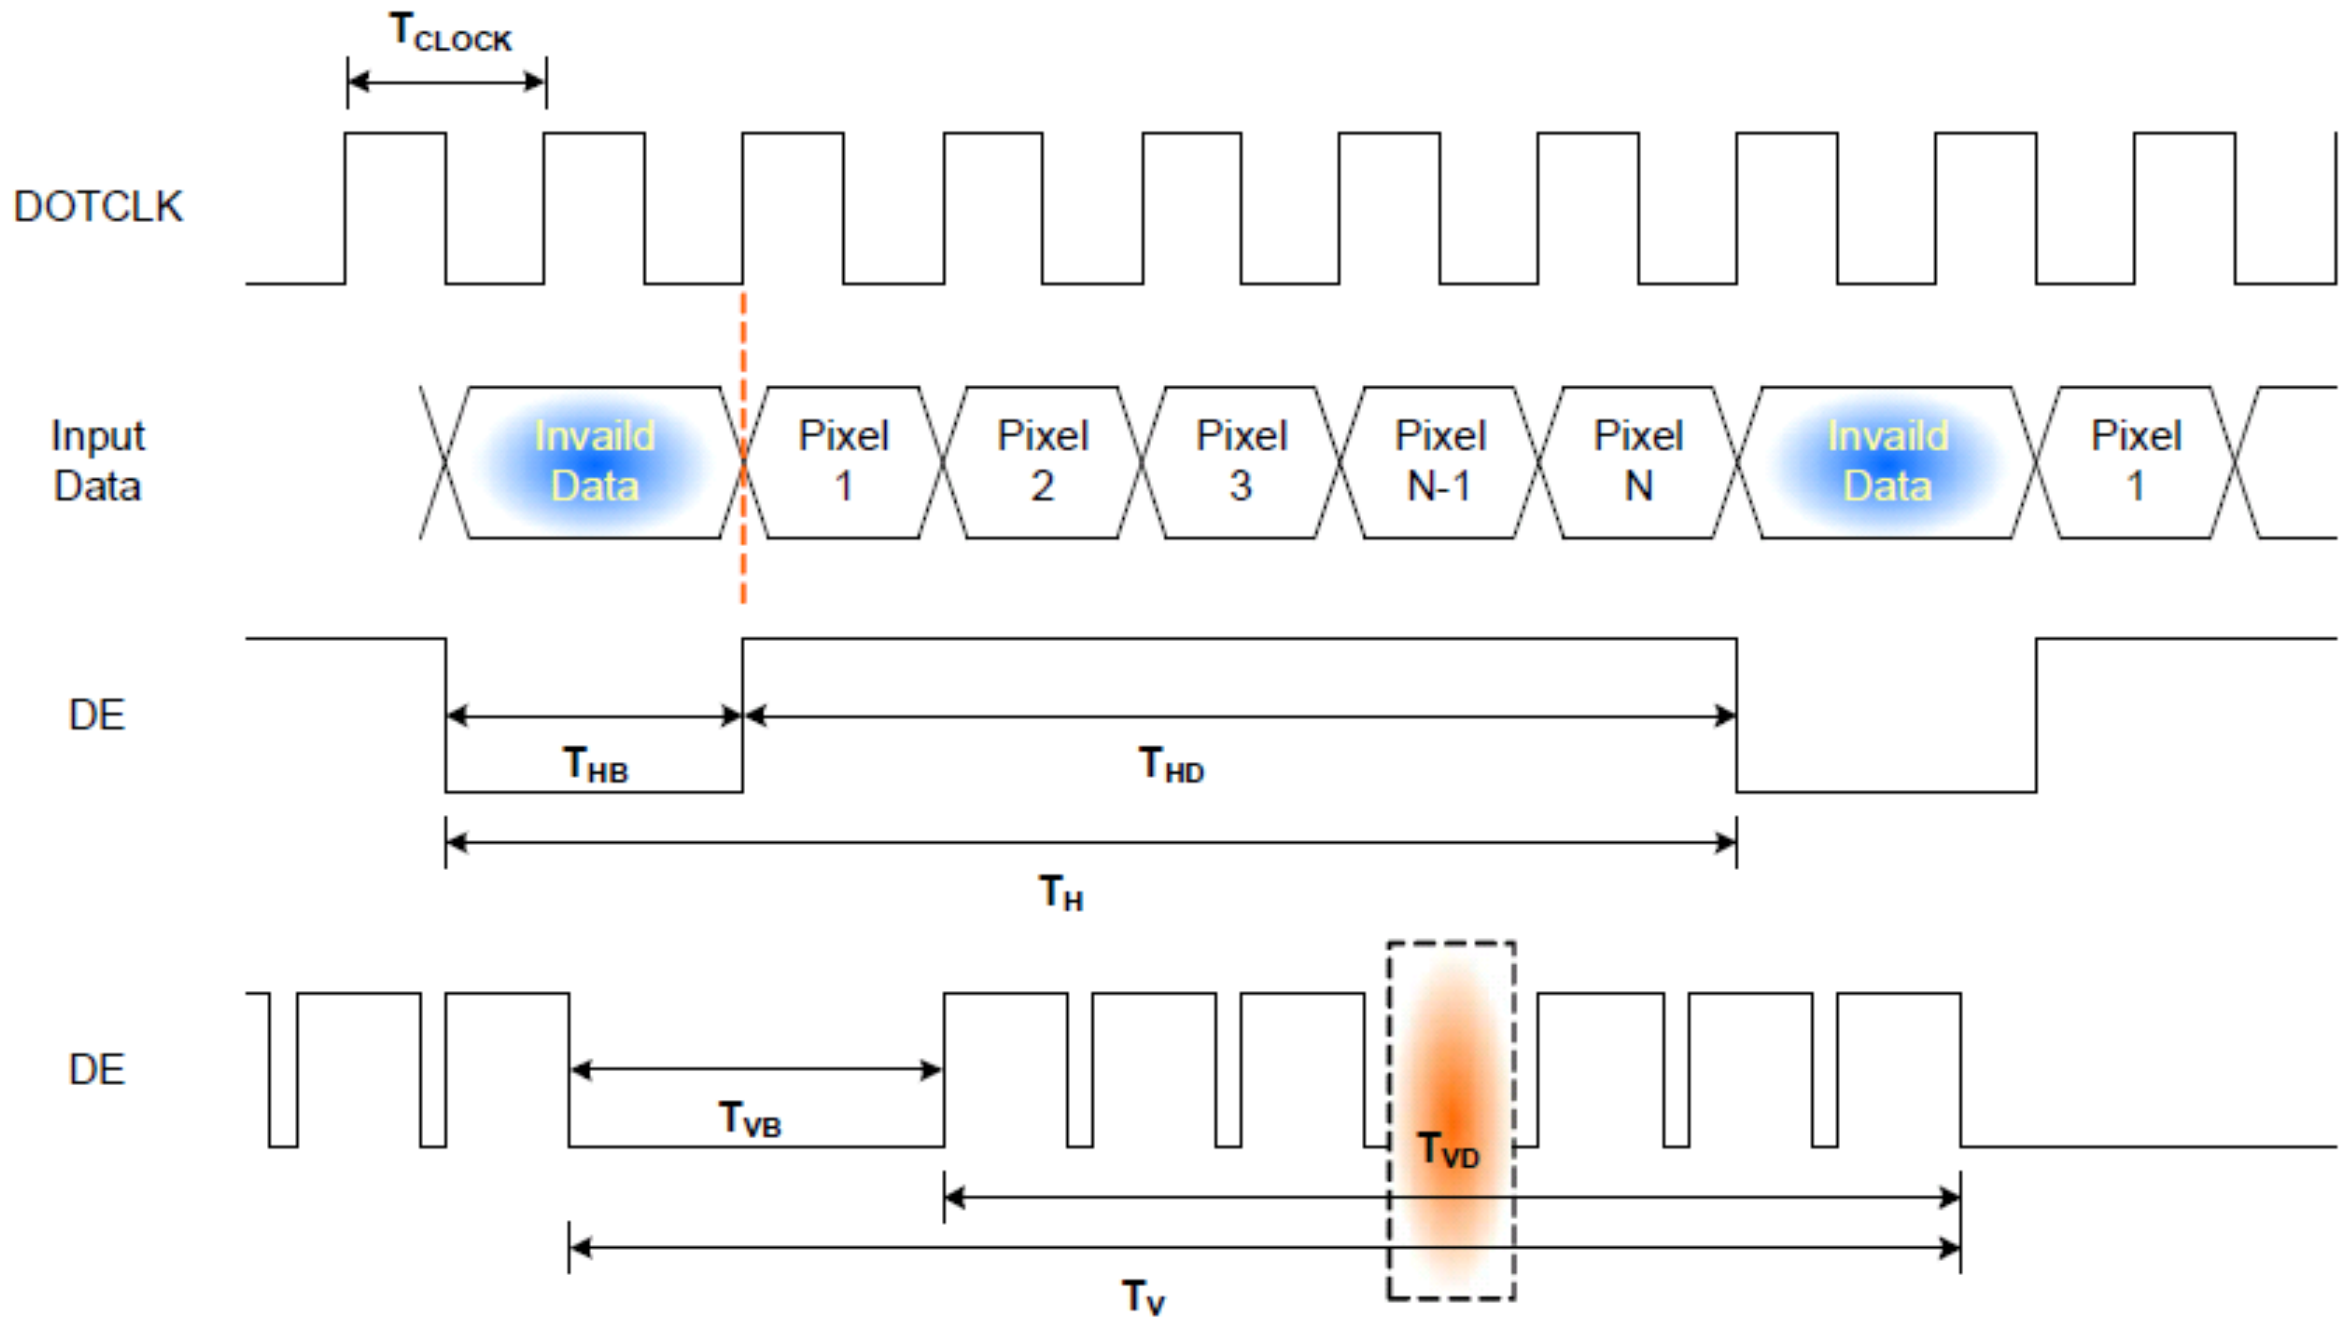
TCLOCK
DOTCLK
Input Data
Invaild Data
Pixel 1
Pixel 2
Pixel 3
Pixel N-1
Pixel N
Invaild Data
Pixel 1
DE
THB
THD
TH
DE
TVB
TVD
TV

8-2. Data mapping

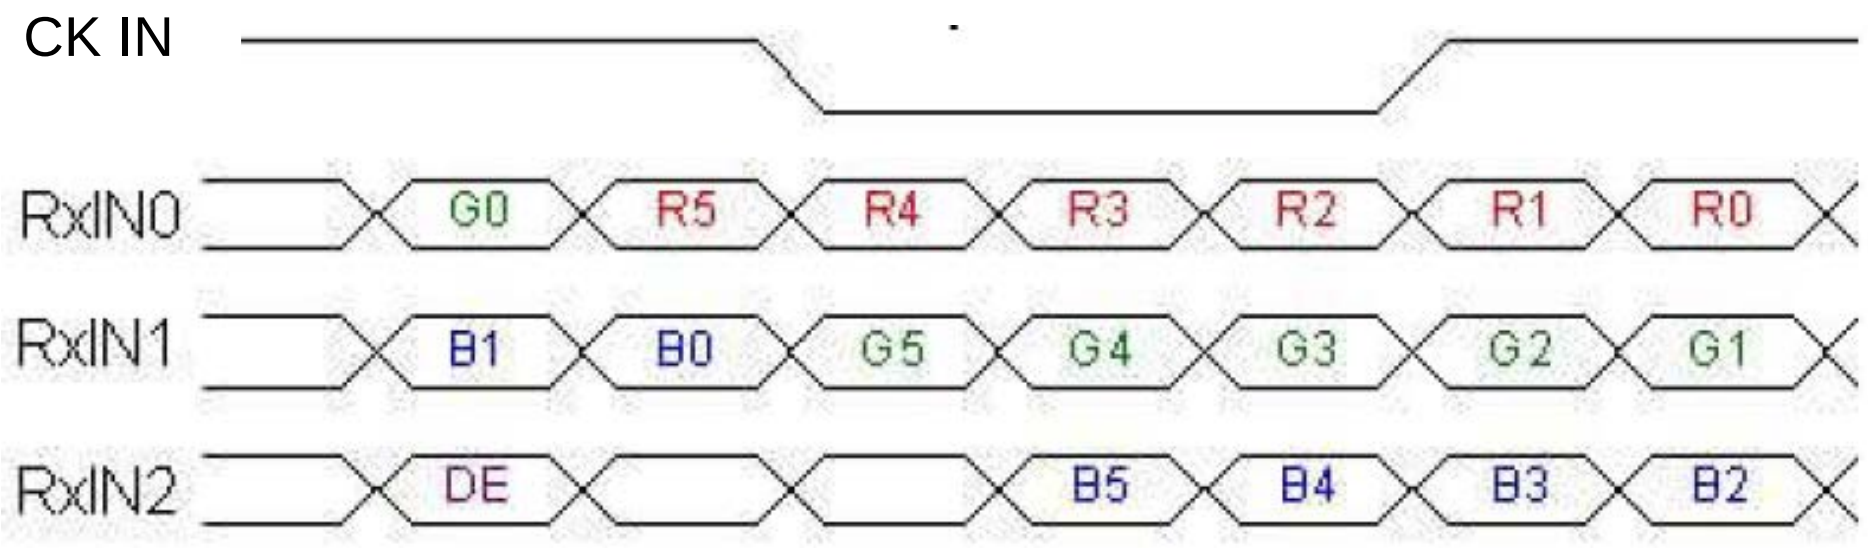
CK IN
RxIN0
G0
R5
R4
R3
R2
R1
R0
RxIN1
B1
B0
G5
G4
G3
G2
G1
RxIN2
DE
B5
B4
B3
B2

8-3. Input Data Signals and Display position on the screen

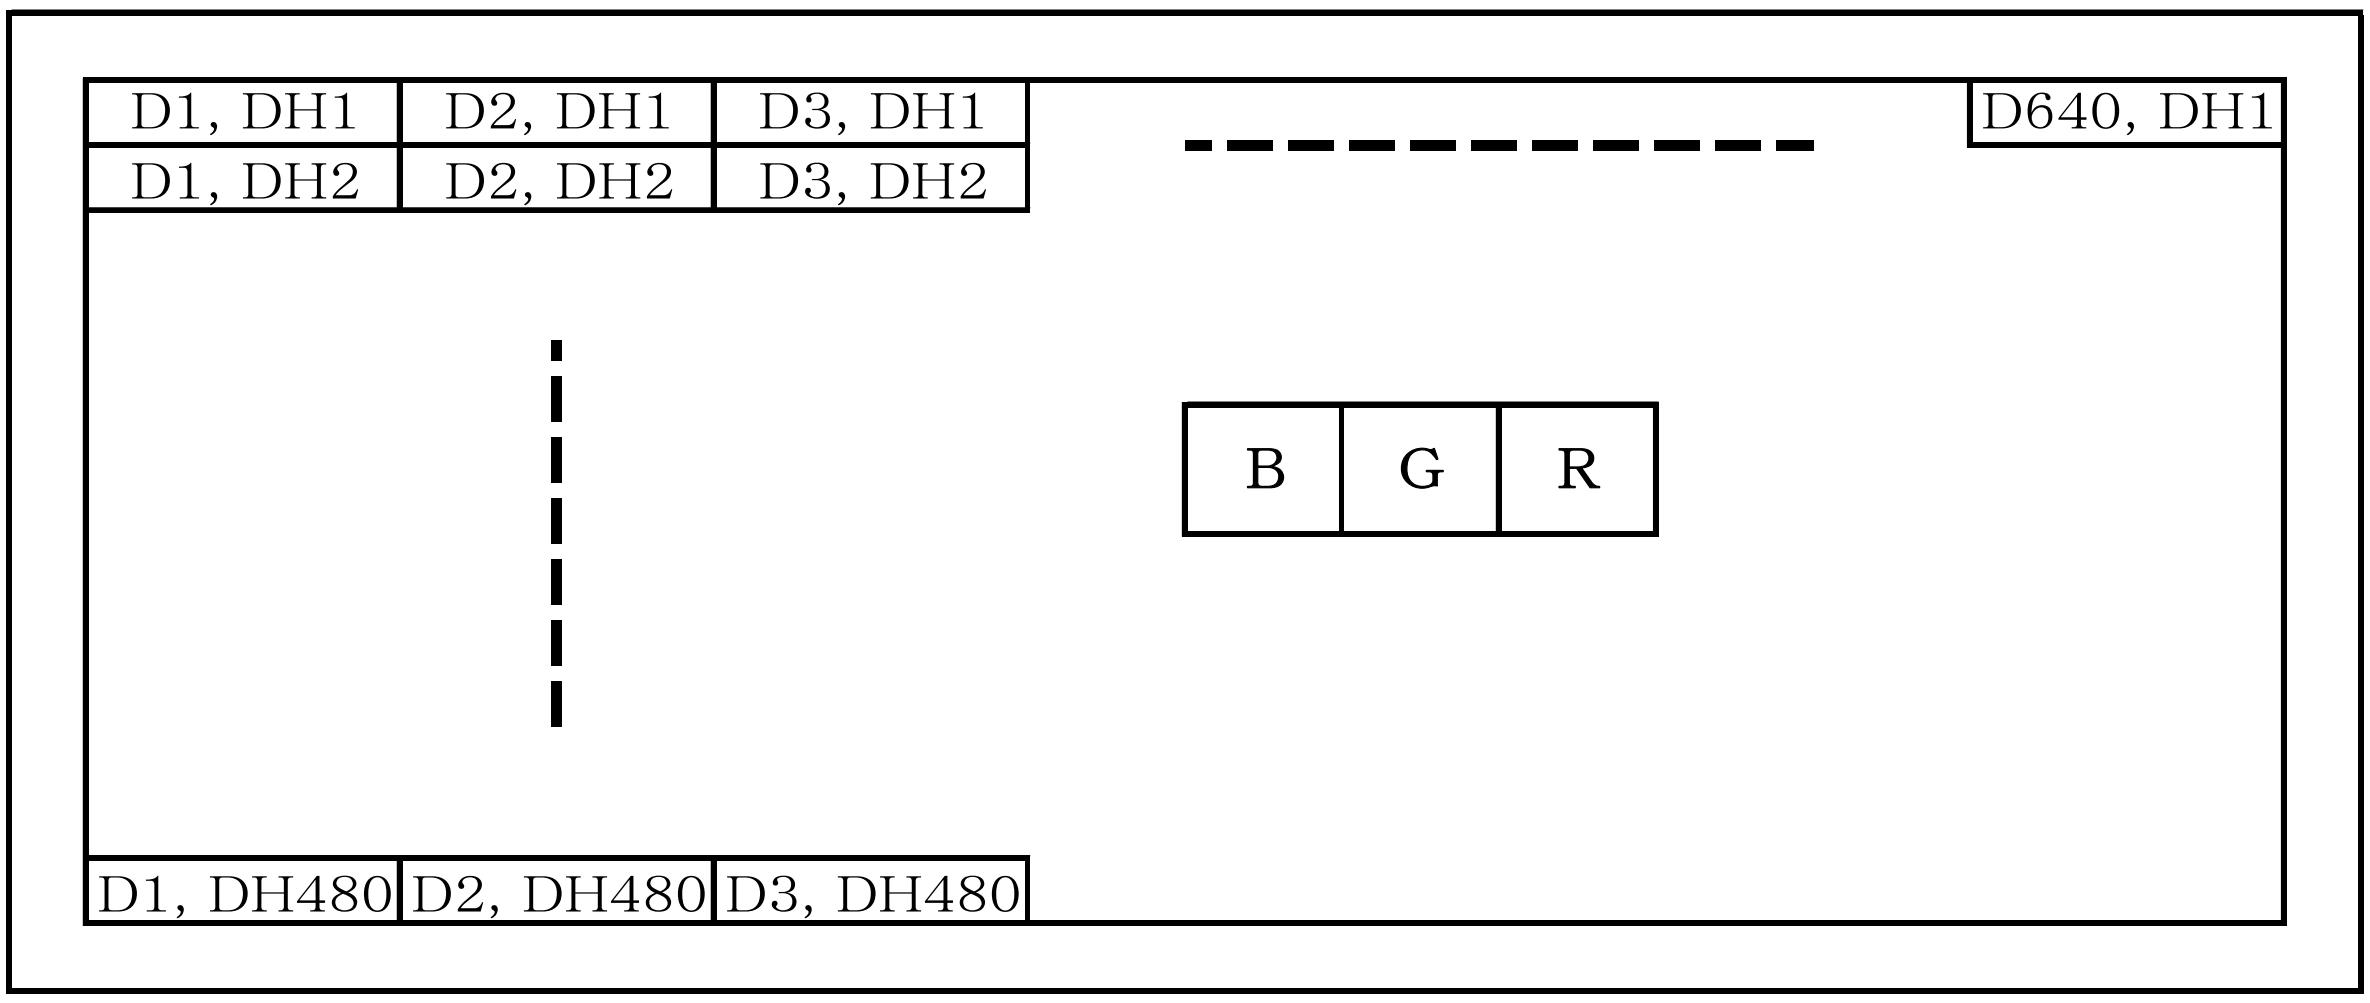
D1, DH1
D2, DH1
D3, DH1
D640, DH1
D1, DH2
D2, DH2
D3, DH2
B
G
R
D1, DH480
D2, DH480
D3, DH480

9. Lot number identification

The lot number shall be indicated on the back of the backlight case of each LCD.

```
TCG075VGLDH-G20   - □□ - □□ - □   MADE IN  □□□□□
                    ↓↓    ↓    ↓              ↓
                    1 2   3    4              5
```

No1. - No5. above indicate
1. Year code
2. Month code
3. Date
4. Version Number
5. Country of origin (Japan or China)

Year	2016	2017	2018	2019	2020	2021
Code	6	7	8	9	0	1

Month	Jan.	Feb.	Mar.	Apr.	May	Jun.
Code	1	2	3	4	5	6

Month	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Code	7	8	9	X	Y	Z

10. Warranty

10-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

10-2. Production warranty

Kyocera warrants its LCD's for a period of 12 months from the ship date. Kyocera shall, by mutual agreement, replace or re-work defective LCD's that are shown to be Kyocera's responsibility.

11. Precautions for use

11-1. Installation of the LCD

1) A transparent protection plate shall be added to protect the LCD and its polarizer
2) The LCD shall be installed so that there is no pressure on the LSI chips.
3) The LCD shall be installed flat, without twisting or bending.
4) Please design the housing window so that its edges are between the active area and the effective area of the LCD screen.
5) A transparent protection sheet is attached to the polarizer. Please remove the protection film slowly before use, paying attention to static electricity.

11-2. Static electricity

1) Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required.
2) Workers should use body grounding. Operator should wear ground straps.

11-3. LCD operation

1) The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.

11-4. Storage

1) The LCD shall be stored within the temperature and humidity limits specified. Store in a dark area, and protect the LCD from direct sunlight or fluorescent light.
2) Always store the LCD so that it is free from external pressure onto it.

11-5. Usage

1) DO NOT store in a high humidity environment for extended periods. Polarizer degradation bubbles, and/or peeling off of the polarizer may result.
2) The front polarizer is easily scratched or damaged. Prevent touching it with any hard material, and from being pushed or rubbed.
3) The LCD screen may be cleaned by wiping the screen surface with a soft cloth or cotton pad using a little Ethanol.
4) Water may cause damage or discoloration of the polarizer. Clean condensation or moisture from any source immediately.
5) Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizer.
6) Do not disassemble LCD because it will result in damage.
7) This Kyocera LCD has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.
8) Please do not use solid-base image pattern for long hours because a temporary afterimage may appear. We recommend using screen saver etc. in cases where a solid-base image pattern must be used.
9) Liquid crystal may leak when the LCD is broken. Be careful not to let the fluid go into your eyes and mouth. In the case the fluid touches your body; rinse it off right away with water and soap.

12. Reliability test data

Test item	Test condition	Test time	Judgement
High temp. atmosphere	80°C	240h	Display function : No defect Display quality : No defect Current consumption : No defect
Low temp. atmosphere	-30°C	240h	Display function : No defect Display quality : No defect Current consumption : No defect
High temp. humidity atmosphere	40°C 90% RH	240h	Display function : No defect Display quality : No defect Current consumption : No defect
Temp. cycle	-30°C 0.5h R.T. 0.5h 80°C 0.5h	10cycles	Display function : No defect Display quality : No defect Current consumption : No defect
High temp. operation	70°C	500h	Display function : No defect Display quality : No defect Current consumption : No defect

1) Each test item uses a test LCD only once. The tested LCD is not used in any other tests.
2) The LCD is tested in circumstances in which there is no condensation.
3) The reliability test is not an out-going inspection.
4) The result of the reliability test is for your reference purpose only.
The reliability test is conducted only to examine the LCD's capability.

No	Description	Drawn	Checked	Checked	Approved

TENTATIVE

It is possible to change some dimensions.
（本図記載の形状・及び寸法値は変更の可能性があります）

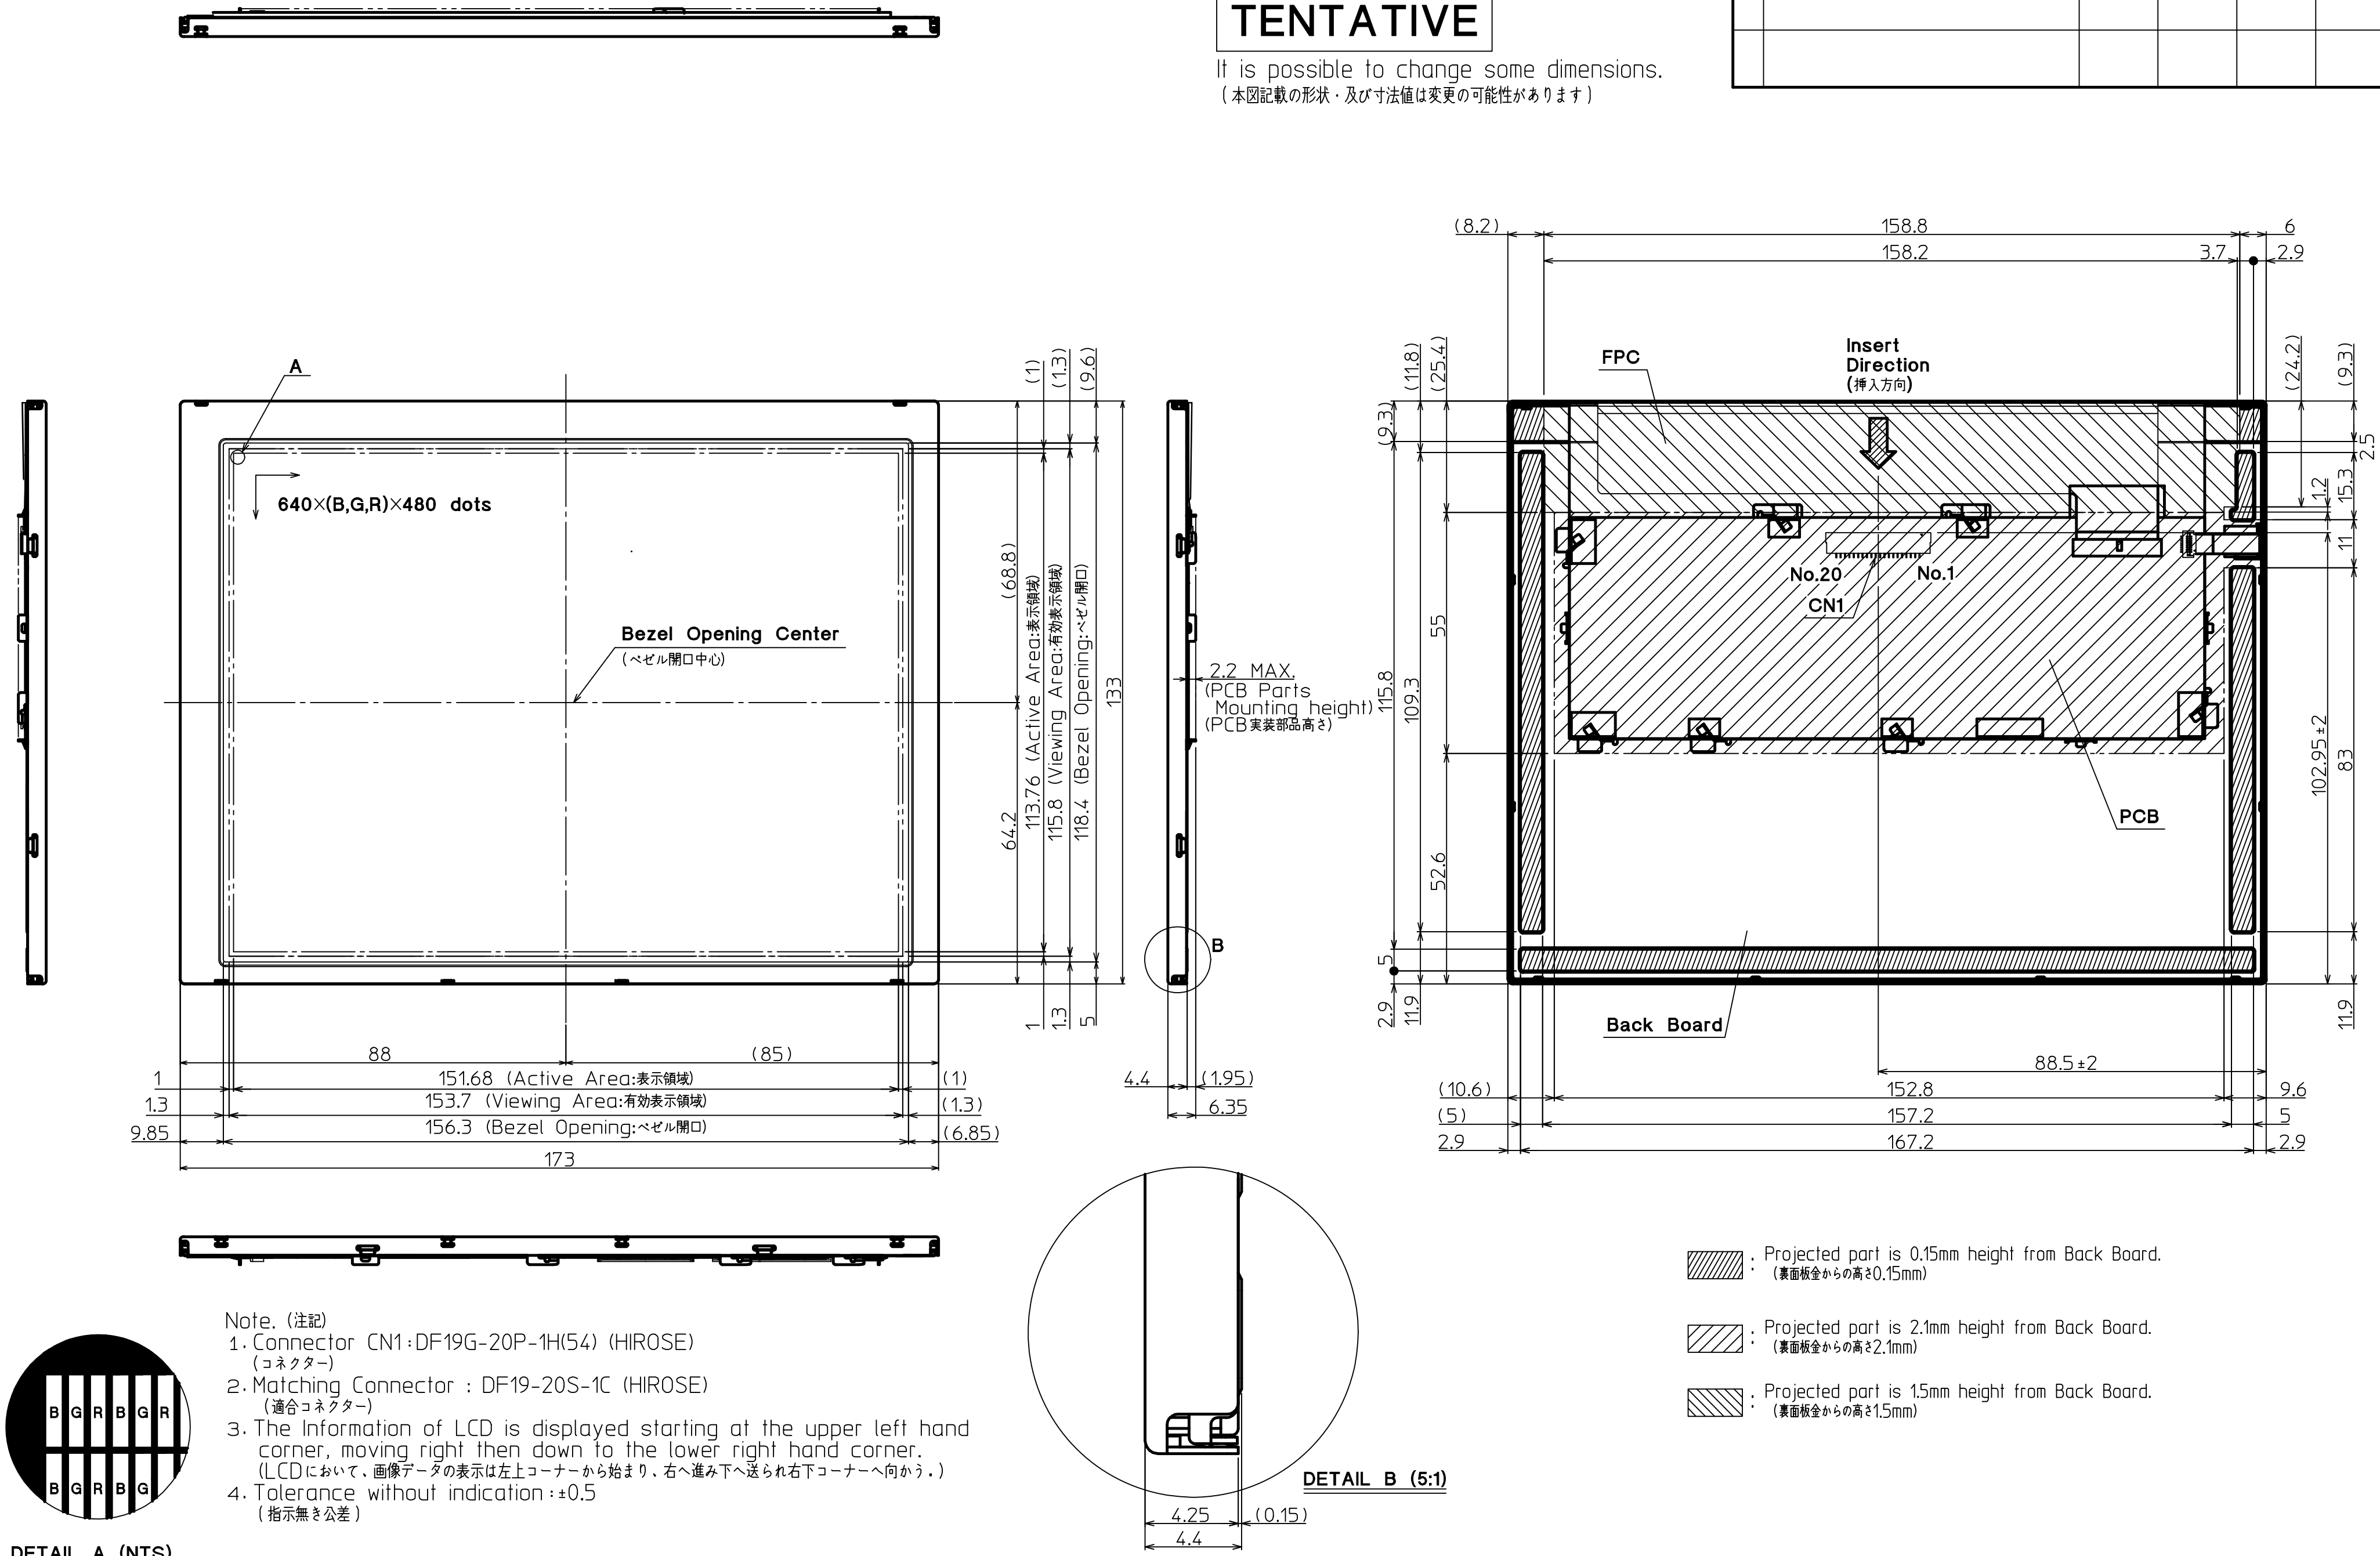
A
640×(B,G,R)×480 dots
Bezel Opening Center
(ベゼル開口中心)
113.76 (Active Area:表示領域)
115.8 (Viewing Area:有効表示領域)
118.4 (Bezel Opening:ベゼル開口)
133
64.2
(68.8)
(1)
(1.3)
(9.6)
1
1.3
5
88
(85)
151.68 (Active Area:表示領域)
153.7 (Viewing Area:有効表示領域)
156.3 (Bezel Opening:ベゼル開口)
173
9.85
(6.85)
2.2 MAX.
(PCB Parts Mounting height)
(PCB実装部品高さ)
4.4
(1.95)
6.35
B
FPC
Insert Direction
(挿入方向)
No.20
No.1
CN1
PCB
Back Board
(8.2)
158.8
158.2
6
3.7
2.9
(11.8)
(25.4)
(9.3)
(24.2)
2.5
15.3
1.2
11
55
115.8
109.3
52.6
5
2.9
11.9
102.95±2
83
88.5±2
(10.6)
152.8
9.6
(5)
157.2
167.2
DETAIL A (NTS)
(Dot Size)
B G R B G R
B G R B G
DETAIL B (5:1)
4.25
(0.15)
4.4

▨ : Projected part is 0.15mm height from Back Board.
（裏面板金からの高さ0.15mm）

▨ : Projected part is 2.1mm height from Back Board.
（裏面板金からの高さ2.1mm）

▧ : Projected part is 1.5mm height from Back Board.
（裏面板金からの高さ1.5mm）

Note.（注記）
1. Connector CN1 : DF19G-20P-1H(54) (HIROSE)
（コネクター）
2. Matching Connector : DF19-20S-1C (HIROSE)
（適合コネクター）
3. The Information of LCD is displayed starting at the upper left hand corner, moving right then down to the lower right hand corner.
（LCDにおいて、画像データの表示は左上コーナーから始まり、右へ進み下へ送られ右下コーナーへ向かう。）
4. Tolerance without indication : ±0.5
（指示無き公差）

Material 材質	Treatment 処理	Approved	Checked	Checked	Drawn	Scale	Title			Year-Month-Day	Size
		'11.01.20		'11.01.20		1:1(5:1,NTS)	TCG075VGLDH	F06A	KYOCERA	'11.01.17	2
Quantity 製作数	Description; 備考 RoHS	徳森		今村	木口		Outline Dimensions		Drawing No. 121A8041300		

Spec No.	TQ3C-8EAF0-E2DEX127-00
Date	October 13, 2016

KYOCERA INSPECTION STANDARD

TYPE : TCG075VGLDH-G20

KYOCERA DISPLAY CORPORATION

Original Issue Date	Designed by : Engineering dept.			Confirmed by : QA dept.	
	Prepared	Checked	Approved	Checked	Approved
October 13, 2016	M. Koyama	T. Onodera	Y. Matsumoto	O. Sato	I. Hama

Revision record

Date	Designed by : Engineering dept.			Confirmed by : QA dept.	
	Prepared	Checked	Approved	Checked	Approved

Rev.No.	Date	Page	Descriptions

Visuals specification

1) Note

	Note		
General	1. Customer identified anomalies not defined within this inspection standard shall be reviewed by Kyocera, and an additional standard shall be determined by mutual consent. 2. This inspection standard about the image quality shall be applied to any defect within the effective active area and shall not be applicable to outside of the area. 3. Inspection conditions Luminance : 500 Lux min. Inspection distance : 300 mm. Temperature : 25 ± 5℃ Direction : Directly above		
Definition of inspection item	Dot defect	Bright dot defect	The dot is constantly "on" when power applied to the LCD, even when all "Black" data sent to the screen. Inspection tool: 5% Transparency neutral density filter. Count dot: If the dot is visible through the filter. Don't count dot: If the dot is not visible through the filter. 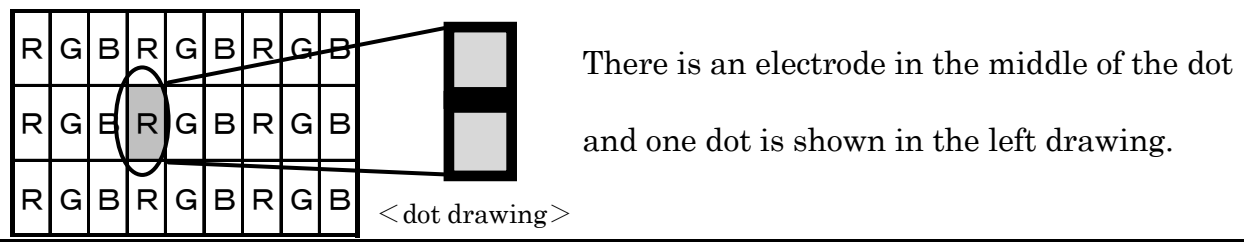 R G B R G B R G B R G B R G B R G B R G B R G B R G B ＜dot drawing＞ There is an electrode in the middle of the dot and one dot is shown in the left drawing.
		Black dot defect	The dot is constantly "off" when power applied to the LCD, even when all "White" data sent to the screen. Similar size compared to bright dot.
		White dot (Circular/foreign particle)	Pixel works electrically, however, circular/foreign particle makes dot appear to be "on" even when all "Black" data is sent to the screen.
		Adjacent dot	Adjacent dot defect is defined as two or more bright dot defects or black dot defects.  R G B R G B R G B R G B R G B R G B R G B R G B R G B dot defect
	External inspection	Bubble, Scratch, Foreign particle (Polarizer, Cell, Backlight)	Visible operating (all pixels "Black" or "White") and non operating.
		Appearance inspection	Does not satisfy the value at the spec.
	Definition of size	Definition of circle size  d =（a ＋ b）/2	Definition of linear size 

2) Standard

<table>
<tr><th colspan="2">Classification</th><th colspan="2">Inspection item</th><th>Judgement standard</th></tr>
<tr><td rowspan="7">Defect
(in LCD glass)</td><td rowspan="6">Dot defect</td><td colspan="2">Bright dot defect</td><td>Acceptable number : 4
Bright dot spacing : 5 mm or more</td></tr>
<tr><td colspan="2">Black dot defect</td><td>Acceptable number : 5
Black dot spacing : 5 mm or more</td></tr>
<tr><td rowspan="2">2 dot join</td><td>Bright dot defect</td><td>Acceptable number : 2</td></tr>
<tr><td>Black dot defect</td><td>Acceptable number : 3</td></tr>
<tr><td colspan="2">3 or more dots join</td><td>Acceptable number : 0</td></tr>
<tr><td colspan="2">Total dot defects</td><td>Acceptable number : 5 Max</td></tr>
<tr><td>Others</td><td colspan="2">White dot, Dark dot
(Circle)</td><td>
<table>
<tr><th>Size (mm)</th><th>Acceptable number</th></tr>
<tr><td>d ≦ 0.2</td><td>(Neglected)</td></tr>
<tr><td>0.2 ＜ d ≦ 0.4</td><td>5</td></tr>
<tr><td>0.4 ＜ d ≦ 0.5</td><td>3</td></tr>
<tr><td>0.5 ＜ d</td><td>0</td></tr>
</table>
</td></tr>
<tr><td colspan="2" rowspan="5">External inspection
(Defect on Polarizer or between Polarizer and LCD glass)</td><td colspan="2">Polarizer (Scratch)</td><td>
<table>
<tr><th>Width (mm)</th><th>Length (mm)</th><th>Acceptable number</th></tr>
<tr><td>W ≦ 0.1</td><td>—</td><td>(Neglected)</td></tr>
<tr><td rowspan="2">0.1 ＜ W ≦ 0.3</td><td>L ≦ 5.0</td><td>(Neglected)</td></tr>
<tr><td>5.0 ＜ L</td><td>0</td></tr>
<tr><td>0.3 ＜ W</td><td>—</td><td>0</td></tr>
</table>
</td></tr>
<tr><td colspan="2">Polarizer (Bubble)</td><td>
<table>
<tr><th>Size (mm)</th><th>Acceptable number</th></tr>
<tr><td>d ≦ 0.2</td><td>(Neglected)</td></tr>
<tr><td>0.2 ＜ d ≦ 0.3</td><td>5</td></tr>
<tr><td>0.3 ＜ d ≦ 0.5</td><td>3</td></tr>
<tr><td>0.5 ＜ d</td><td>0</td></tr>
</table>
</td></tr>
<tr><td colspan="2">Foreign particle
(Circular shape)</td><td>
<table>
<tr><th>Size (mm)</th><th>Acceptable number</th></tr>
<tr><td>d ≦ 0.2</td><td>(Neglected)</td></tr>
<tr><td>0.2 ＜ d ≦ 0.4</td><td>5</td></tr>
<tr><td>0.4 ＜ d ≦ 0.5</td><td>3</td></tr>
<tr><td>0.5 ＜ d</td><td>0</td></tr>
</table>
</td></tr>
<tr><td colspan="2">Foreign particle
(Linear shape)
Scratch</td><td>
<table>
<tr><th>Width (mm)</th><th>Length (mm)</th><th>Acceptable number</th></tr>
<tr><td>W ≦ 0.03</td><td>—</td><td>(Neglected)</td></tr>
<tr><td rowspan="3">0.03 ＜ W ≦ 0.1</td><td>L ≦ 2.0</td><td>(Neglected)</td></tr>
<tr><td>2.0 ＜ L ≦ 4.0</td><td>3</td></tr>
<tr><td>4.0 ＜ L</td><td>0</td></tr>
<tr><td>0.1 ＜ W</td><td>—</td><td>(According to circular shape)</td></tr>
</table>
</td></tr>
<tr><td colspan="2">Color variation
(Mura)</td><td>Not to be significantly visible.
Consultation shall be held as necessary.</td></tr>
</table>