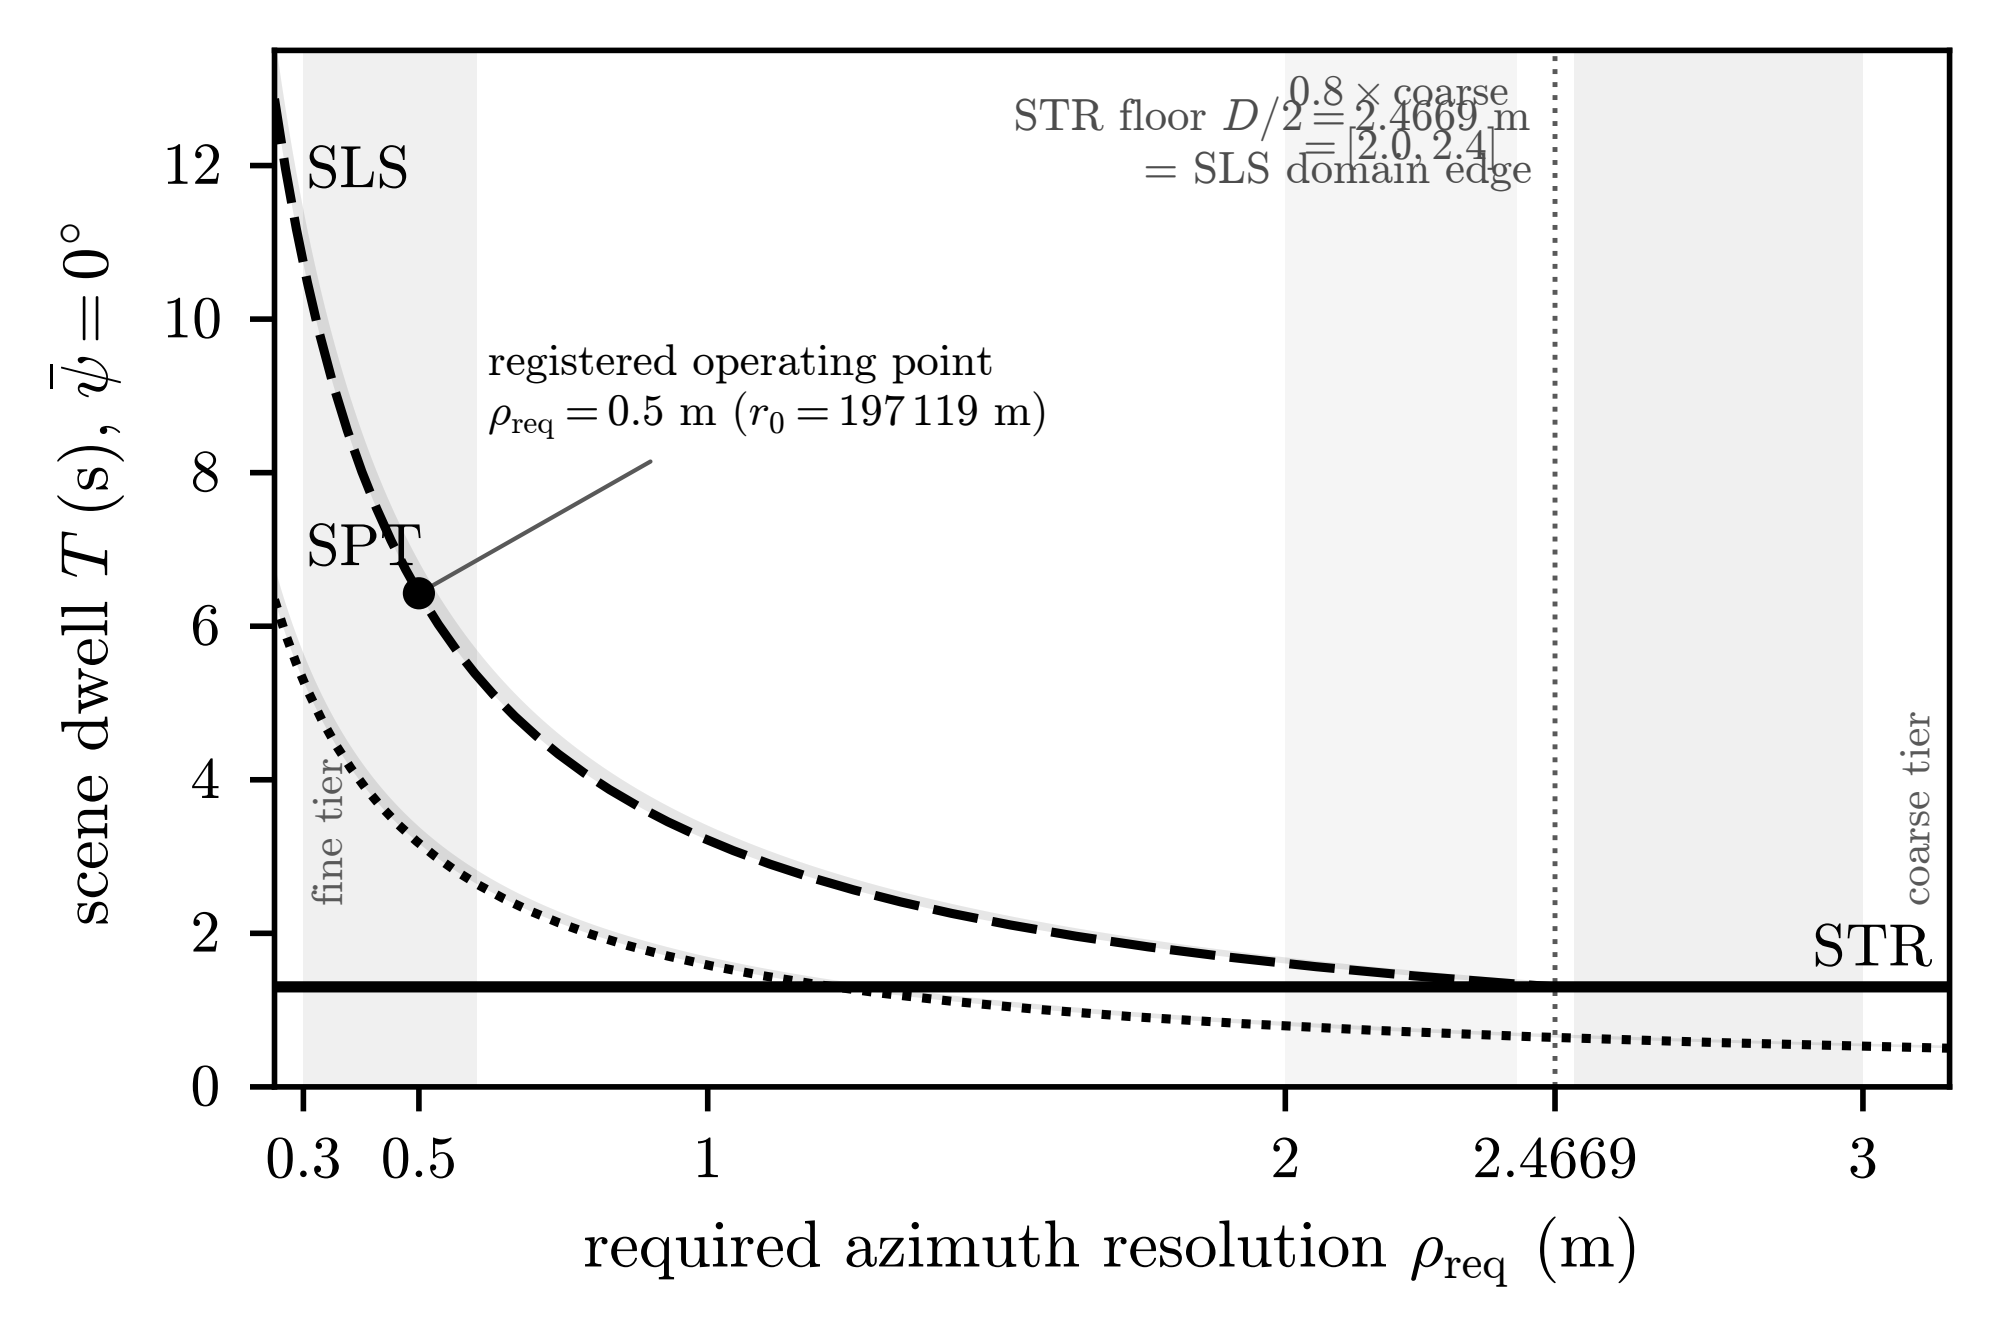
SLS
SPT
STR
registered operating point
$\rho_{\mathrm{req}} = 0.5$ m ($r_0 = 197\,119$ m)
0.8 × coarse
STR floor $D/2 = 2.4669$ m
= [2.0, 2.4]
= SLS domain edge
fine tier
coarse tier
scene dwell T (s), $\bar{\psi} = 0°$
required azimuth resolution ρ_{req} (m)
0
2
4
6
8
10
12
0.3
0.5
1
2
2.4669
3