
3D sorting product guide

Partner series and models offered in Japan

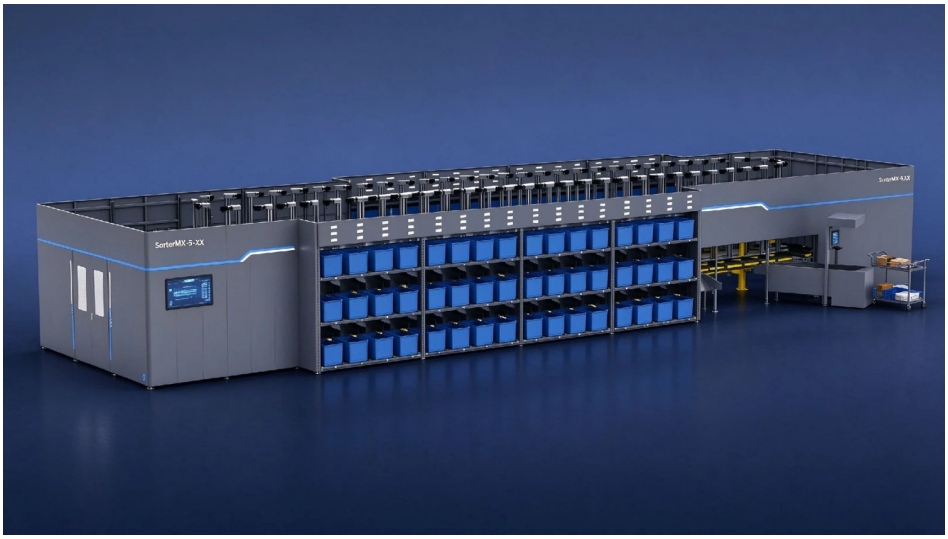

Series / model	Selection guidance
SorterMX-5	Manufacturing partner series: S01 / S02 / S03 / D01 / D02. Choose the carriage and induction configuration.
SorterMN-3	Compact integrated partner series. C01 with semi-automatic induction.
Omakase-kun	Japan-offered model: T-MX-72-J. Specifications confirmed for each project.
Tsubame-chan / SL	Japan-offered models: T-M-48-J, T-SL-50-J / T-SL-60-J. Specifications confirmed for each project.

The models offered in Japan and the manufacturing partner series are described separately. Similar names do not establish identical configurations or performance. Contact us for selection support.

SorterMX-5 / S series

One carriage per mast.

Item	S01	S02	S03
Carriage configuration	1 carriage per mast	1 carriage per mast	1 carriage per mast
Induction method	Semi-automatic induction	Right-angle induction	Manual induction
Maximum single-zone sorting throughput	8,640 items/hour Recommended speed: 1.2 m/s	7,200 items/hour	7,200 items/hour
Maximum running speed	1.5 m/s	1.0 m/s	1.0 m/s
Supported weight	0.1–10 kg	0.1–10 kg	0.1–10 kg
Minimum parcel dimensions	100 × 100 × 20 mm	50 × 50 × 5 mm	50 × 50 × 5 mm
Maximum parcel dimensions	450 × 320 × 200 mm *	450 × 320 × 200 mm *	450 × 320 × 200 mm *
Carriage pitch	500 mm	500 mm	500 mm
Carriage dimensions	430 × 700 mm	430 × 700 mm	430 × 700 mm
Noise level	72 dB or less	72 dB or less	72 dB or less

* Maximum parcel height depends on the number of destination levels. Actual dimensions and layout are designed for site conditions. Throughput figures are single-zone maximums. Recommended running speed for S01 and D01 is 1.2 m/s.

Drive & control

Lift travel: 1,900 / 2,900 mm. Integrated servo motors drive lifting, and servo motorized rollers drive sorting. Supports DC 48 V contact or contactless power supply, with infrared communication or leaky coaxial cable.

SorterMX-5 / D series

Two carriages per mast.

Item	D01	D02
Carriage configuration	2 carriages per mast	2 carriages per mast
Induction method	Semi-automatic induction	Right-angle induction
Maximum single-zone sorting throughput	17,280 items/hour Recommended speed: 1.2 m/s	14,400 items/hour
Maximum running speed	1.5 m/s	1.0 m/s
Supported weight	0.1–10 kg	0.1–10 kg
Minimum parcel dimensions	100 × 100 × 20 mm	50 × 50 × 5 mm
Maximum parcel dimensions	450 × 320 × 200 mm *	450 × 320 × 200 mm *
Carriage pitch	500 mm	500 mm
Carriage dimensions	430 × 700 mm	430 × 700 mm
Noise level	72 dB or less	72 dB or less

* Maximum parcel height depends on the number of destination levels. Actual dimensions and layout are designed for site conditions. Throughput figures are single-zone maximums. Recommended running speed for S01 and D01 is 1.2 m/s.

Drive & control

Lift travel: 1,900 / 2,900 mm. Integrated servo motors drive lifting, and servo motorized rollers drive sorting. Supports DC 48 V contact or contactless power supply, with infrared communication or leaky coaxial cable.

SorterMN-3 / C01

A compact integrated system for limited floor space. Parcels inducted by an operator are automatically sorted into order destinations.



Item	C01
Induction method	Semi-automatic induction (operator feeding, automatic sorting)
Maximum sorting throughput	1,600 items/hour
Maximum running speed	2.5 m/s
Carriage options	Standard / crossbar-equipped
Structure	Compact integrated, plug-and-play design
Sorting destinations	Multiple configurations available

Implementation conditions

Please provide minimum and maximum parcel dimensions and weights, required throughput, destination count, available space, power supply, temperature range and existing equipment interfaces. Maintenance scope and installation steps are also confirmed individually.

Figures are based on the manufacturing partner's October 2026 product materials. Actual capacity varies with parcel dimensions and weights, induction conditions, destination count and line configuration.

+81-50-6864-1858 / info@automaix.co.jp