

REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	unknown	14/10/26
B	Fairsolid rev 3 build (strut 71.77 -> 71.88 cm3)	unknown	14/10/26
C	Fairsolid rev 4: strut reshaped so the pump sits at the OEM position	unknown	14/10/26
D	Fairsolid rev 6: two through-slots in the strut arm	unknown	14/10/26
E	Fairsolid rev 7: strut rechecked for the 2 g load (60.28 -> 64.66 cm3); first drawing issued (#279)	unknown; drawing SteveCAD	14/10/26
F	Option B (B9): saddle/foot screws + keys, 0.5x45 chamfers on all edges, saddle key slot filled	SteveCAD	17/10/26

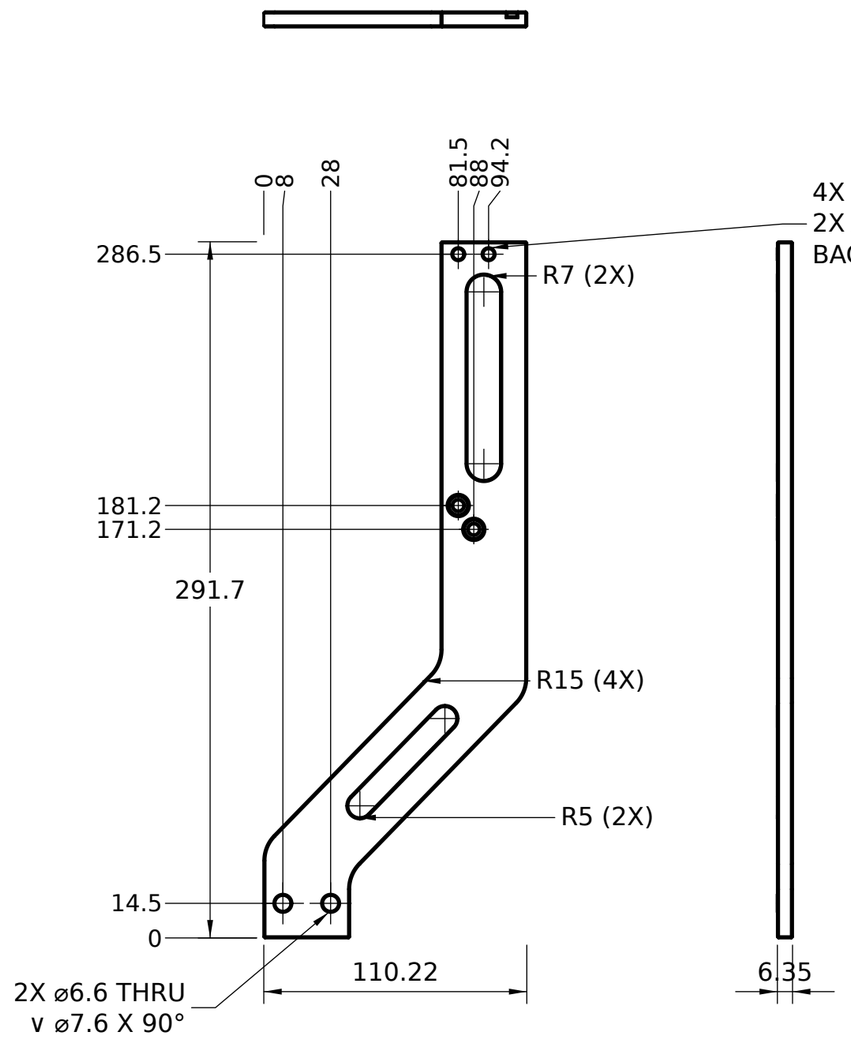

4X ⌀4.5 THRU, v⌀5.5 X 90° (0.5 CHAMFER)
2X AT THE SADDLE (171.2 / 181.2): v⌀8.4 X 90°
BACK FACE, ISO 10642 M4 FLUSH

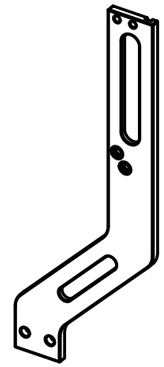

TRIMETRIC VIEW (SCALE 1:4)

NOTES:

1. 6061-T6 BILLET. MADE-WITH: build123d (cad/fuel-hanger/build_holder.py). REV = RELEASE COUNT (cad/DRAWING-REVS.md). SPOT TAPPED ENTRIES 90°.
2. ALL EDGES 0.5 x 45° CHAMFER, UNIFORM (MODELLED). POCKET FLOOR CORNERS: END-MILL OK.
3. +u SIDE FACE AT THE SADDLE (FH-105 TAB LOCATING FACE): 22.22 / 28.72 FROM THE 2X M4 CSK CENTRES 0/-0.05.
4. REV F: SADDLE KEY SLOT REMOVED, FOOT KEY SLOT KEPT. FIT THE BULKHEAD NUTS BEFORE THE STRUT.
5. PUMP MASS 0.6 kg ASSUMED (WALBRO F90000295, 2 G HAND CHECK).

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
FUEL HANGER - STRUT

PART / DWG NO.	REV	MATERIAL
ST185-FH-103	**F**	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:2.5	mm	B (11x17)	1 OF 1	2026-10-17	SteveCAD

SOURCE: st185-link-ecu-config\cad\fuel-hanger\fuel-hanger-strut.step
3RD ANGLE