
LAYOUT - top view, front of the car to the RIGHT, driver side UP (R140 / R153). Not to scale; lengths in mm (estimates until measured at the car).

Each segment: length | wires in it | DR-25 heat-shrink size for its bundle (est. from the wire ODs). Lengths per wire (path + 100 mm at each end) are in the pinout table.

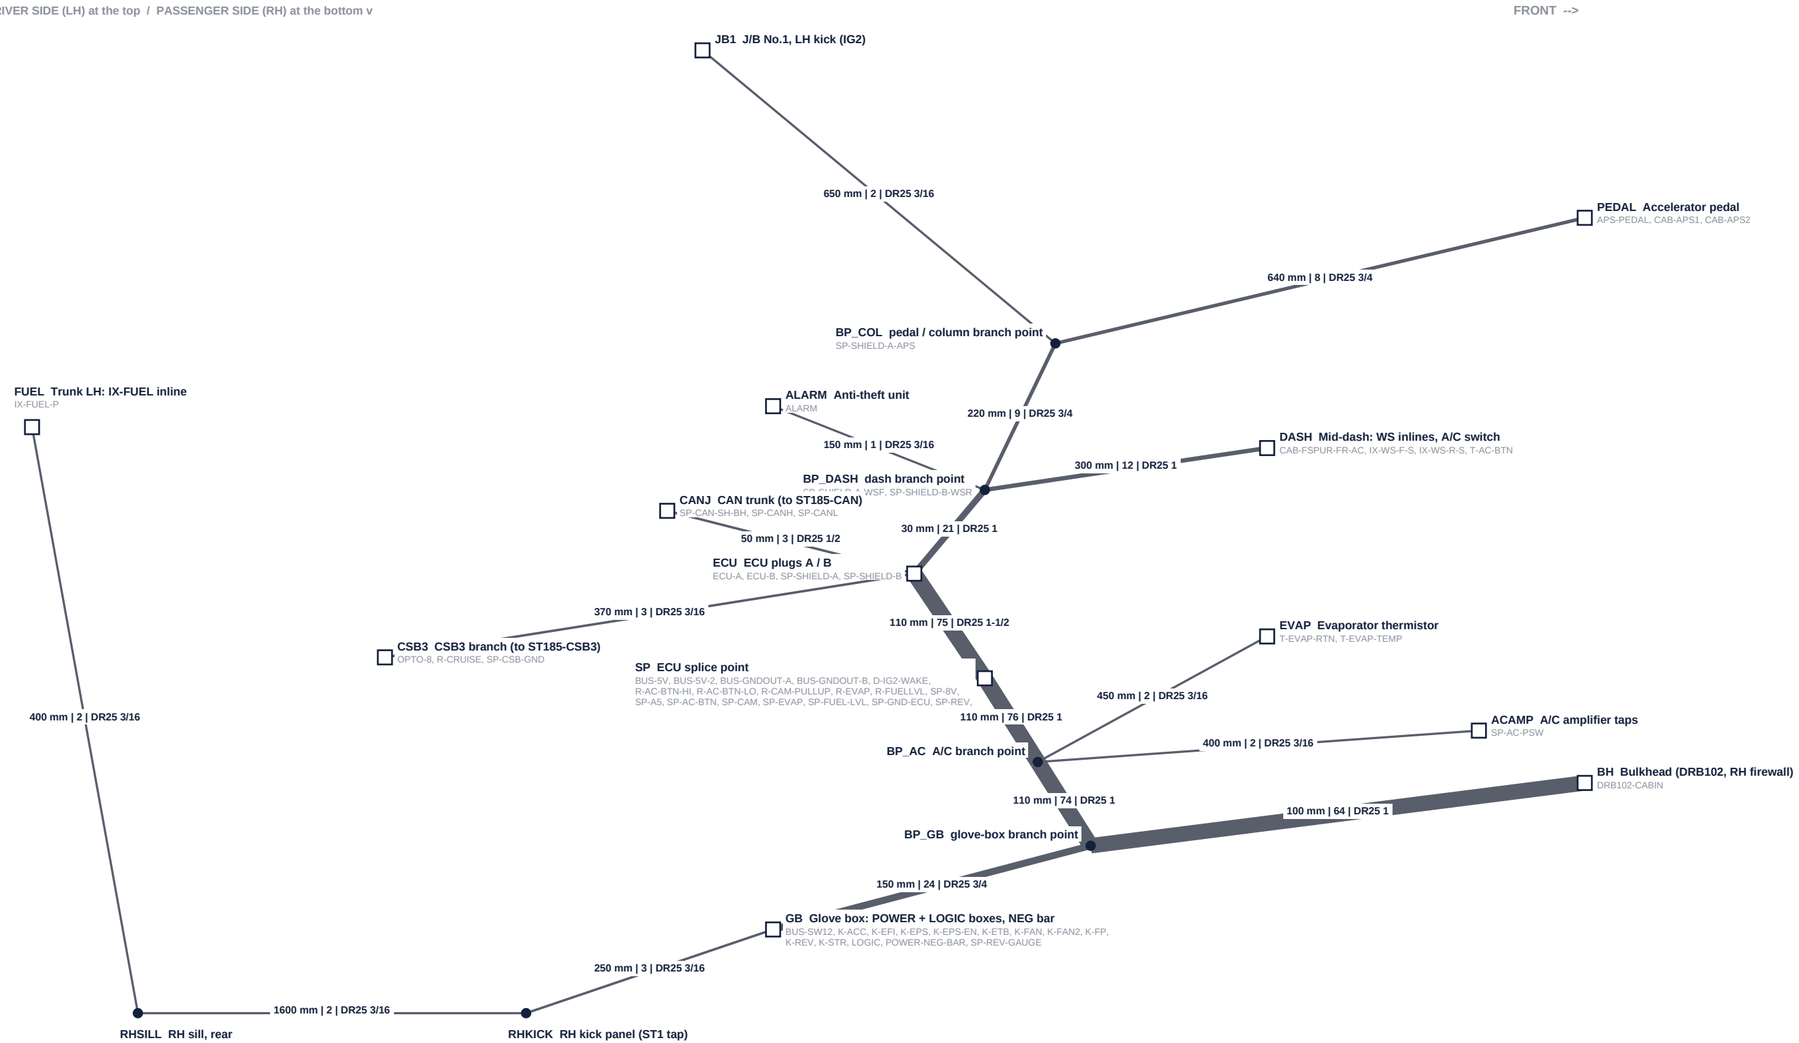

SEGMENTS

FROM	TO	MM	WIRES	BUNDLE	DR-25
ECU	SP	110	75	24.0	DR-25-1-1/2-0
SP	BP_AC	110	76	19.7	DR-25-1-0
BP_AC	BP_GB	110	74	19.5	DR-25-1-0
BP_GB	BH	100	64	18.3	DR-25-1-0
BP_GB	GB	150	24	11.9	DR-25-3/4-0
GB	RHKICK	250	3	3.3	DR-25-3/16-0
RHKICK	RHSILL	1600	2	2.7	DR-25-3/16-0
RHSILL	FUEL	400	2	2.7	DR-25-3/16-0
BP_AC	ACAMP	400	2	2.9	DR-25-3/16-0
BP_AC	EVAP	450	2	2.7	DR-25-3/16-0
ECU	BP_DASH	30	21	20.8	DR-25-1-0
BP_DASH	DASH	300	12	18.0	DR-25-1-0
BP_DASH	BP_COL	220	9	13.6	DR-25-3/4-0
BP_COL	PEDAL	640	8	15.3	DR-25-3/4-0
BP_COL	JB1	650	2	2.7	DR-25-3/16-0
BP_DASH	ALARM	150	1	1.9	DR-25-3/16-0
ECU	CSB3	370	3	3.7	DR-25-3/16-0
ECU	CANJ	50	3	9.4	DR-25-1/2-0

NODES

ECU ECU plugs A / B (centre dash, factory ECM spot)
SP ECU splice point (bussed DT plugs + soldered splices)
BP_AC A/C branch
BP_GB glove-box branch
BH DRB102 bulkhead, cabin half (RH firewall)
GB Glove box: POWER + LOGIC boxes, NEG bar, EHPS relay
RHKICK RH kick panel (old R/B No.4 spot, ST1 tap)
RHSILL RH sill, rear end (the run turns across the trunk)
FUEL Trunk LH: IX-FUEL inline to the fuel sender
ACAMP A/C amplifier (A18) taps
EVAP Evaporator case: thermistor A24 leads
BP_DASH dash branch
DASH Mid-dash above the ECU: front + rear WS inlines, A/C switch lead
BP_COL pedal / column branch
PEDAL Accelerator pedal (driver footwell)
JB1 J/B No.1, LH kick panel (IG2 taps)
ALARM Anti-theft unit (centre dash, left of the ECU)
CSB3 CSB3 branch (centre console) - continues on ST185-CSB3
CANJ CAN trunk at the ECU - continues on ST185-CAN

The ECU splice point (SP) is ONE place by the ECU plugs (Dan 2026-10-19): +5 V on BUS-5V + BUS-5V-2, Gnd Out A24 on BUS-GNDOUT-A, B22 on BUS-GNDOUT-B (bussed DEUTSCH DT, DECISIONS R169 parts), +8 V, switched 12 V, the AS feed and the ECU power ground soldered there. The ECU ground runs alone to the POWER box NEG bar (R216).

REVISIONS

REV	DATE	BY	DESCRIPTION
A	2026-10-19	DG	First issue: own drawings from the wire list (no harness.design app); loom A + B as one harness (...

ST185-AB-cabin - ECU harness (loom AB), cabin side

Layout - top view, segment lengths, wire counts, DR-25 sizes

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-AB-cabin-LAY	A	1 OF 1	512 x 246 mm	DG	2026-10-19

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale