

REVISIONS			
REV	DESCRIPTION	BY	DATE
C	#267: VRC-101 body B, VRC-103 board holder B	DG	15/10/26
D	#272: VRC-101 body C, VRC-103 board holder C	DG	16/10/26
E	#273: VRC-101 body D, VRC-103 board holder D; first assembly drawing (buildability review 18/10/26)	DG	16/10/26
F	VRC-101 body E (LP-16 double-D cutouts)	DG	18/10/26
G	CNLINKO LP-16-C05SX-02-101 (IN + OUT) is the maker's model (was an envelope, R184); jam nut on the wall's inside face	DG	19/10/26
H	VRC-101 body F and VRC-102 lid B: D5 a1 corner ears, SPIROL 150419 inserts, PA12 MJF. Holder screws on the measured bosses	DG	09/11/26


ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL / SPEC
1	1	ST185-VRC-101	VRC ENCLOSURE BODY	PA12, 3D PRINTED
2	1	ST185-VRC-102	VRC ENCLOSURE LID	PA12, 3D PRINTED
3	1	ST185-VRC-103	BOARD HOLDER	PA12, 3D PRINTED (SLS/MJF)
4	1	OpenLogicEFI NCV1124 RevB3	DUAL VR CONDITIONER MODULE	PURCHASED
5	2	CNLINKO LP-16-C05SX-02-101	LP-16 MALE PANEL SOCKET, REAR NUT (IN + OUT)	PURCHASED
6	1	PARKER N0674-70 2-039	O-RING AS568-039 (69.57 ID x 1.78), LID FACE SEAL	NBR 70
7	4	ACCU SSK-M3-12-A2	LID SCREW, ISO 10642 M3 x 12 CSK	A2 STAINLESS
8	2	LEMU 2990806014	HOLDER SCREW ISO 10642 M6 x 14, CSK TX30	A2 STAINLESS
10	4	SPIROL 150419	M3 HEAT-SET INSERT, SERIES 19, IN THE CORNER BORES	BRASS
9	4	ESSENTRA 50M060100P030	TAB SCREW M6 x 1.0 x 30 PAN HEAD (BOX MOUNTS ON NYLON)	NYLON 6/6

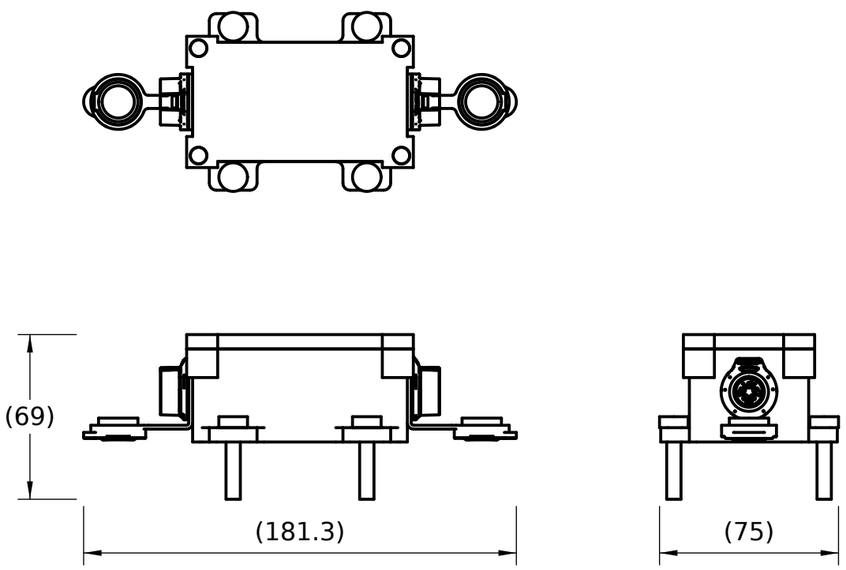

FRONT / TOP / RIGHT VIEWS SCALE 1:2.5

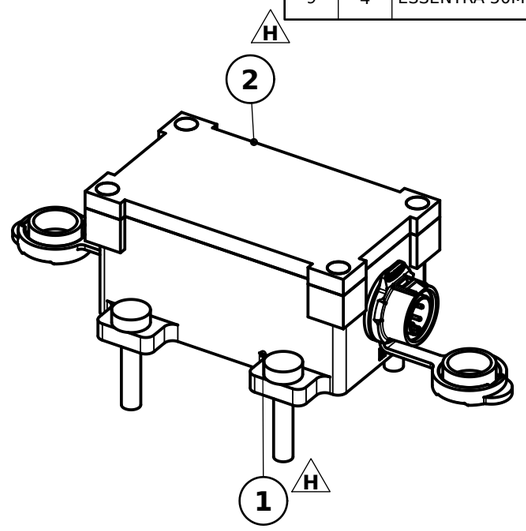

TRIMETRIC VIEW

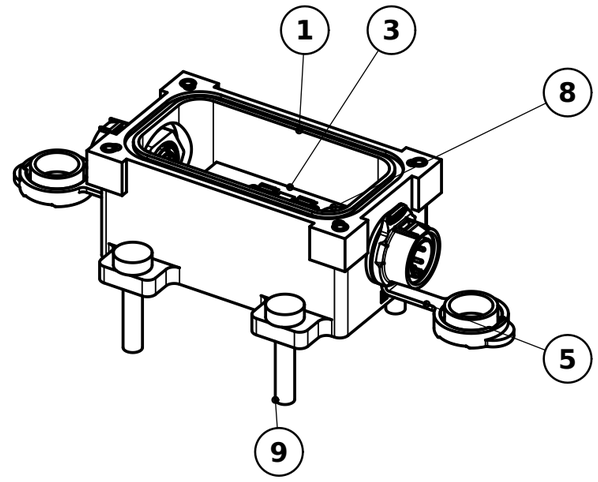

TRIMETRIC - LID REMOVED

NOTES:

1. QTY 2 ASSEMBLIES PER CAR (FRONT + REAR).
2. FIT THE 4 M3 LID SCREWS A LITTLE AT A TIME, CRISS-CROSS. THE LID SITS ON THE PRINTED RIM.
3. THE LP-16 REAR NUTS HOLD THE SOCKETS.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT: **ST185 CELICA GT-FOUR - LINK ECU CONVERSION**

TITLE: **VRC ENCLOSURE - ASSEMBLY**

PART / DWG NO.	REV	MATERIAL
ST185-VRC-100	H	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:2.5	mm	B (11x17)	1 OF 2	2026-11-09	DG

SOURCE: C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\vrc\\VRC_assembly.step

3RD ANGLE


STEP 1: BOARD + HOLDER INTO BODY

EXPLODED TRIMETRIC (NOT TO SCALE)

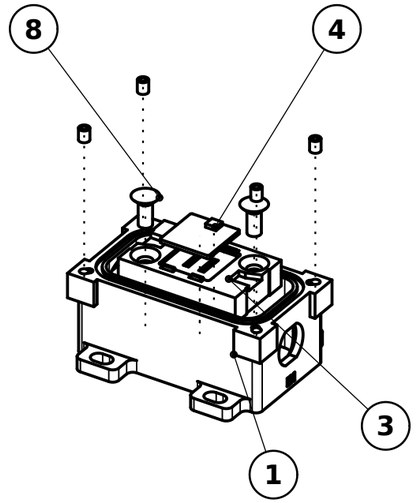


STEP 2: LP-16 SOCKETS INTO END WALLS

EXPLODED TRIMETRIC (NOT TO SCALE)

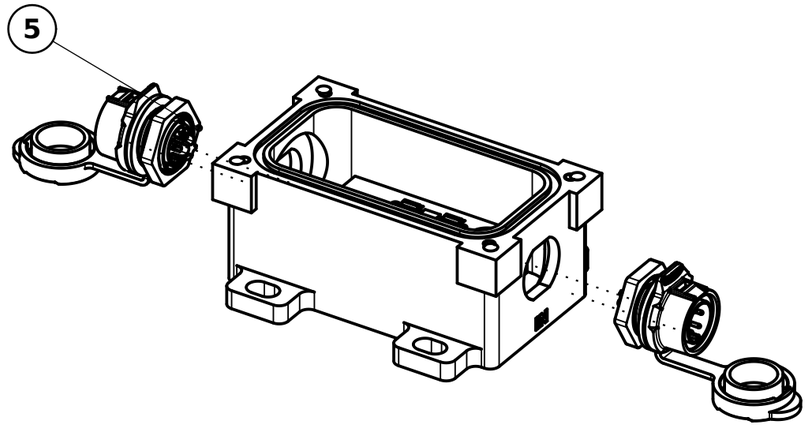


STEP 3: O-RING, LID, LID SCREWS

EXPLODED TRIMETRIC (NOT TO SCALE)

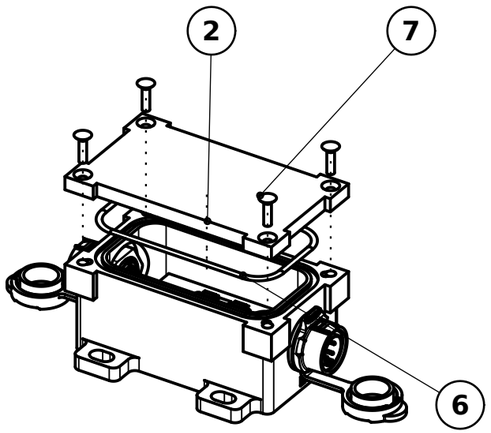

STEP 4: MOUNT TO BRACKET (TAB SCREWS)

EXPLODED TRIMETRIC (NOT TO SCALE)

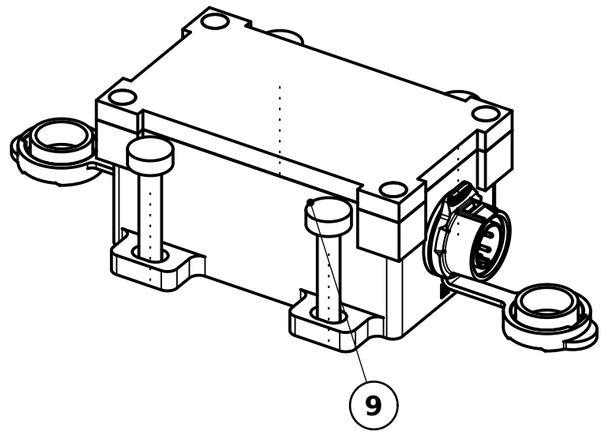

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
VRC ENCLOSURE - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-VRC-100	**H**	SEE BOM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
AS SHOWN	mm	B (11x17)	2 OF 2	2026-11-09	DG

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\vrc\\VRC_assembly.step

3RD ANGLE