


REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	DG	13/10/26
B	Holder v2 floor bosses: 4 M3 bosses out, 2 x D11 bosses for M6 (R126) (#267)	DG	15/10/26
C	Audit v3: tab slots 6.6 x 10 (F01), bosses +1 (F02), spotface, tab corners R3 (F11), IN / OUT upright (#272)	DG	16/10/26
D	N4: bosses to z 12.5, drill 5.0 x 11.5, M6 1.5 x D (R131) (#273); first engine drawing	DG	16/10/26
E	LP-16 cutouts (both end walls) are the CNLINKO double-D hole: D18.5 with two flats 16.5 apart, top and bottom (was one flat at the top)	DG	18/10/26
F	D5 a1 corner ears: 4 x 3.99 x 8 bores for SPIROL 150419 at (±42.5, ±22.5). PA12 MJF (Dan 2026-11-09)	DG	09/11/26

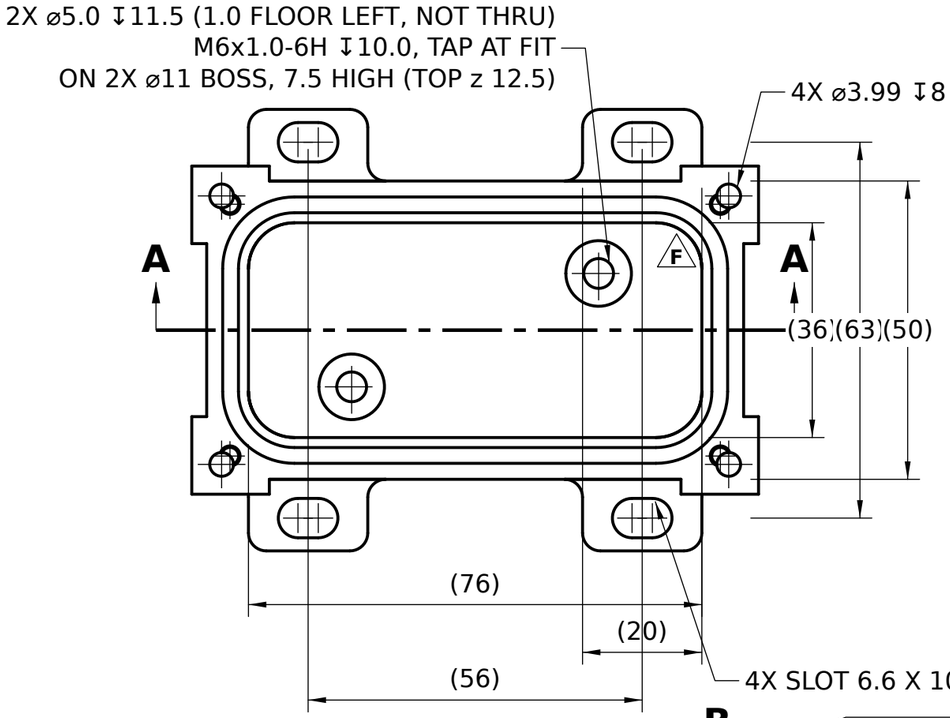


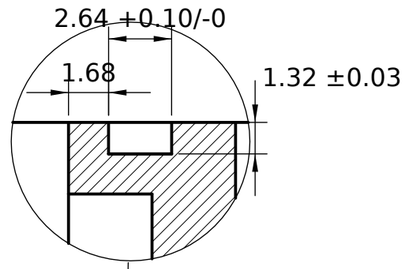


DETAIL B
SCALE 4:1

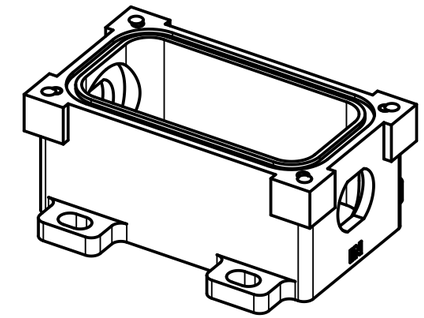

TRIMETRIC VIEW (SCALE 1:1.67)

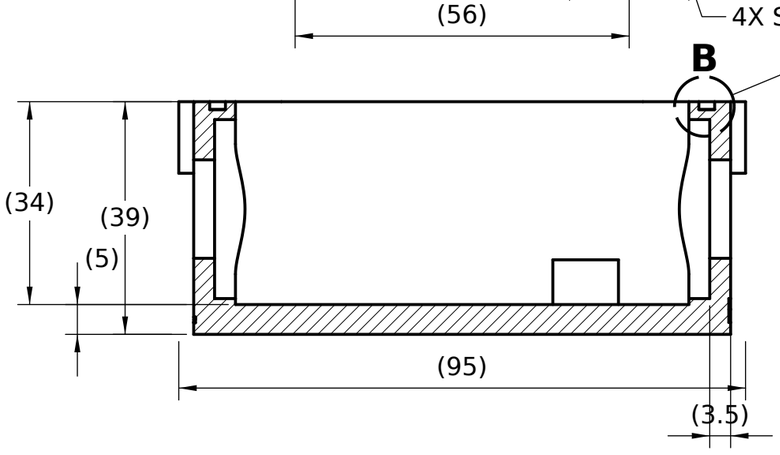

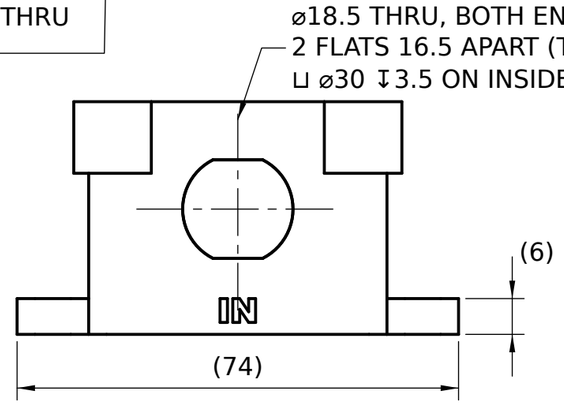

SECTION A-A

NOTES:

1. PA12, POWDER-BED PRINTED (SLS / MJF). PRINT FROM THE STEP MODEL.
2. SIZES ON THIS SHEET ARE FOR CHECKING ONLY (OVERALL SIZE). THE 3D MODEL DEFINES EVERY OTHER FEATURE.
3. QTY 2 PER CAR, BOTH THE SAME.
4. O-RING GROOVE (DETAIL B) FOR AN AS568-039 NBR70 FACE SEAL. GROOVE CORNERS R0.13-0.38.
5. 4 CORNER BORES ⌀3.99 x 8 DEEP, ON ⌀10 BOSSES, AXES AT (±42.5, ±22.5), FOR SPIROL 150419 HEAT-SET INSERTS.
6. 2 FLOOR BOSSES: ⌀5.0 DRILL, M6 x 1.0, FOR LEMU 2990806014.
7. ENGRAVE IN (+X END) AND OUT (-X END): ARIAL BLACK 4.0 HIGH, 0.3 DEEP.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
VRC ENCLOSURE - BODY

PART / DWG NO.	REV	MATERIAL
ST185-VRC-101	F	PA12 (MJF)

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1	mm	B (11x17)	1 OF 1	2026-11-09	DG

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\vrc\\VRC_part_VRC-Body.step

3RD ANGLE