REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	DG	13/10/26
B	D5 a1 corner ears: lid holes move to (±42.5, ±22.5), 3.45 through, 90 degree countersink to 7.0. PA12 MJF (Dan 2026-11-09)	DG	09/11/26

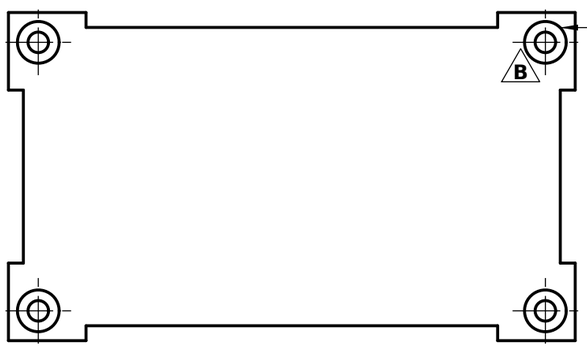

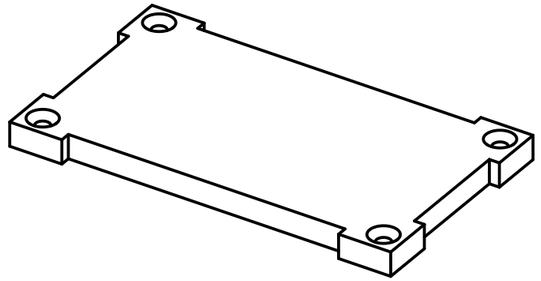

TRIMETRIC VIEW (SCALE 1:1.25)

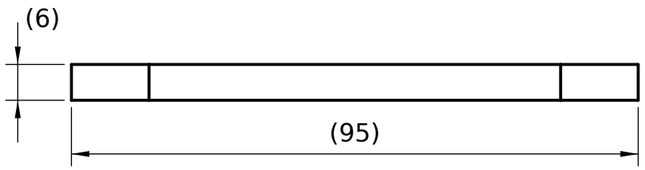



NOTES:

1. PA12, POWDER-BED PRINTED (SLS / MJF). PRINT FROM THE STEP MODEL.
2. SIZES ON THIS SHEET ARE FOR CHECKING ONLY (OVERALL SIZE). THE 3D MODEL DEFINES EVERY OTHER FEATURE.
3. QTY 2 PER CAR.
4. 4 HOLES ⌀3.45, 90° COUNTERSINK TO ⌀7, AXES AT (±42.5, ±22.5), FOR ACCU SSK-M3-12-A2.
5. THE BOTTOM FACE IS THE O-RING SEALING FACE. THE LID SITS ON THE BODY RIM.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT: **ST185 CELICA GT-FOUR - LINK ECU CONVERSION**

TITLE: **VRC ENCLOSURE - LID**

PART / DWG NO.	REV	MATERIAL
ST185-VRC-102	B	PA12 (MJF)

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1	mm	B (11x17)	1 OF 1	2026-11-09	DG

SOURCE: C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\vrc\\VRC_part_VRC-Lid.step

3RD ANGLE