| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | BY | DATE |
| A | Initial | DG | 13/10/26 |

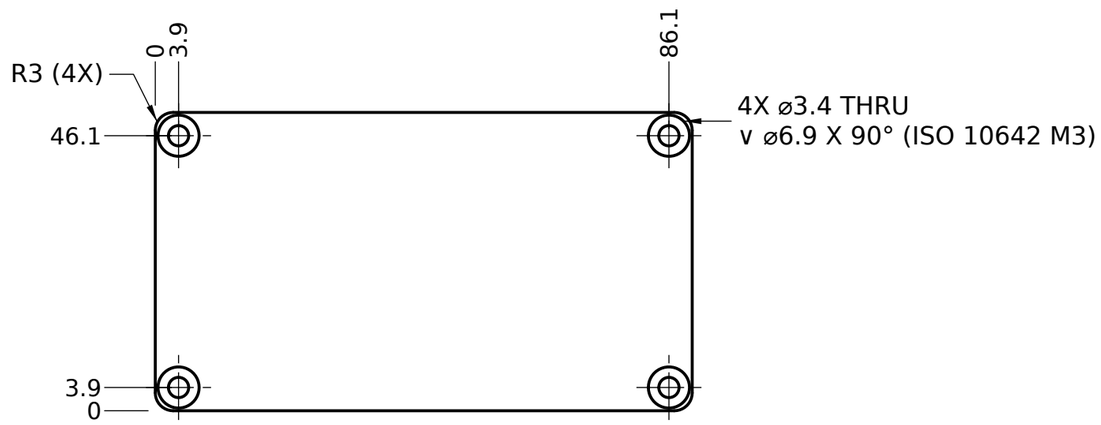


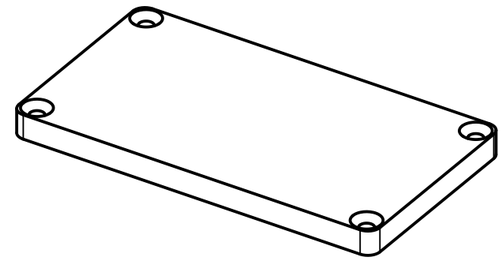

**TRIMETRIC VIEW (SCALE 1:1.25)**

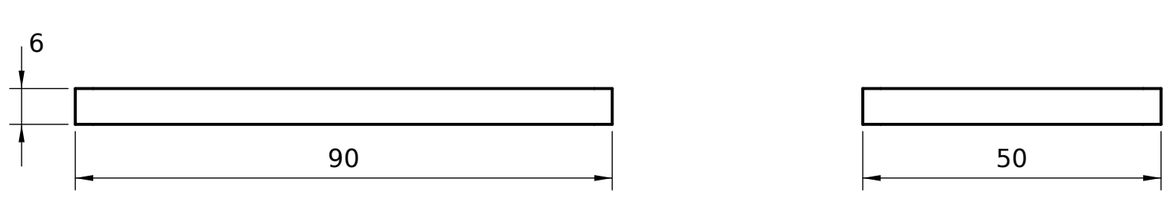


**NOTES:**

1. 6061-T6 ALUMINUM. STOCK 8 x 95 x 55 PLATE; FACE BOTH SIDES TO 6.0. QTY 2 PER CAR.
2. THE BOTTOM FACE IS THE O-RING SEALING FACE: Ra 0.8, FLAT WITHIN 0.05, NO TOOL MARKS ACROSS THE SEAL PATH. THE LID SITS METAL TO METAL ON THE BODY RIM.

**UNLESS OTHERWISE SPECIFIED:**
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
**ST185 CELICA GT-FOUR - LINK ECU CONVERSION**

TITLE
# VRC ENCLOSURE - LID

| PART / DWG NO. | REV | MATERIAL |
|---|---|---|
| **ST185-VRC-102** | **A.02** | 6061-T6 ALUMINUM |

| SCALE | UNITS | SIZE | SHEET | DATE | DRAWN |
|---|---|---|---|---|---|
| 1:1 | mm | B (11x17) | 1 OF 1 | 2026-10-19 | DG |

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\vrc\\VRC_part_VRC-Lid.step

3RD ANGLE