| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | BY | DATE |
| A | Initial | DG | 14/10/26 |
| B | Fairsolid rev 4: OEM pump position (24.20 -> 24.88 cm3) | DG | 14/10/26 |
| C | Fairsolid rev 6: R4 corners, 4 floor windows, 4 side windows, back pad trimmed | DG | 14/10/26 |
| D | Fairsolid rev 7 build (19.21 -> 20.00 cm3); first drawing issued (#279) | DG | 14/10/26 |
| E | Option B: two side arms, 2 M4 taps + key, R0.8 fillets (3 skipped) | DG | 17/10/26 |

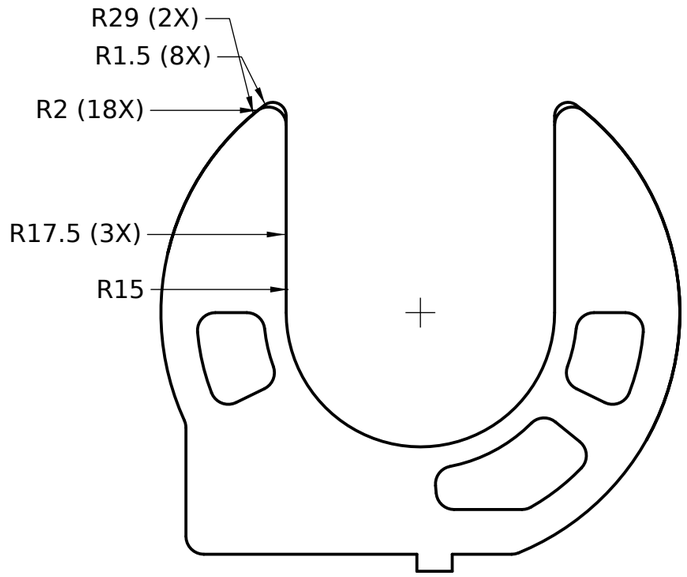


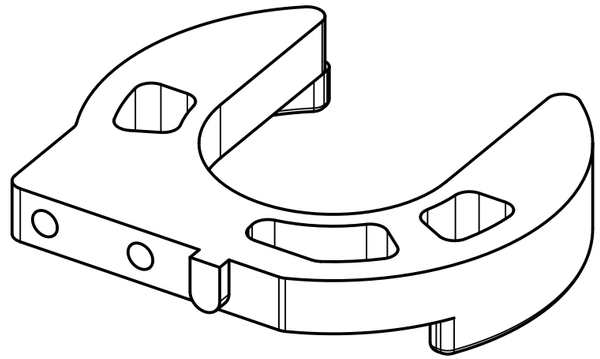

**TRIMETRIC VIEW (SCALE 1.5:1)**

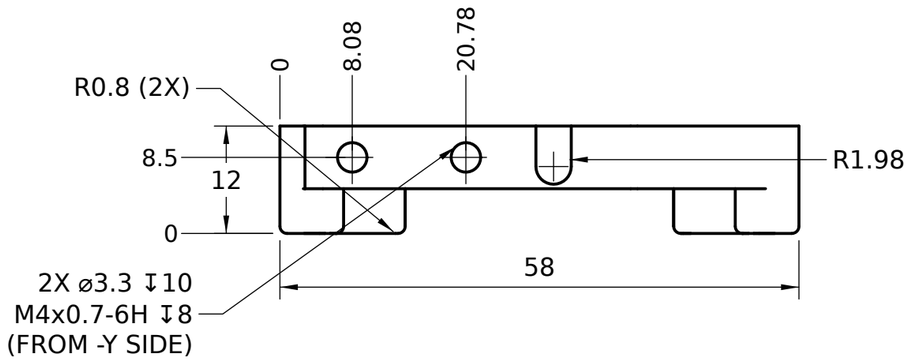


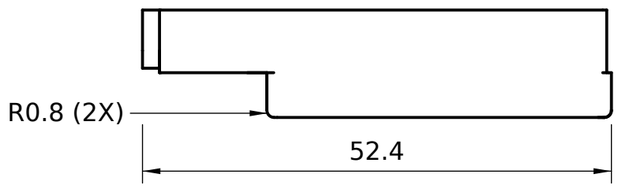


**NOTES:**

1. 6061-T6 ALUMINUM BILLET. SPOT FACE EVERY TAPPED HOLE ENTRY 90°, AS WIDE AS THE THREAD.
2. THE FRONT VIEW SHOWS THE BACK FACE (IT SITS ON THE STRUT): 2 M4 TAPPED HOLES, 10 DEEP, FOR ISO 4762 M4 x 14 SCREWS.
3. THE KEY TONGUE FITS THE SLOT IN THE STRUT FOOT.

**UNLESS OTHERWISE SPECIFIED:**
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
**ST185 CELICA GT-FOUR - LINK ECU CONVERSION**

TITLE
# FUEL HANGER - FOOT

| PART / DWG NO. | REV | MATERIAL |
|---|---|---|
| **ST185-FH-104** | **E.02** | 6061-T6 ALUMINUM |

| SCALE | UNITS | SIZE | SHEET | DATE | DRAWN |
|---|---|---|---|---|---|
| 1.5:1 | mm | B (11x17) | 1 OF 1 | 2026-10-19 | DG |

SOURCE
st185-link-ecu-config\cad\fuel-hanger\fuel-hanger-foot.step (build123d)

3RD ANGLE