REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	DG	14/10/26
B	Fairsolid rev 4 build (24.15 -> 24.18 cm3)	DG	14/10/26
C	Fairsolid rev 5: low-profile band clamp saddle; first drawing issued (#279)	DG	14/10/26
D	Option B (B9): channel for a 12.7 band, key removed, locating band tab	DG	17/10/26

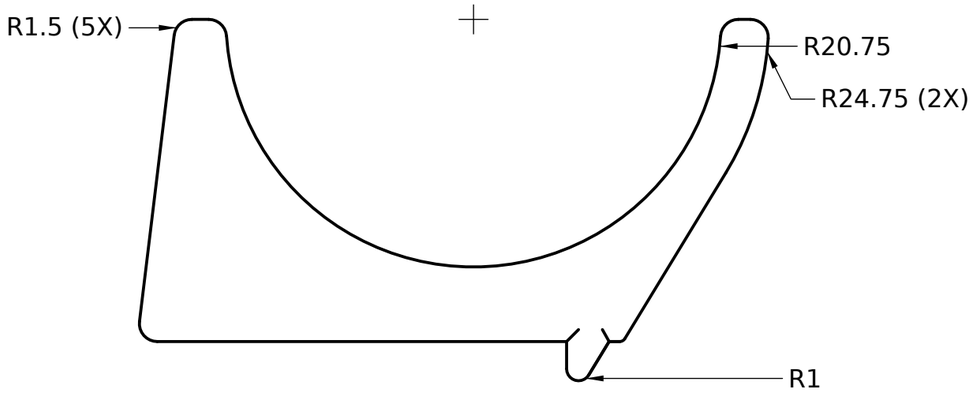

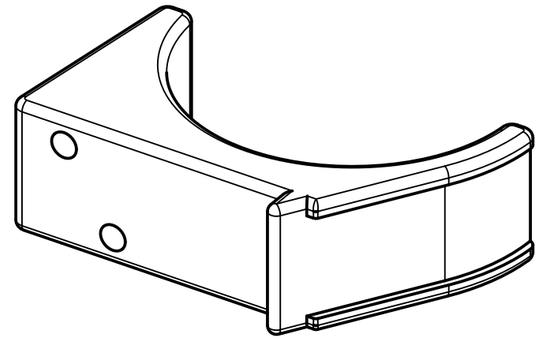

TRIMETRIC VIEW (SCALE 1.5:1)

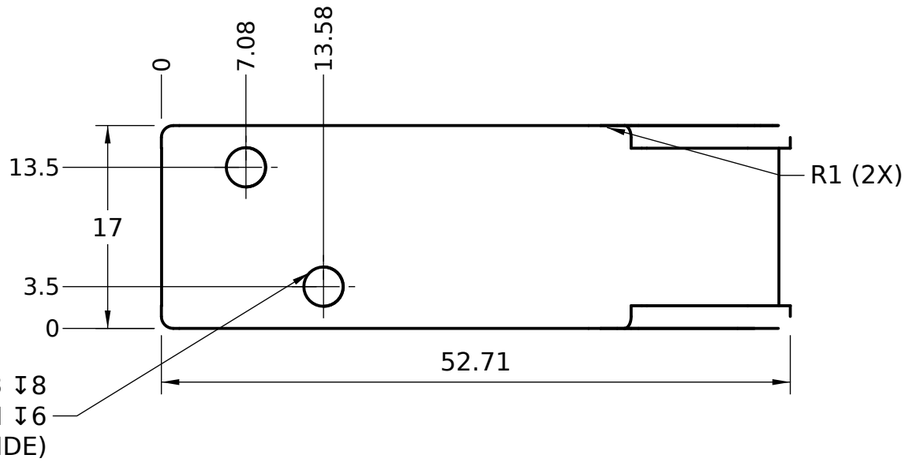

NOTES:

1. 6061-T6 ALUMINUM BILLET. SPOT FACE EVERY TAPPED HOLE ENTRY 90°, AS WIDE AS THE THREAD.
2. THE BAND CHANNEL (13.2 WIDE x 1.0 DEEP) TAKES A 12.7 (1/2 IN) WORM-DRIVE BAND.
3. 2 M4 TAPPED HOLES, 8 DEEP MAX. SCREWS: ISO 10642 M4 x 12 AT 2 N·m WITH LOCTITE 243.
4. THE TAB LOCATING FACE IS 22.22 / 28.72 FROM THE TAPPED HOLES, +0.05 / 0, SO IT SLIDES ON FH-103 WITH 0-0.10 PLAY. PUSH THE SADDLE TOWARD THE STRUT, THEN TIGHTEN.
5. TAB ROOT R0.5 MAX. LIP ENDS R2 MAX. DEBURR 0.2 MAX.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
FUEL HANGER - PUMP SADDLE

PART / DWG NO.	REV	MATERIAL
ST185-FH-105	**D.02**	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
2:1	mm	B (11x17)	1 OF 1	2026-10-19	DG

SOURCE: st185-link-ecu-config\cad\fuel-hanger\fuel-hanger-saddle.step (build123d)

3RD ANGLE