


REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	Claude	13/10/26
B	Audit v3: tab slots F01, standoff M3 F08, tab corners F11 (#272)	Claude	16/10/26
C	R133 lock-in supports + M8 set-screw seal holes (#274); first drawing issued (#280)	unknown; drawing SteveCAD	16/10/26

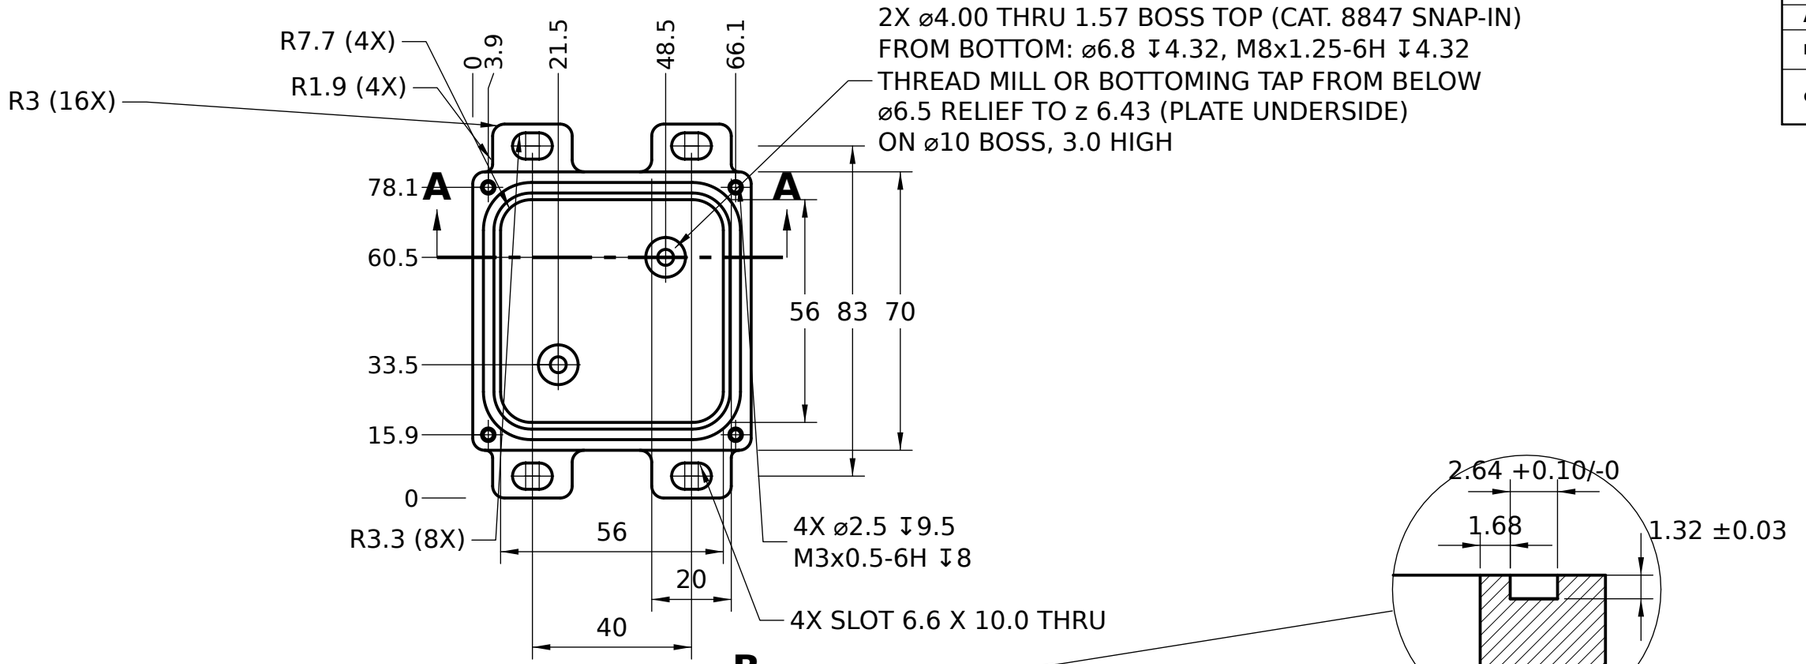


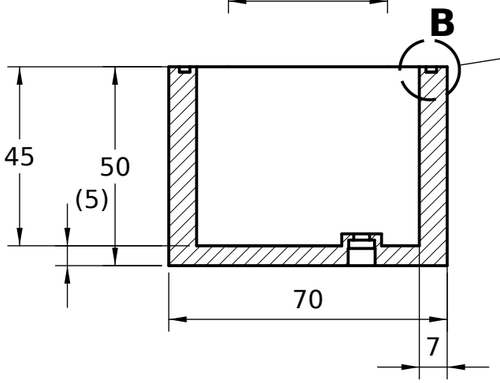


SECTION A-A



DETAIL B
SCALE 3:1

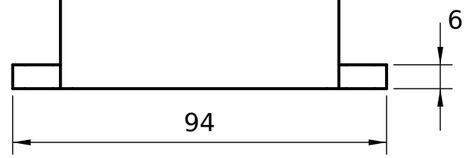

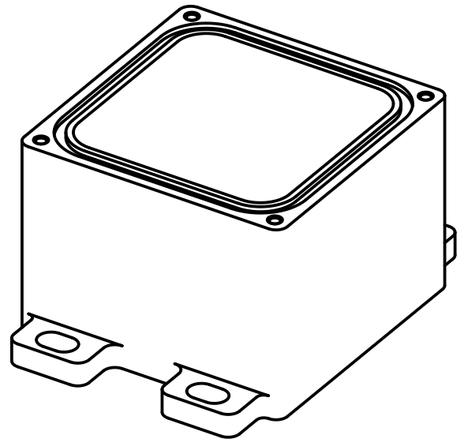

TRIMETRIC VIEW (SCALE 1:1.33)

NOTES:

1. 6061-T6. STOCK 75 x 100 x 53 BILLET. QTY 1 PER CAR.
2. O-RING GROOVE (DETAIL B) FOR AS568-039 NBR70 FACE SEAL. GROOVE FLOOR, WALLS AND LID SEALING FACE Ra 0.8. GROOVE CORNER R0.13-0.38.
3. BOARD ON 2X CAT. 8847 L10 NYLON LOCK-IN SUPPORTS IN THE ⌀4.00 HOLES; BOARD UNDERSIDE z 18.0 (R133).
4. SEAL: 2X M8x1.25x6 ISO 4026 SET SCREW + THREAD SEALANT, TIP z 4.0 MAX, 2.0 PROUD. SEAL ONLY - 1.5xD RULE N/A (R133).
5. M8: THREAD MILL OR BOTTOMING TAP FROM BELOW (THROUGH TAP CANNOT PASS ⌀6.5 RELIEF).
6. TAB CORNERS R1.9 AT x ±30: CUTTER r <= 1.5 (F11).
7. EDGE BREAKS NOT MODELLED (R138): BREAK SHARP EDGES 0.2-0.4 EXCEPT O-RING GROOVE / SEAL FACE. SPOT TAPPED ENTRIES 90°.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
CSB3 ENCLOSURE - BODY

PART / DWG NO.	REV	MATERIAL
ST185-CSB3-101	C	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1.5	mm	B (11x17)	1 OF 1	2026-10-17	SteveCAD

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\csb3\\CSB3_part_CSB3-Body.step

3RD ANGLE