


REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	DG	13/10/26
B	Audit v3: tab slots F01, standoff M3 F08, tab corners F11 (#272)	DG	16/10/26
C	R133 lock-in supports + M8 set-screw seal holes (#274); first drawing issued (#280)	DG	16/10/26
D	D5 a1 corner ears: 4 x 3.99 x 8 bores for SPIROL 150419 at (±32.5, ±32.5). PA12 MJF (Dan 2026-11-09)	DG	09/11/26

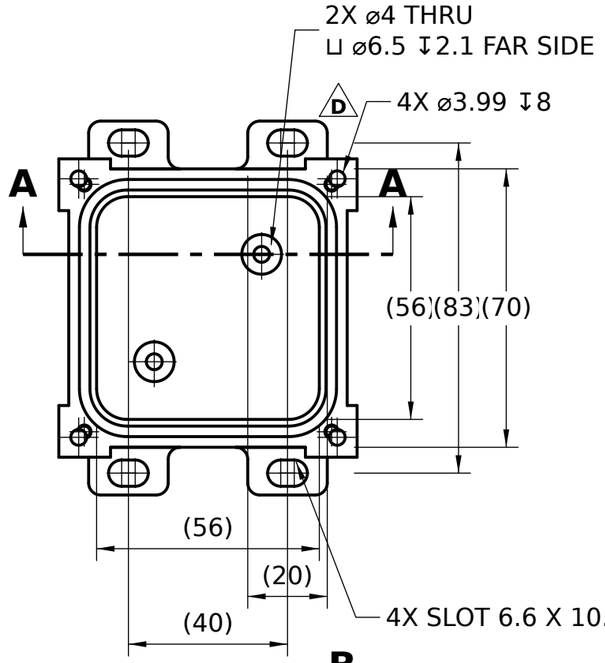





DETAIL B
SCALE 3:1

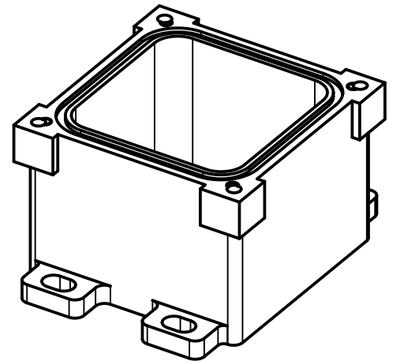

TRIMETRIC VIEW (SCALE 1:1.67)

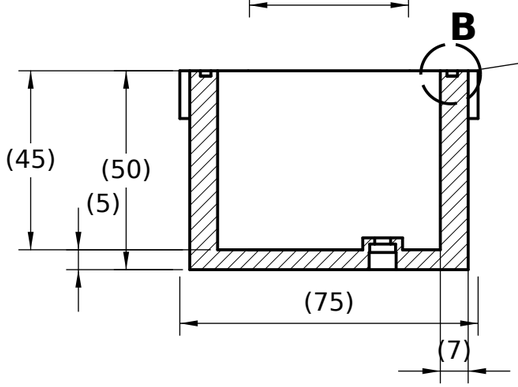

SECTION A-A

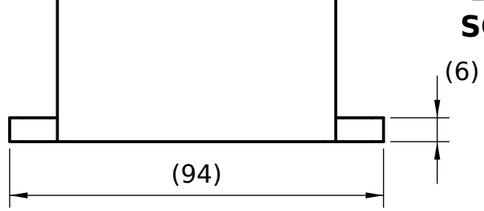

NOTES:

1. PA12, POWDER-BED PRINTED (SLS / MJF). PRINT FROM THE STEP MODEL.
2. SIZES ON THIS SHEET ARE FOR CHECKING ONLY (OVERALL SIZE). THE 3D MODEL DEFINES EVERY OTHER FEATURE.
3. QTY 1 PER CAR.
4. O-RING GROOVE (DETAIL B) FOR AN AS568-039 NBR70 FACE SEAL. GROOVE CORNERS R0.13-0.38.
5. 4 CORNER BORES ⌀3.99 x 8 DEEP, ON ⌀10 BOSSES, AXES AT (±32.5, ±32.5), FOR SPIROL 150419 HEAT-SET INSERTS.
6. THE BOARD SITS ON 2 CAT. 8847 L10 NYLON SUPPORTS THAT SNAP INTO THE TWO ⌀4.00 HOLES.
7. EACH FLOOR HOLE TAKES AN ACCU SSF-M8-6-A2 SET SCREW FROM BELOW. THE TIP STOPS AT z 4.0. THIS IS NOT A WATER SEAL.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
CSB3 ENCLOSURE - BODY

PART / DWG NO.	REV	MATERIAL
ST185-CSB3-101	D	PA12 (MJF)

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1.5	mm	B (11x17)	1 OF 1	2026-11-09	DG

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\csb3\\CSB3_part_CSB3-Body.step

3RD ANGLE