REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	DG	13/10/26
B	Audit v3: F09 D-hole corners R3 (#272)	DG	16/10/26
C	R132 lid loft D62 x 6 (#273); first drawing issued (#280)	DG	16/10/26
D	D43.08 x 0.2 round relief at the HD34 flange seat: the flat starts 0.2 up, so the round root of the HD34 pilot (TE model) clears	DG	19/10/26
E	D5 a1 corner ears: lid holes move to (±32.5, ±32.5), 3.45 through, 90 degree countersink to 7.0. PA12 MJF (Dan 2026-11-09)	DG	09/11/26

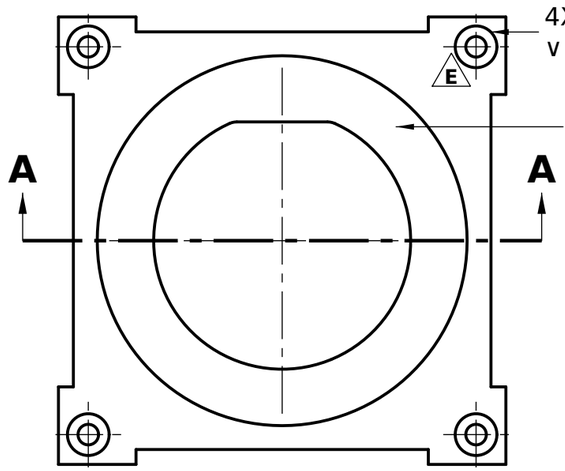

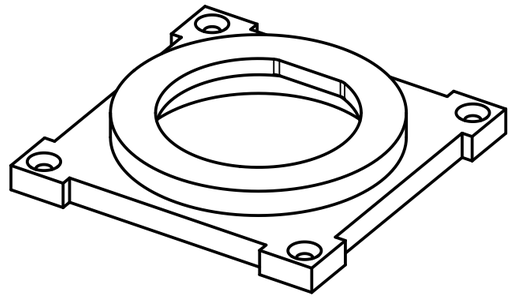

TRIMETRIC VIEW (SCALE 1:1.25)

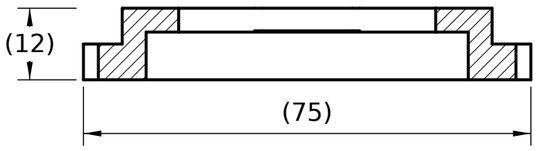

SECTION A-A

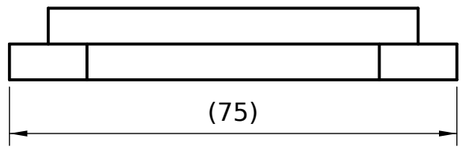

NOTES:

1. PA12, POWDER-BED PRINTED (SLS / MJF). PRINT FROM THE STEP MODEL.
2. SIZES ON THIS SHEET ARE FOR CHECKING ONLY (OVERALL SIZE). THE 3D MODEL DEFINES EVERY OTHER FEATURE.
3. QTY 1 PER CAR.
4. 4 HOLES ⌀3.45, 90° COUNTERSINK TO ⌀7, AXES AT (±32.5, ±32.5), FOR ACCU SSK-M3-12-A2.
5. THE BOTTOM FACE IS THE O-RING SEALING FACE. THE LID SITS ON THE BODY RIM.
6. THE HD34-24-33PE CONNECTOR GOES THROUGH THE BIG HOLE. THE FLAT LINES IT UP.
7. THE FIRST 0.2 OF THE BIG HOLE ABOVE THE ⌀54 SEAT IS FULL ROUND ⌀43.08 (NO FLAT), SO THE CONNECTOR'S ROUND COLLAR SEATS.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
CSB3 ENCLOSURE - LID

PART / DWG NO.	REV	MATERIAL
ST185-CSB3-102	**E**	PA12 (MJF)

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1	mm	B (11x17)	1 OF 1	2026-11-09	DG

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\csb3\\CSB3_part_CSB3-Lid.step

3RD ANGLE