


REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	Claude	13/10/26
B	Audit v3: tab slots F01, standoff M3 F08, tab corners F11 (#272)	Claude	16/10/26
C	R133 lock-in supports + M8 set-screw seal holes (#274); first drawing issued (#280)	unknown; drawing SteveCAD	16/10/26

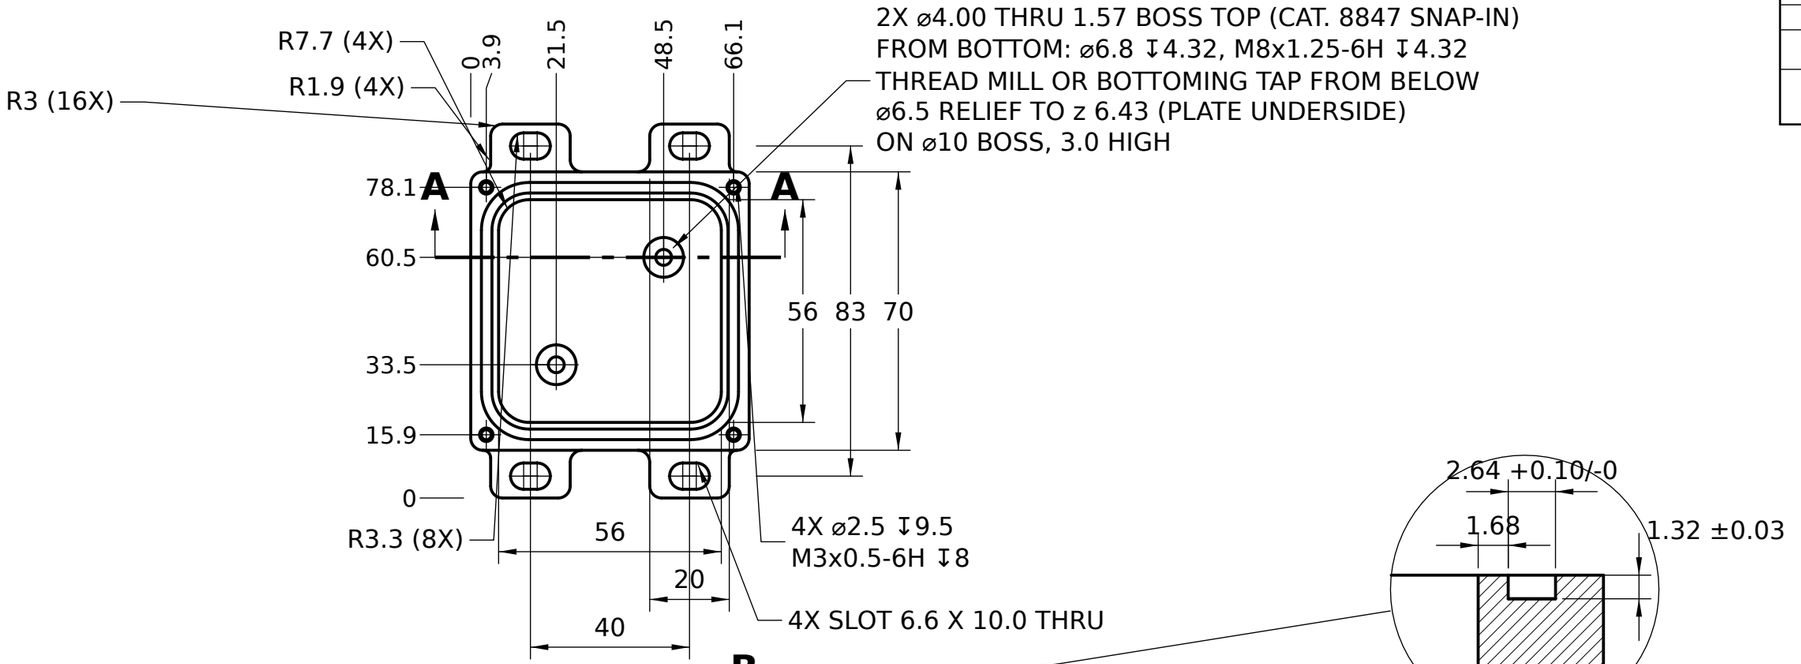


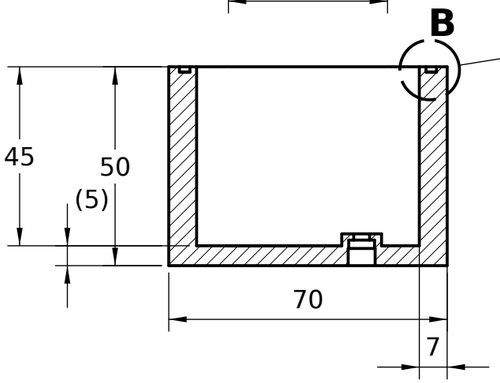


SECTION A-A



DETAIL B
SCALE 3:1

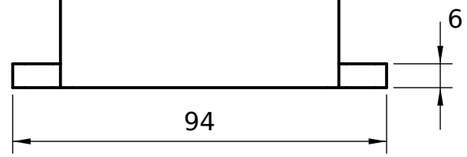

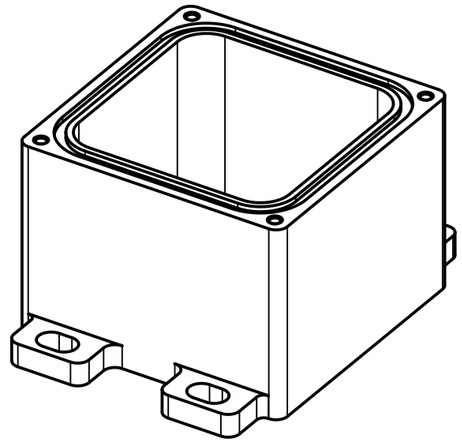

TRIMETRIC VIEW (SCALE 1:1.33)

NOTES:

1. 6061-T6 ALUMINUM. STOCK 75 x 100 x 53 BILLET. QTY 1 PER CAR.
2. O-RING GROOVE (DETAIL B) FOR AN AS568-039 NBR70 FACE SEAL. GROOVE FLOOR, GROOVE WALLS AND THE LID FACE: Ra 0.8. GROOVE CORNERS R0.13-0.38.
3. THE BOARD SITS ON 2 CAT. 8847 L10 NYLON SUPPORTS THAT SNAP INTO THE TWO ⌀4.00 HOLES.
4. SEAL EACH ⌀4.00 HOLE FROM BELOW: AN M8 x 1.25 x 6 ISO 4026 SET SCREW WITH THREAD SEALANT. THE SCREW TIP STOPS AT z 4.0 (THE SCREW STANDS 2.0 PROUD OF THE BOTTOM FACE).
5. CUT THE M8 THREADS FROM BELOW WITH A THREAD MILL OR A BOTTOMING TAP. A THROUGH TAP WILL NOT PASS THE ⌀6.5 RELIEF.
6. TAB CORNERS AT x ±30 ARE R1.9: USE A CUTTER OF R1.5 OR SMALLER.
7. SPOT FACE EVERY TAPPED HOLE ENTRY 90°, AS WIDE AS THE THREAD.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT: **ST185 CELICA GT-FOUR - LINK ECU CONVERSION**

TITLE: **CSB3 ENCLOSURE - BODY**

PART / DWG NO.	REV	MATERIAL
ST185-CSB3-101	C.01	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1.5	mm	B (11x17)	1 OF 1	2026-10-18	SteveCAD

SOURCE: C:\\projects\\active\\st185-link-ecu-config\\cad\\enclosures\\csb3\\CSB3_part_CSB3-Body.step

3RD ANGLE