REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	Claude	17/10/26

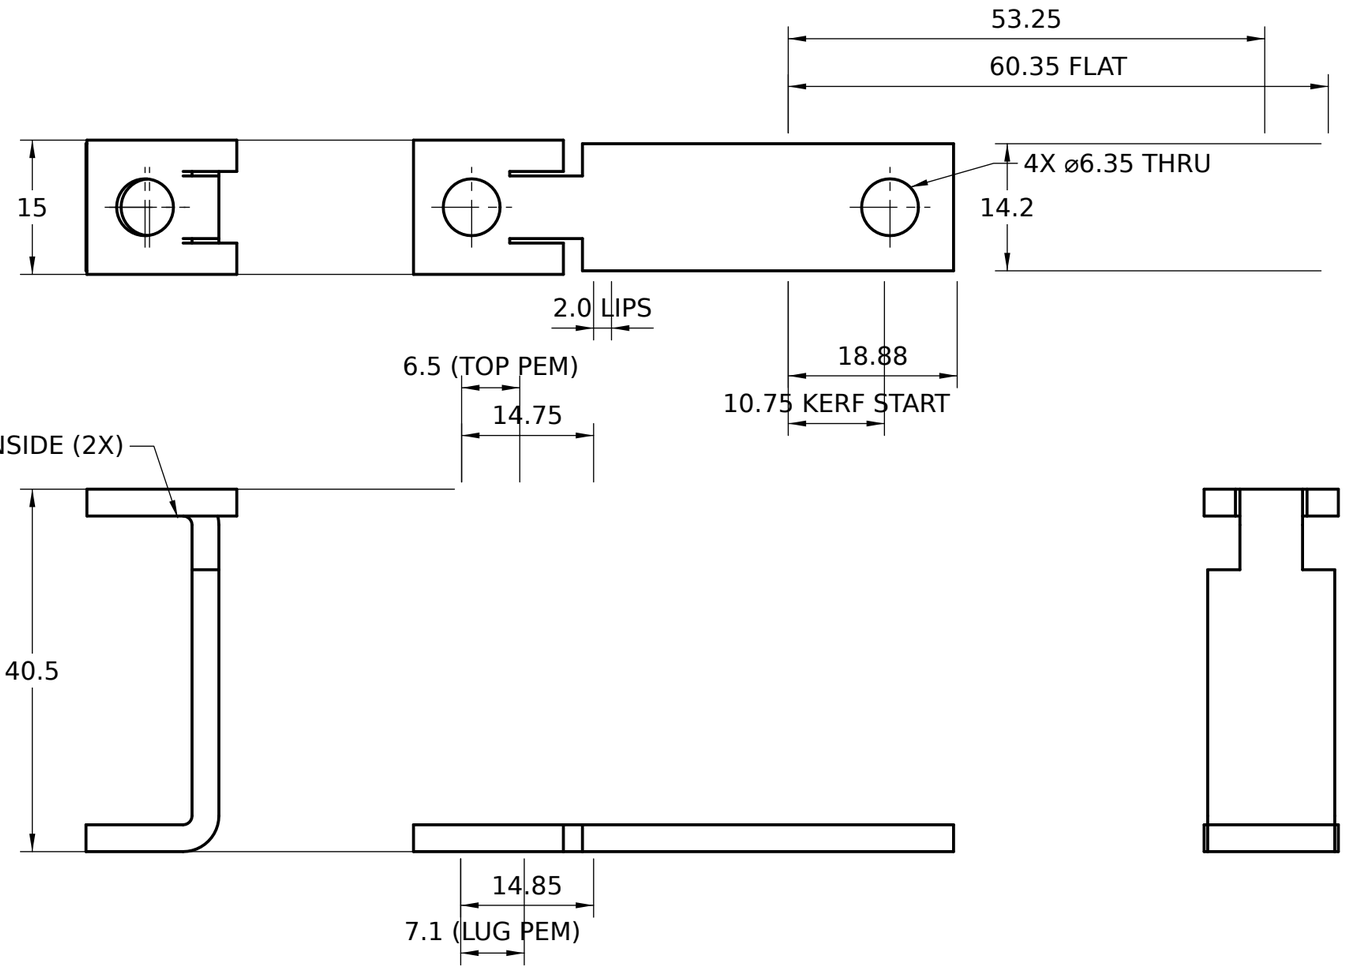

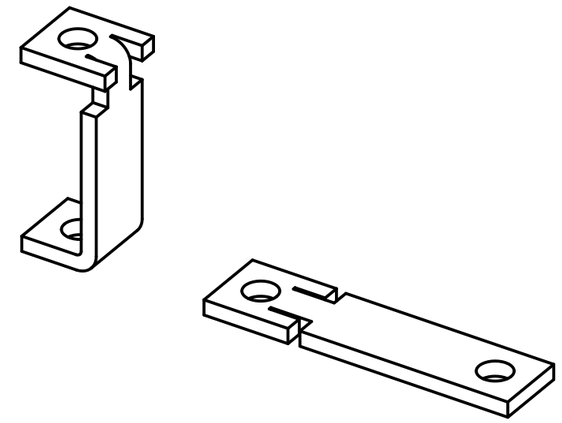

TRIMETRIC VIEW (SCALE 1:1)

NOTES:

1. C110 TINNED, CUT FROM 3 x 15 BAR (BOPAODAO B09Z7NBLDK). QTY 14 PER CAR (EVERY POWER AMI POSITION; THE IN ROW TURNS IT 180 DEG).
2. BLANK: SAW 60.95 LONG (0.6 OVER AT THE TOP END), DRILL 2X ⌀6.35 +0.08/0 (PEM CLSS-M5-2); 2X KERF 0.5 WIDE AT 3.5 - 4.0 EACH SIDE OF CL, 10.75 TO 16.75, THEN NOTCH 3.5 - 7.5 TO 18.88; MILL / FILE BOTH EDGES TO 14.2 FROM 18.88 TO THE BOTTOM END.
3. PRESS BOTH NUTS (HEADS INSIDE THE C), THEN TRIM THE TOP END BACK TO 6.5 FROM THE TOP NUT (PEM EDGE 7.1 WHILE PRESSING).
4. BEND 2X 90 DEG ROUND R1.0 INSIDE, BEND CL 12.31 AND 47.94 FROM THE TOP END (K 0.33, 3.13 PER BEND); BEND 1 ON THE TONGUE ONLY, LIPS STAY FLAT. CHECK THE FIRST PART.
5. FIRST ARTICLE (N15): ONE SAMPLE STRAP, M5 x 10 INTO EACH NUT AT 6 N.m (1.5 x 4 N.m); NUT MUST NOT TURN OR PUSH OUT; SCRAP IT. BREAK EDGES 0.2-0.4 (R138), KEEP TIN ON CLAMP FACES.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
POWER OUTPUT C-STRAP 3 x 15 (FORMED + FLAT BLANK)

PART / DWG NO.	REV	MATERIAL
ST185-FB-117	**A.01**	C110 COPPER, TINNED

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1.5:1	mm	B (11x17)	1 OF 1	2026-10-17	SteveCAD

SOURCE
Power_Strap_Out_CuC110_15x3_C.step (Fusion) + flat blank from spec.strap_blank() (build123d)

3RD ANGLE