

REVISIONS			
REV	DESCRIPTION	BY	DATE
G	#270: FB-108 base E, FB-109 cover E	Claude	16/10/26
H	#271: FB-108 base F, FB-109 cover F	Claude	16/10/26
J	#272: FB-111 bar C, FB-112 pad B	Claude	16/10/26
K	#277: FB-108 base G	Claude	17/10/26
M	#297: FB-108 base H, FB-112 pad C	Claude	18/10/26
N	#303: FB-108 base J, FB-109 cover G; first assembly drawing (buildability review 18/10/26)	Claude	18/10/26




TRIMETRIC VIEW

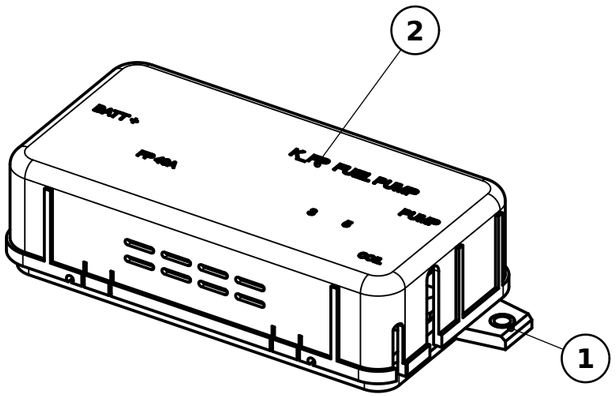

TRIMETRIC - COVER REMOVED

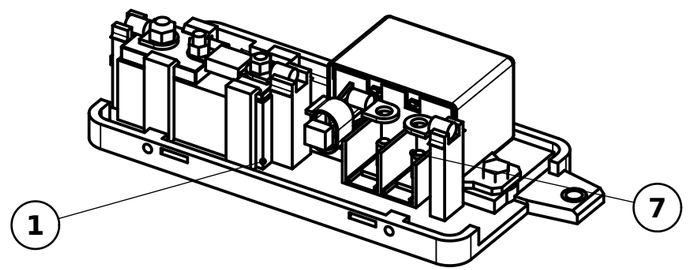

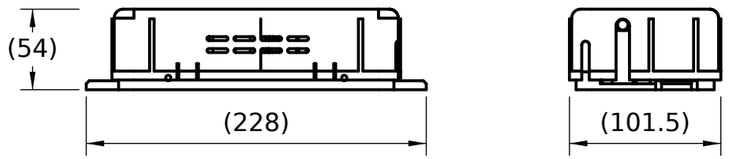

FRONT / TOP / RIGHT VIEWS SCALE 1:4

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL / SPEC
1	1	ST185-FB-108	BATTRELAY BASE	PA12, 3D PRINTED
2	1	ST185-FB-109	BATTRELAY COVER	PA12, 3D PRINTED
3	3	94459A140	M3 HEAT-SET INSERT (OPTIONAL COVER BACKUP) (NOT SHOWN)	BRASS
4	3	SSCF-M3-10-A4	M3 x 10 CAP SCREW (OPTIONAL COVER BACKUP) (NOT SHOWN)	A4 STAINLESS
5	1	ST185-FB-111	BAR 25.4 X 6.35 X 36.5 MM, TINNED	C110 Cu, TINNED
6	1	ST185-FB-112	PAD 25.4 X 3.2 X 15.5 MM, TINNED	C110 Cu, TINNED
7	1	1416010-1	FUEL PUMP RELAY K_FP	PURCHASED
8	1	282080-1	COIL PLUG HOUSING, SUPERSEAL 1.5, 2 POLE	PURCHASED
9	2	282110-1	COIL PLUG CONTACT (NOT SHOWN)	PURCHASED
10	2	281934-2	COIL PLUG WIRE SEAL (NOT SHOWN)	PURCHASED
11	1	AMI-40	AMI BOLT-DOWN FUSE 40 A (FP)	PURCHASED
12	3	Klauke 1R6	RING LUG 6 mm², M6 / 10 mm² M5 (4 LUGS)	Cu, TINNED
13	1	Klauke 2R5	TUBULAR LUG 10 MM2, M5 HOLE (SEE NOTE 2) (NOT SHOWN)	Cu, TINNED
14	3	RS 190-169	HEX BOLT M6 X 16 (FEED STUD, 2 FLANGE BOLTS)	A4 STAINLESS
15	3	RS 527-274	HEX NUT M6 / KEPS M5 (ALL NUTS)	A2 STAINLESS
16	3	RS 287-3962	PLAIN WASHER M6 (FEED STUD, 2 FLANGE BOLTS) (NOT SHOWN)	A2 STAINLESS
17	1	RS 263-2205	HEX BOLT M5 x 16 / M5 x 12 / M6 FEED STUD	A2 STAINLESS
18	2	RS 264-6432	KEPS NUT M5 (AMI INPUT + OUTPUT EARS) (SEE NOTE 2) (NOT SHOWN)	A2 STAINLESS
19	1	RS 484-0098	HEX BOLT M5 X 12 (AMI OUTPUT STUD (SEE NOTE 2) (NOT SHOWN)	A4 STAINLESS
20	2	EFC 10S00056	COMPRESSION LIMITERS (ALL 4)	STEEL, ZINC
21	2	EFC 10S00052	COMPRESSION LIMITER, HCR150 FLANGE BOSSE (SEE NOTE 2) (NOT SHOWN)	STEEL, ZINC

NOTES:

1. OVERALL SIZES ARE FOR REFERENCE.
2. PARTS THAT SHARE ONE MODEL (LUGS, NUTS, BOLTS, LIMITERS) ARE BALLOONED ON THE FIRST ITEM OF THEIR GROUP.
3. BAR AND PAD: PUSH EACH ONE DOWN PAST THE SNAP HOOKS UNTIL IT CLICKS, THEN BOLT IT.
4. SHEET 2: WHAT THE FUSE AND RELAY FEED, AND THE HARNESS WIRE AT EACH CONNECTION, NAMED AS ON THE HARNESS DRAWINGS.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
BATT RELAY BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100B	N.01	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:4	mm	B (11x17)	1 OF 3	2026-10-18	SteveCAD

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev7\\ST185_fusebox_rev7_assembly.step

3RD ANGLE

WHAT THE FUSE AND RELAY FEED, AND THE HARNESS WIRE AT EACH CONNECTION (COVER OFF)

TOP VIEW SCALE 1:2

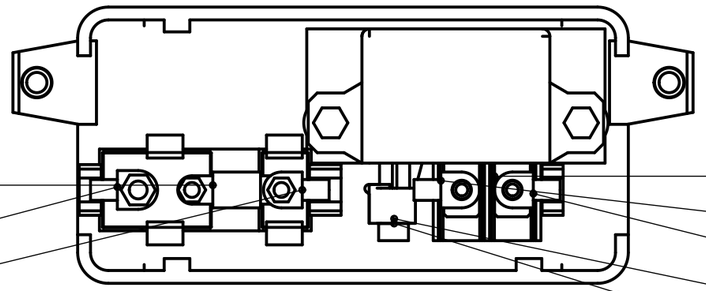

FP 40A - FUEL PUMP RELAY 30 **11**

BATT RLY BOX BATT + - M6 feed stud > KILL SWITCH MAIN 2 - Main pole out, load

BATT RLY BOX FP 40A - FP 40A fuse out > FP RELAY K1 30 - Relay 30 fused 12V

7 k_fp FUEL PUMP RELAY (HCR150)

k_fp 30 > BATT RLY BOX FP 40A - FP 40A fuse out

k_fp 87 > Fuel pump plug pin 1 (in the tank; RearFuel) - pump +12 V

k_fp 86 > SW12 splice after LOGIC Bus 2 pin 2 (glove box; CabinPower) - switched 12 V

k_fp 85 > ECU A pin 19 (Link ECU, center dash; A-cabin) - fuel pump relay drive

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
BATT RELAY BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100B	**N.01**	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:2	mm	B (11x17)	2 OF 3	2026-10-18	SteveCAD

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev7\\ST185_fusebox_rev7_assembly.step

3RD ANGLE


STEP 1: LIMITERS, FLANGE BOLTS, HCR150 RELAY

EXPLODED TRIMETRIC (NOT TO SCALE)

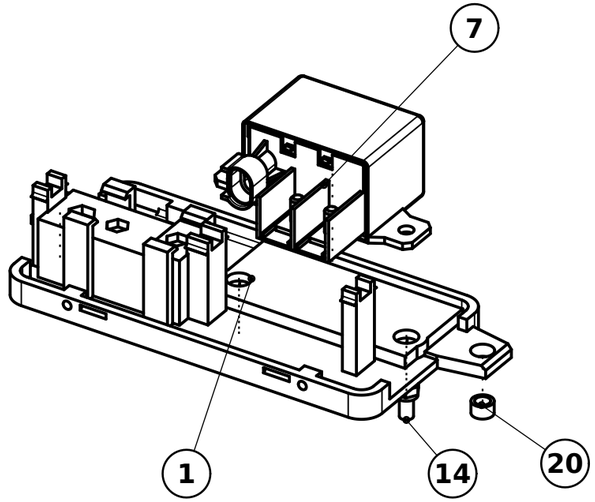


STEP 2: BAR, PAD, FUSE, STUDS, NUTS, LUGS

EXPLODED TRIMETRIC (NOT TO SCALE)

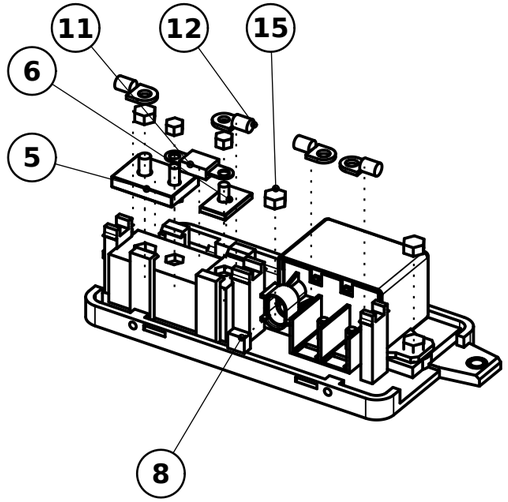

STEP 3: COVER

EXPLODED TRIMETRIC (NOT TO SCALE)

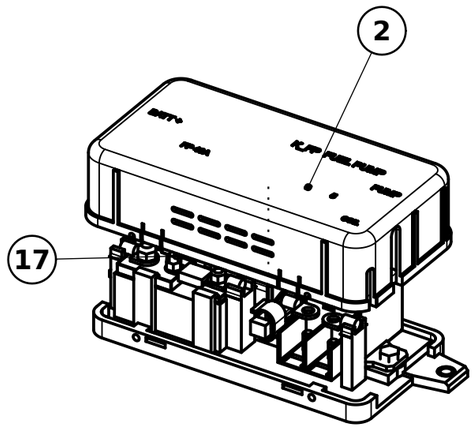

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
BATT RELAY BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100B	**N.01**	SEE BOM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
AS SHOWN	mm	B (11x17)	3 OF 3	2026-10-18	SteveCAD

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev7\\ST185_fusebox_rev7_assembly.step

3RD ANGLE