

REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	DG	14/10/26
B	Fairsolid rev 3 build (strut 71.77 -> 71.88 cm3)	DG	14/10/26
C	Fairsolid rev 4: strut reshaped so the pump sits at the OEM position	DG	14/10/26
D	Fairsolid rev 6: two through-slots in the strut arm	DG	14/10/26
E	Fairsolid rev 7: strut rechecked for the 2 g load (60.28 -> 64.66 cm3); first drawing issued (#279)	DG	14/10/26
F	Option B (B9): saddle/foot screws + keys, 0.5x45 chamfers on all edges, saddle key slot filled	DG	17/10/26

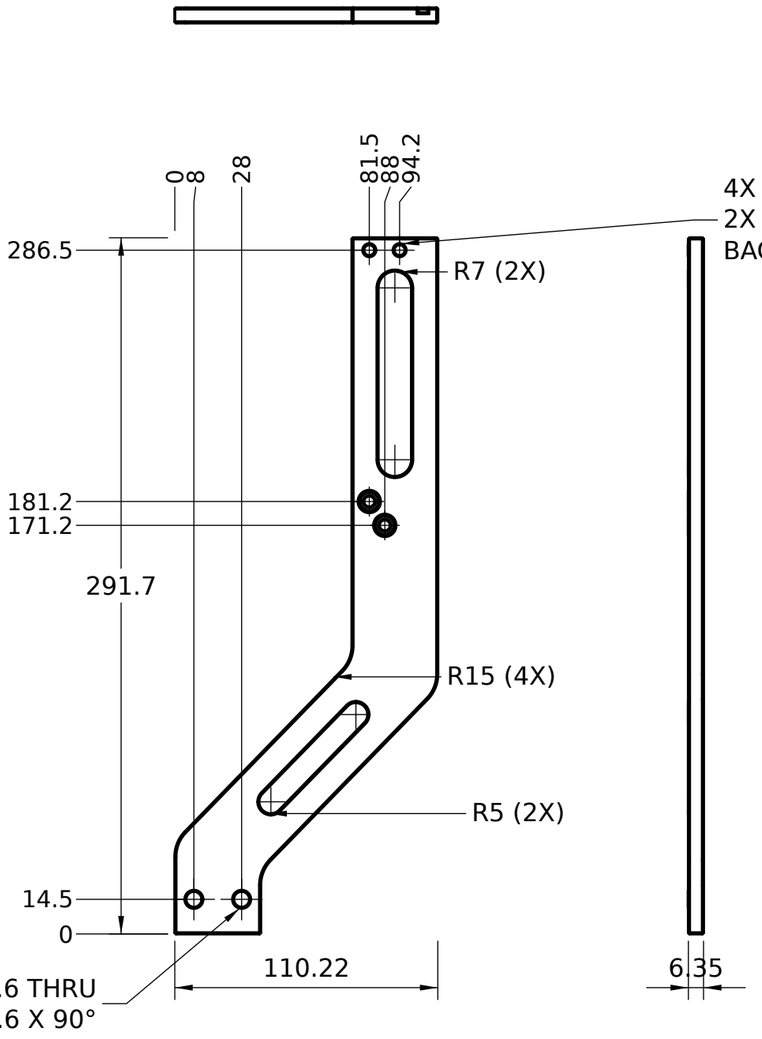

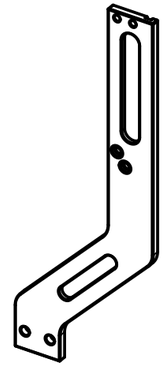

TRIMETRIC VIEW (SCALE 1:4)

NOTES:

1. 6061-T6 ALUMINUM BILLET. SPOT FACE EVERY TAPPED HOLE ENTRY 90°, AS WIDE AS THE THREAD.
2. EVERY EDGE HAS A 0.5 x 45° CHAMFER (IN THE MODEL). POCKET FLOOR CORNERS CAN STAY AS THE END MILL LEAVES THEM.
3. THE SIDE FACE AT THE SADDLE LOCATES THE FH-105 TAB: 22.22 / 28.72 FROM THE 2 M4 COUNTERSINK CENTRES, +0 / -0.05.
4. FIT THE TANK BULKHEAD NUTS BEFORE THE STRUT GOES ON.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
FUEL HANGER - STRUT

PART / DWG NO.	REV	MATERIAL
ST185-FH-103	**F.02**	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:2.5	mm	B (11x17)	1 OF 1	2026-10-19	DG

SOURCE: st185-link-ecu-config\cad\fuel-hanger\fuel-hanger-strut.step (build123d)

3RD ANGLE