


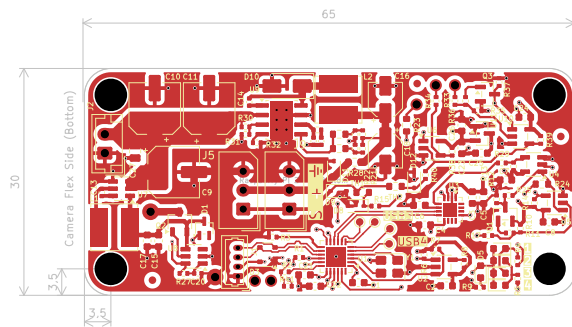

1,6 mm PCB thickness
35 um (1 oz) copper

PCB specifications (<https://jlcpcb.com/capabilities/pcb-capabilities>)

- via/holes: 0,2/0,45 mm
- Via Hole-to-Hole Spacing: 0,2 mm
- Min. track width and spacing (35 um) 0,10 / 0,10 mm
- Min. track width and spacing (70 um) 0,16 / 0,20 mm
- Inner layer via hole/PTH to copper clearance: 0,2 / 0,3 mm

Pollen Robotics / Hugging Face

Sheet:
File: elec_gripette_hub_and_dyn.kicad_pcb

Title: **Gripette – USB hub and Dynamixel device**

Size: A4	Date: 2026-05-27	Rev: B1
KiCad E.D.A. 9.0.9		Id: 1/1