

TDSE Simulation Parameters

Laser	
λ_{NIR}	799 nm
λ_{XUV}	46 nm
E_{XUV}	27.2 eV (H18)
I_{NIR}	$5.61e+13$ W/cm ²
I_{XUV}	$3.16e+13$ W/cm ²
U_p	0.1231 a.u. = 3.35 eV
Δk	0.702 a.u.
T_{prop}	125 a.u. = 3.0 fs
Coherent-State Sampling	
Mode	Husimi-Q (diagonal)
N_α	1
Scan	
N_τ	8
τ_{min}	$0.0000e+00$ a.u.
τ_{max}	110.2640 a.u.
k_{min}	0.0050 a.u.
k_{max}	2.4376 a.u.
N_k	40
N_θ	21
Numerical Grid	
r_{max}	60 a.u.
Δt	0.0500 a.u.
N_{steps}	2500
N_{elem}	15
N_{Lobatto}	5
ℓ_{max}	6
Z_{eff}	1
Projection	Coulomb

prefix: prj $N_\tau = 8$ $N_\alpha = 1$

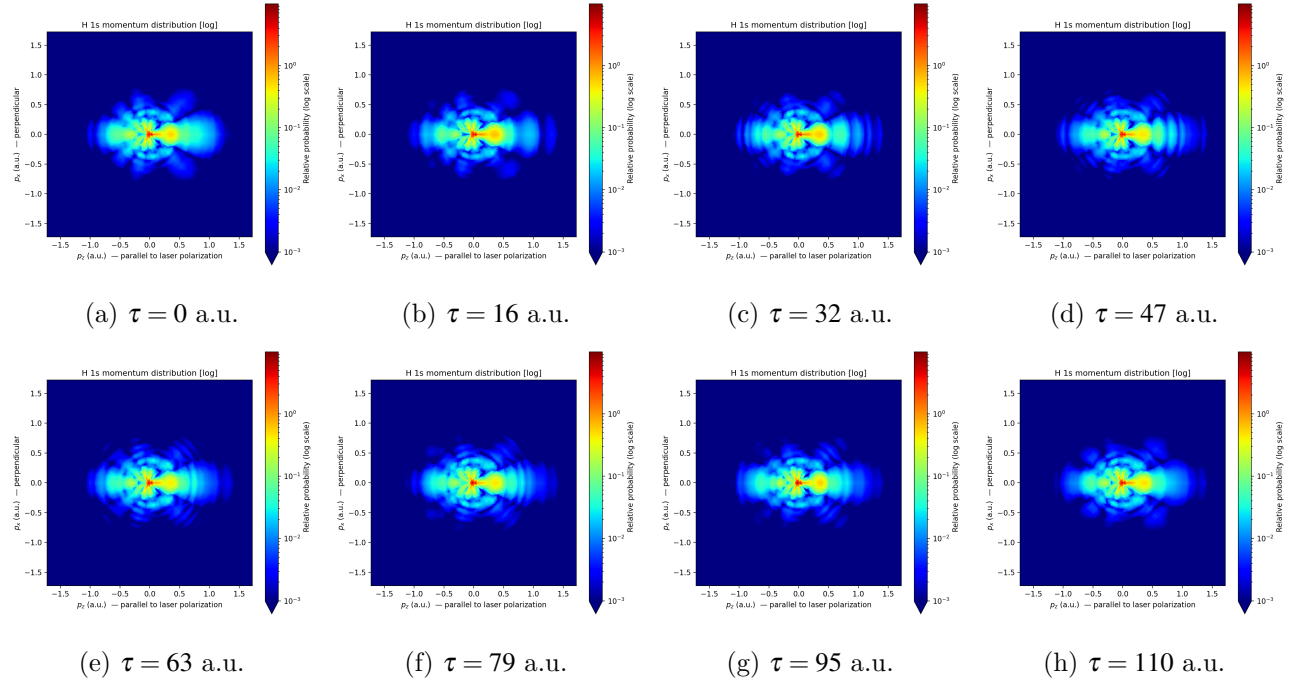


Figure 1: Photoelectron momentum distributions at each time delay. $N_\alpha = 1$, Husimi-Q (diagonal).