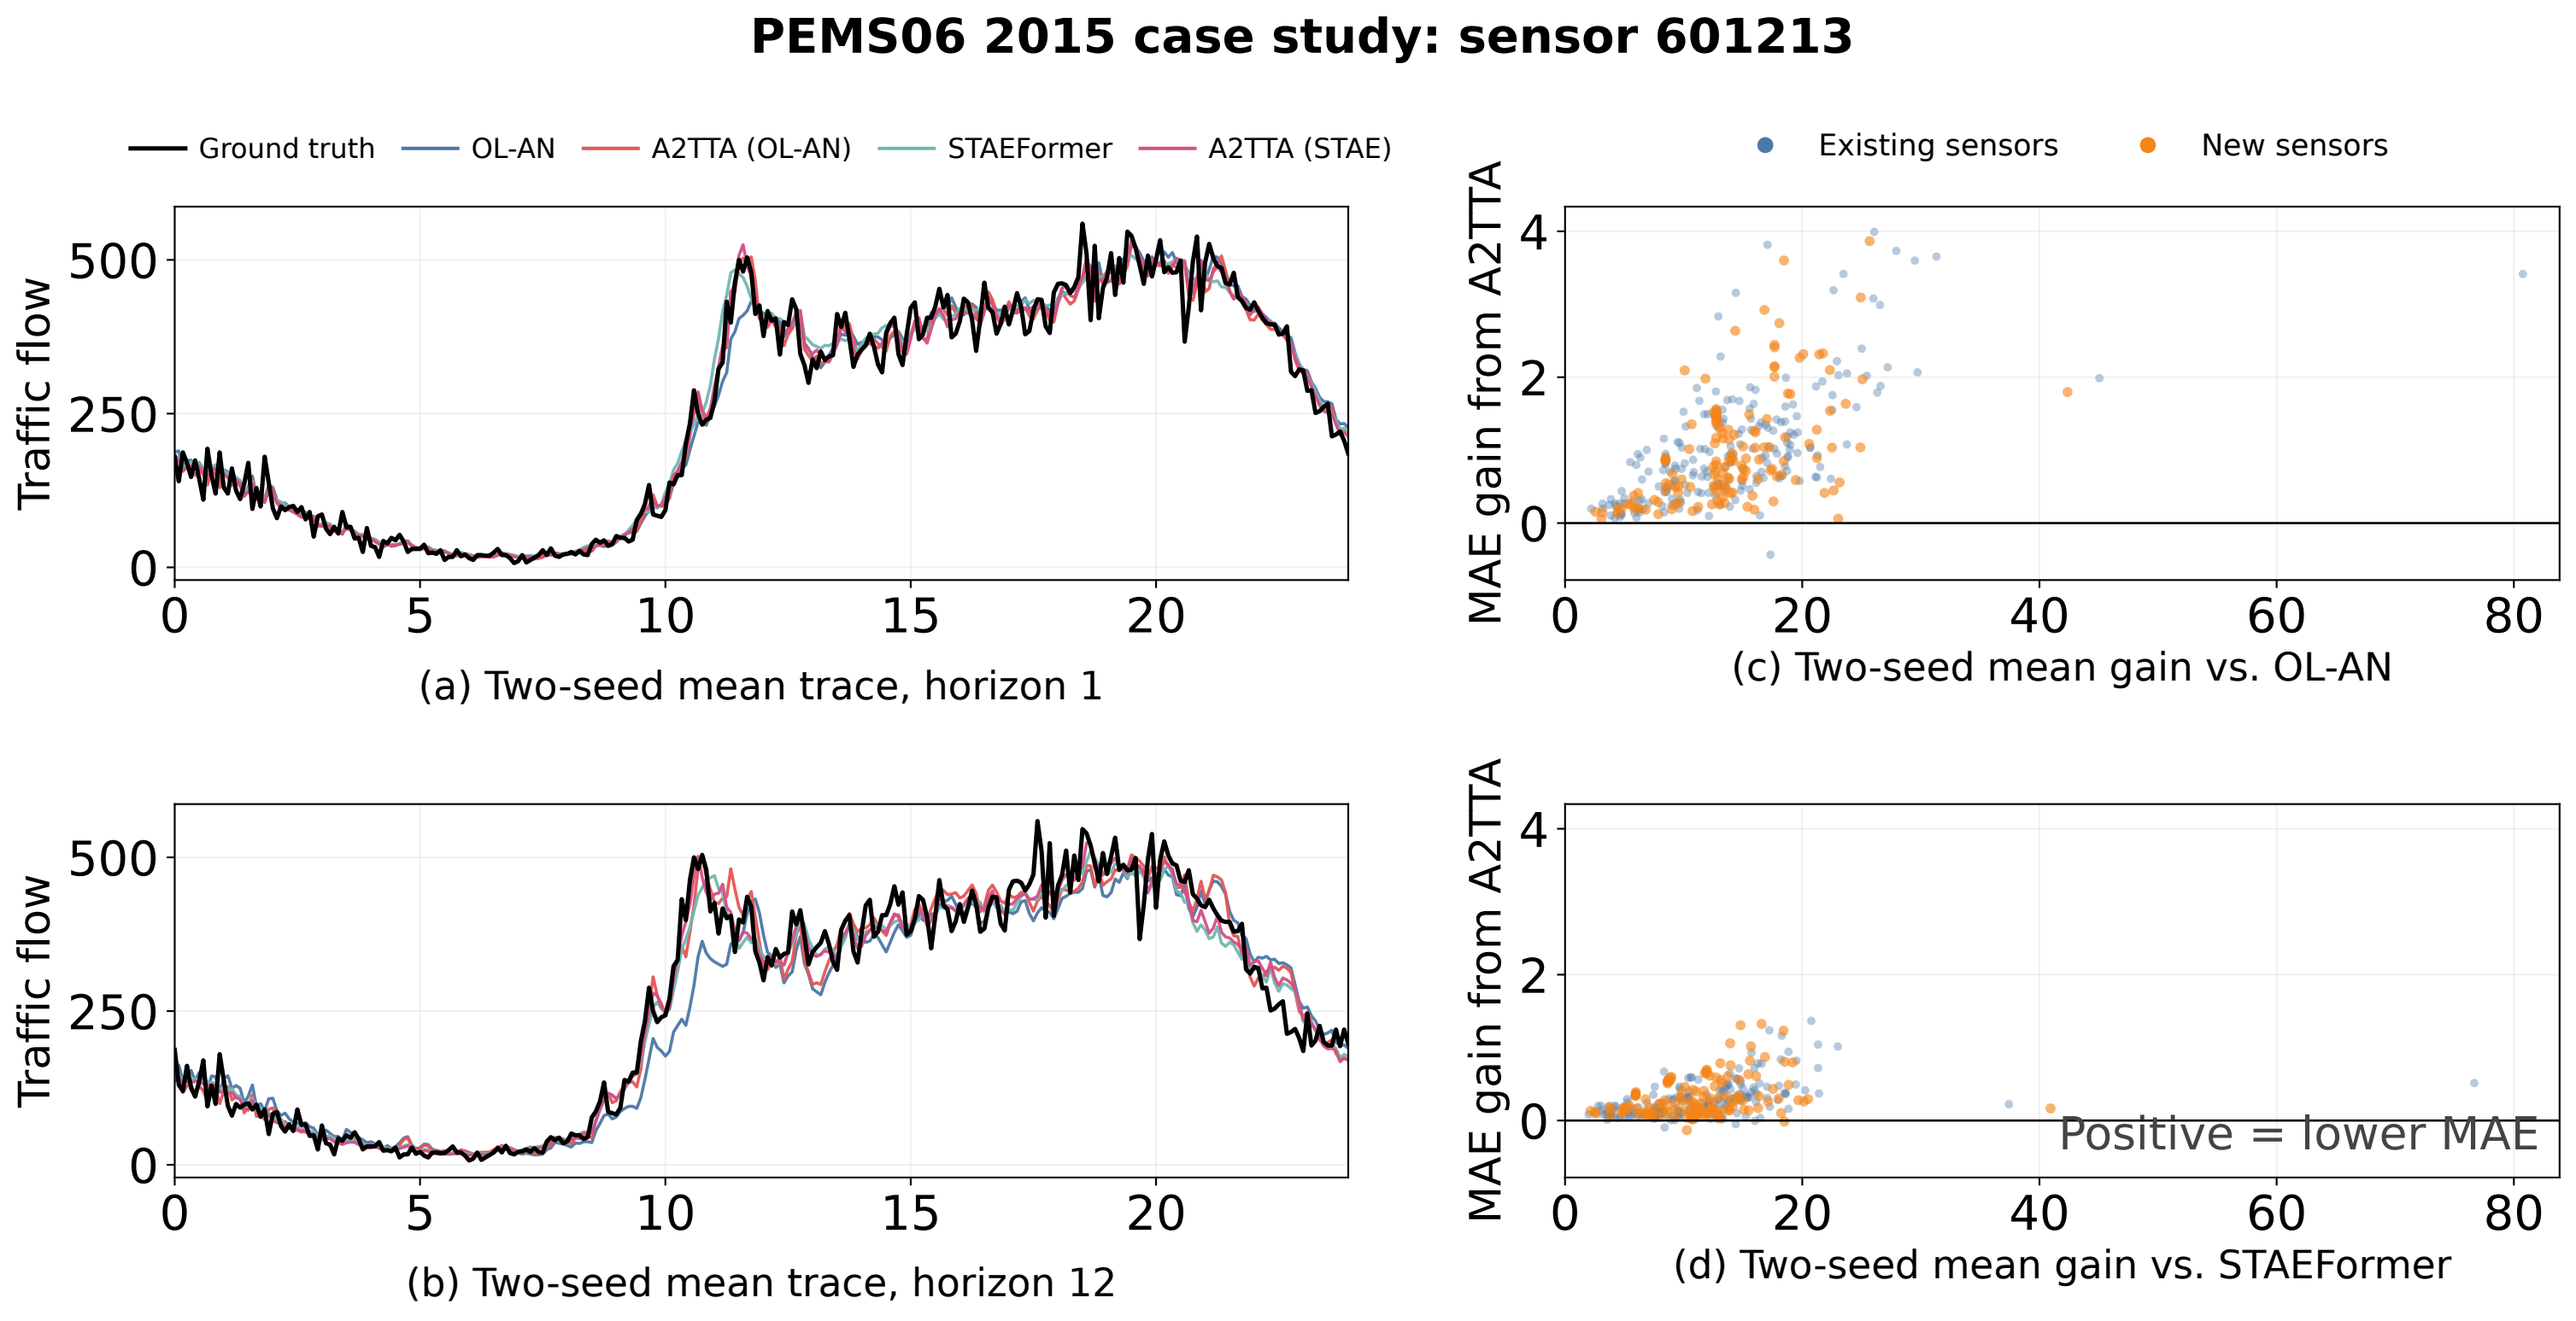

PEMS06 2015 case study: sensor 601213
Ground truth
OL-AN
A2TTA (OL-AN)
STAEFormer
A2TTA (STAE)
Traffic flow
0
250
500
0
5
10
15
20
(a) Two-seed mean trace, horizon 1
Traffic flow
0
250
500
0
5
10
15
20
(b) Two-seed mean trace, horizon 12
Existing sensors
New sensors
MAE gain from A2TTA
0
2
4
0
20
40
60
80
(c) Two-seed mean gain vs. OL-AN
MAE gain from A2TTA
0
2
4
0
20
40
60
80
Positive = lower MAE
(d) Two-seed mean gain vs. STAEFormer