

Software Requirements Specification for Time_Freq_Analysis: A program for time-frequency transforms of 1D systems

Elizabeth Hofer

December 28, 2020

Contents

Revision History

Date	Version	Notes
04.11.2020	1.0	Initial Release

1 Reference Material

This section records information for easy reference.

1.1 Table of Units

Throughout this document SI (Système International d’Unités) is employed as the unit system. In addition to the basic units, several derived units are used as described below.

symbol	unit	SI
s	time	second

Additionally, *frequency*, is derived as the cycles of a repeating signal per second, and its units hertz are: $Hz = 1/s$ pertaining to ‘cycles per second’.

1.2 Table of Symbols

The table that follows summarizes the symbols used in this document along with their units. The symbols are listed in alphabetical order.

symbol	unit	description
$x(n)$	N/A	discrete signal input
n	N/A	discrete time
N	N/A	the number of samples in a signal, i.e. $x(n)$ for $n[0, \dots, N]$
f	Hz	frequency
ω	Hz	frequency
i	N/A	the imaginary number s.t. $i^2 = -1$
$w(n)$	N/A	window function
$\phi(t)$	N/A	wavelet function
$X(\omega)$	N/A	Fourier transform of a signal $x(n)$
$X(n, \omega)$	N/A	short time Fourier transform of a signal $x(n)$
$\langle x, y \rangle$	N/A	convolution between x and y
P	s	sampling period of a discrete signal

1.3 Abbreviations and Acronyms

symbol	description
A	Assumption
DD	Data Definition
GD	General Definition
GS	Goal Statement
IM	Instance Model
LC	Likely Change
PS	Physical System Description
R	Requirement
SRS	Software Requirements Specification
STFT	Short Time Fourier Transform
Time_Freq_Analysis	A program for computing a time frequency analysis of a signal
T	Theoretical Model

2 Introduction

Vibrating Screens are large machines used in the mining and aggregate industry to sort aggregate (i.e. gravel) by size. The machines excite the aggregate by vibrating in specific patterns. For the purpose of further research, accelerometers were placed on the machines and the vibrations were recorded. It is hypothesized that there is useful information within the vibrations, for example, the vibrations could hold a unique machine fingerprint or indicate if a part of the machine needs to be replaced. However, the current form of the recording of the vibration, a one dimensional signal, is not ideal for reading that information or for further analysis (such as a statistical analysis or creating a support vector machine). Retrieving the time-frequency content of the recording data (i.e. identify what frequencies occur at what time instance of the sample) is preferred for further analysis. The time-frequency representation can be visualized when plotted as a heat map, as shown in figure 1.

The introduction will review the purpose of this document, the scope of the requirements for this program, the characteristics of the indented reader, the organization of this complete document, the general system description, the system context, the characteristics of the indented user, and the constraints of the system.

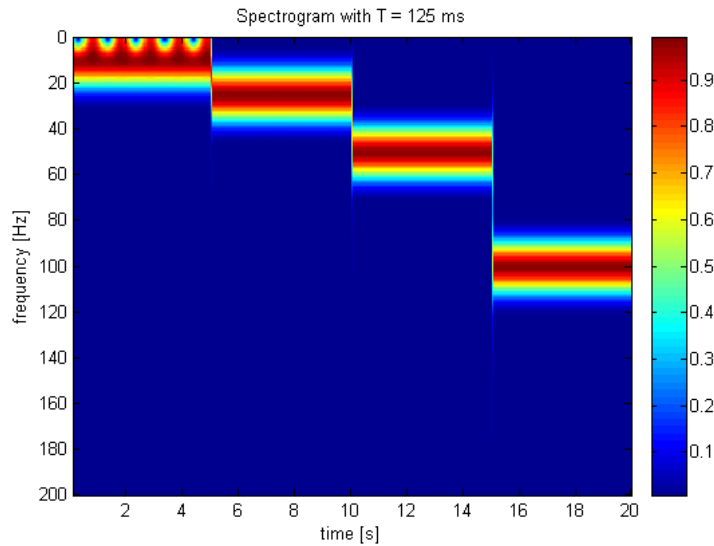


Figure 1: Example of a time-frequency transform represented as a heat-map

2.1 Purpose of Document

The purpose of this document is to provide insight on the construction and functionality of Time.Freq.Analysis to the Intended Reader (Section 2.3). This document should clearly communicate all necessary background information and context to the Intended Reader such that they can understand the domain in which the project takes place.

2.2 Scope of Requirements

The domain of this problem is restricted to one dimensional signal inputs. In a practical application, the inputs are intended to be accelerometer data collected by Haver and Beocker Canada. However, restricting the domain to one specific type of input data is unnecessary for this program, specifically as Time_Freq_Analysis is intended to be one tool used within a larger process. Also, only considering the data collected by Haver and Beocker Canada would pose a considerable challenge for verification. Therefore, it has been decided to scope Time_Freq_Analysis input into any one dimensional signal input (which includes a vibration recording from the accelerometer as mentioned previously, but also be any other one dimensional signal).

Subsequently, since this project is limited to any one dimensional input and not limited to physical data collected by Haver and Beocker Canada, any qualities of the physical data collection (e.x missing data points in a recording, flawed recording, noise in recording) are considered out of scope. Essentially, while this program is intended to eventually be used within the context of specific physical data, it is developed and constructed independently and abstractly from that data.

2.3 Characteristics of Intended Reader

The intended reader should have a good understanding of signal processing and Fourier transforms, ideally with a graduate level class in the area.

2.4 Organization of Document

This document includes a general system description where the system is describe in the way that it interacts between the user and the environment, a specific system description which will describe elements of the problem and the tools used to solve the problem in detail, a requirements section, a section on likely changes, and a section on traceability.

3 General System Description

This section provides general information about the system. It identifies the interfaces between the system and its environment, describes the user characteristics and lists the system constraints.

3.1 System Context

The system context is shown in Figure 2 below. The circles represent the user, who is both responsible for handling the inputs and the outputs. The box represents the program itself, and the arrows indicate what data and information is passed from the user to the program.

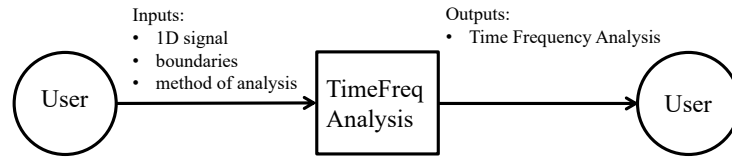


Figure 2: System Context

- User Responsibilities:

- Provide the input data including a file of the signal to be analysed, the sampling period, the time boundaries of that signal, and the type of transform to be performed.
- Ensure input signal is in correct format.
- Enter other input variables if defaults are not appropriate.

- Time_Freq_Analysis Responsibilities:

- Detect data type mismatch, such as a string of characters instead of a floating point number.
- Detect if input data sample is too short for analysis.
- Ensure analysis boundaries are an appropriate size for the sample.
- Calculate the output.

3.2 User Characteristics

The end user of Time_Freq_Analysis should have a good understanding of signal processing and Fourier transforms, ideally with a graduate level class in the area.

3.3 System Constraints

There are no known constraints for this system at the present time.

4 Specific System Description

This section first presents the problem description, which gives a high-level view of the problem to be solved. This is followed by the solution characteristics specification, which presents the assumptions, theories, definitions and finally the instance models.

4.1 Problem Description

Time_Freq_Analysis is a computer program that is intended to transform any one dimensional signal into a two dimensional time-frequency representation of that signal, time localizing the frequencies of the signal.

4.1.1 Terminology and Definitions

This subsection provides a list of terms that are used in the subsequent sections and their meaning, with the purpose of reducing ambiguity and making it easier to correctly understand the requirements:

- Time-frequency analysis/transform - Representing and understanding a 1D signal by its time localized frequency content.
- Short Time Fourier Transform - A method of time-frequency transform using discrete Fourier transforms.
- Wavelet - A function that represents a portion of a ‘wave’ or periodic function, it is mainly 0 over its domain expect for around 0, the maximum amplitude should be 1.
- Wavelet Transform - A method of time-frequency transform using wavelets.

4.1.2 Goal Statements

Given a one dimensional input signal, a minimum frequency, a maximum frequency, and a time period within the recording the goal is:

GS1: Compute the time frequency transformation of the data.

4.2 Solution Characteristics Specification

The instance models that govern Time_Freq_Analysis are presented in Subsection ???. The information to understand the meaning of the instance models and their derivation is also presented, so that the instance models can be verified.

4.2.1 Assumptions

This section simplifies the original problem and helps in developing the theoretical model by filling in the missing information for the physical system. The numbers given in the square brackets refer to the theoretical model [T], general definition [GD], data definition [DD], instance model [IM], or likely change [LC], in which the respective assumption is used.

- A1: The input signal is longer than the time period over which the time-frequency analysis is computed (Ref by DD??, IM??, LC??).
- A2: The minimum frequency of the analysis is significantly larger than the sampling frequency of the input signal (Ref by DD??,DD??, ,IM??, LC??).
- A3: The maximum frequency of the analysis is significantly smaller than the $1/P$ where P is the time period of the analysis (Ref by DD??, IM??, LC??).
- A4: The recording of the signal is an accurate representation of the signal it represents, it is not missing data points nor does it contain anomalies.(Ref by DD??, IM??).
- A5: A morelet wavelet will be a sufficient wavelet to compute the time-frequency analysis of a signal $x(n)$. Currently, it is the only wavelet being considered for the wavelet transform, but there are other options available (Ref by IM??, LC??, LC??).
- A6: The discrete sampling period of the signal $x(n)$ is known (Ref by DD??, IM??).

4.2.2 Theoretical Models

This section focuses on the general equations and laws that Time_Freq_Analysis is based on.

Number	T1
Label	Discrete-time Fourier transform
SI Units	N/A
Equation	$X(\omega) = \sum_{n=0}^{N-1} x(n)e^{-i\omega n}$
Description	The discrete-time Fourier transform transforms a discrete signal $x(n)$ of finite length $n[0, \dots, N]$ into a function of frequency $X(\omega)$. N is the length of the signal, n is the unitless discrete time step, and ω is the frequency.
Source	https://cpb-us-w2.wpmucdn.com/sites.gatech.edu/dist/5/462/files/2016/08/DFT-of-Noise.pdf
Ref. By	T??

Number	T2
Label	Short Time Fourier Transform (Discrete)
Equation	$X(n, \omega) = \sum_{m=-\infty}^{\infty} x(m)w(m-n)e^{-i\omega m}$
Description	The above equation of represents the transformation from a signal $x(n)$ to a function $X(n, \omega)$ which gives the frequency content of frequency ω at discrete time n . $w(m)$ is the <i>analysis window</i> which is normalized such that $w(0) = 1$ and $w(m \rightarrow \infty) = w(m \rightarrow -\infty) = 0$. Note that practically it is not possible to take the sum from $m = -\infty$ to $m = \infty$ so this theoretical model will have a more practical implementation.
Source	https://en.wikipedia.org/wiki/Short-time_Fourier_transform#/media/File:STFT_colored_spectrogram_125ms.png , ?
Ref. By	DD??

Number	T3
Label	Wavelets and their properties
Equation	Let $\psi(t)$ represent the mother wavelet. The child wavelets are $\psi_{a,b}(t) = \frac{1}{\sqrt{a}}\psi(\frac{t-b}{a})$ where a is positive and defines the scale and b is a real number that defines the shift.
Description	A wavelet is a brief oscillation constructed from any periodic function. Child wavelets are versions of the mother wavelet that have been scaled and shifted in time.
Source	https://cpb-us-w2.wpmucdn.com/sites.gatech.edu/dist/5/462/files/2016/08/DFT-of-Noise.pdf
Ref. By	DD??

4.2.3 Data Definitions

This section collects and defines all the data needed to build the instance models.

Number	DD1
Label	Morlet Wavelets
Symbol	$\psi_{Mor}(t)$
Equation	$\psi_{Mor}(t) = \pi^{-\frac{1}{4}} e^{i\omega_0 t} e^{-\frac{t^2}{2}}$
Description	A Morelet wavelet is a common of wavelet for wavelet transforms as outlined in IM ???. It is a complex valued wavelet consisting of a sine wave modulated by a Gaussian curve.
Source	https://paos.colorado.edu/research/wavelets/wavelet2.html
Ref. By	DD??
Number	DD2
Label	Matrix representation of STFT
Equation	<p>for a signal $x(n)$ with a corresponding STFT $X(n, \omega)$ the matrix representation is</p> $M(x(n)) = \begin{bmatrix} X(n_0, \omega_0) & X(n_1, \omega_0) & \dots & X(n_N, \omega_0) \\ X(n_0, \omega_1) & X(n_1, \omega_1) & \dots & X(n_N, \omega_1) \\ \vdots & \vdots & \ddots & \vdots \\ X(n_0, \omega_F) & X(n_1, \omega_F) & \dots & X(n_N, \omega_F) \end{bmatrix}$
Description	For a signal $x(n)$ the matrix at $M_{a,b}(x(n)) = X(n_a, \omega_b)$. The frequency ω_0 will be the minimum frequency that should be analysed and ω_F will be the maximum frequency that should be analysed, with the remaining frequencies evenly spaced intervals.
Source	N/A
Ref. By	DD??

Number	DD3
Label	Matrix representation of Wavelet Transform
Equation	<p>The wavelet coefficients are $WT_\psi\{f(n)\}(a, b) = \langle f, \psi_{a,b} \rangle$. Thus, the matrix representation will be</p> $M(x(n)) = \begin{bmatrix} \langle f, \psi_{n_0, \omega_0} \rangle & \langle f, \psi_{n_1, \omega_0} \rangle & \cdots & \langle f, \psi_{n_N, \omega_0} \rangle \\ \langle f, \psi_{n_0, \omega_1} \rangle & \langle f, \psi_{n_1, \omega_1} \rangle & \cdots & \langle f, \psi_{n_N, \omega_1} \rangle \\ \vdots & \vdots & \ddots & \vdots \\ \langle f, \psi_{n_0, \omega_F} \rangle & \langle f, \psi_{n_1, \omega_F} \rangle & \cdots & \langle f, \psi_{n_N, \omega_F} \rangle \end{bmatrix}$
Description	The wavelet coefficients can be assembled into a matrix for a time-frequency representation of the signal. The frequency ω_0 will be the minimum frequency that should be analysed and ω_F will be the maximum frequency that should be analysed, with the remaining frequencies evenly spaced intervals.
Source	https://en.wikipedia.org/wiki/Wavelet
Ref. By	DD??

4.2.4 Instance Models

This section transforms the problem defined in Section 4.1 into one which is expressed in mathematical terms. It uses concrete symbols defined in Section ?? to replace the abstract symbols in the models identified in Section 4.2.2.

The goal statement 4.1.2 is solved by IM??.

Number	IM1
Label	Time-frequency representation of a signal $x(n)$
Input	$x(n)$, T , n_i , Δ_n , ω_{min} , ω_{max} and a method to compute the time frequency representation T where $T \in S, W$, S for a STFT and W for a wavelet transform.
Output	$M(x(n))$ from $n[n_i, \dots, n_i + \Delta_n]$ and from $\omega[\omega_{min}, \dots, \omega_{max}]$
Description	$x(n)$: discrete input signal of length N , $n[0, \dots, N]$ P : sampling period of $x(n)$ (s) n_i : discrete time within signal to begin time-frequency transform Δ_n : the length of the time period over which the transform is performed. ω_{min} : the minimum frequency analysed for the transform (Hz). ω_{max} : the maximum frequency analysed for the transform (Hz). $M((x(n)))$: the matrix representing of the time-frequency transform of $x(n)$.
Sources	N/A
Ref. By	R??, R??, R??

4.2.5 Input Data Constraints

Table ?? shows the data constraints on the input output variables. The column for physical constraints gives the physical limitations on the range of values that can be taken by the variable. The column for software constraints restricts the range of inputs to reasonable values. The software constraints will be helpful in the design stage for picking suitable algorithms. The constraints are conservative, to give the user of the model the flexibility to experiment with unusual situations. The column of typical values is intended to provide a feel for a common scenario. The uncertainty column provides an estimate of the confidence with which the physical quantities can be measured. This information would be part of the input if one were performing an uncertainty quantification exercise.

- (*) The input discrete time indexes and frequencies do not have an uncertainty in the context of this project. They are merely the boundaries for the time-frequency transformed to be performed within, it would not effect the accuracy of the transform, just the portion of the signal it is performed upon.
- (**) P is determined by the method of recording/sampling. It is not chosen by the user but the user must specify it.

Table 1: Input Variables

Var	Physical Constraints	Software Constraints	Typical Value	Uncertainty
n_i	$0 \leq n_i \leq (N - \Delta_n)$	N/A	26	N/A*
Δ_n	$0 < \Delta_n, t_i + \Delta_n \leq N$	N/A	2000	N/A*
ω_{min}	$0 < \omega_{min} \ll \omega_{max}$	$1/\Delta_n \ll \omega_{min} \ll 1/P$	2 Hz	N/A*
ω_{max}	$\omega_{min} \ll \omega_{max}$	$1/\Delta_n \ll \omega_{max} \ll 1/P$	200 Hz	N/A*
$x(n)$	N/A	$x_{min} \leq x(n) \leq x_{max}$ for all n	0.03627	10%
P	$P > 0$	N/A	0.25 s	10%

4.2.6 Properties of a Correct Solution

The output of this Time-Freq-Analysis is a time-frequency *representation* of a 1D signal. What is important to recognize is that a ‘representation’ really could be anything, and therefore what could be considered a ‘correct solution’ is quite diverse and subjective. A correct solution should look like a heat map when graphed, essentially the matrix values should not be ‘random’ or sporadically scattered, and there should be ‘clusters’ at the prominent frequencies at the time they occur. The output should obviously be consistent for the same input signal and similar for similar input signals, which seems trivial but will be useful when testing to determine what a correct output can be defined as. Expressed in table ?? any one value in a transform cannot be greater than the value of the signal itself, at the same time n , since that would violate the principals of transforms outlined by T1, T??, and T??.

Table 2: Output Variables

Var	Physical Constraints
$M_{a,b}$	$M_{n,b} \leq x(n)$

5 Requirements

This section provides the functional requirements, the business tasks that the software is expected to complete, and the nonfunctional requirements, the qualities that the software is expected to exhibit.

5.1 Functional Requirements

R1: Program shall take the signal to be analyzed as input. All other inputs (as specified in table ??) will have defaults, but program shall accept user inputs for those as well (IM ??).

R2: Program shall notify user if an input value is illegal or out of bounds (IM ??).

R3: The output shall be a time frequency representation of the signal in the specified time

5.2 Nonfunctional Requirements

- R6: Program shall plot time-frequency representation as a heat map.
- R7: The time complexity for this program should be $O(n)$,
- R8: Program will not have a graphical user interface but should still be easy to use, the input parameters besides the signal shall all have default values, there should be at most 6 optional inputs.
- R9: The program code should be clear and readable.
- R10: The program should easily integrate with other software programs.

6 Likely Changes

- LC1: Currently there is only one option for type of wavelet: a Morlet wavelet. Depending on the resources available, the type of wavelet could be specified, as many different wavelets exist that all do slightly different things. This will have to be added as an input IF the user chooses wavelet transform for the input T as in table ?? . Essentially, this would be a conditional input, only if the user selects wavelet transform. Per assumption A5.
- LC2: σ a parameter used by the Morlet wavelet transform ?? can not be set by the user, as the end goal of this program is to analyse a large among of similar signals and then compare them, and σ should remain constant for all of those signals. However, it may be beneficial for the user to be able to input this parameter to find the best time-frequency resolution for their problem.
- LC3: Currently, the user specifies the following four input parameters: n_i , Δ_n , ω_{min} and ω_{max} . However, this could lead to the user inputting inappropriate values for the sample. A time-frequency at too small an interval will not yield useful results, but this depends on the content of the sample itself, so it cannot be a parameter set by the system. However, it might be fit to restrict the range of these input values more then they already are.

7 Traceability Matrices and Graphs

The purpose of the traceability matrices is to provide easy references on what has to be additionally modified if a certain component is changed. Every time a component is changed, the items in the column of that component that are marked with an “X” may have to be modified as well. Table ?? shows the dependencies of theoretical models, general definitions, data definitions, and instance models with each other. Table ?? shows the dependencies

of instance models, requirements, and data constraints on each other. Table ?? shows the dependencies of theoretical models, general definitions, data definitions, instance models, and likely changes on the assumptions.

	T1	T??	T??	DD??	DD??	DD??	IM??
T1			X		X		
T??						X	
T??	X				X		
DD??					X		
DD??	X		X				X
DD??		X					X
IM??				X	X	X	

Table 3: Traceability Matrix Showing the Connections Between Items of Different Sections

	IM??
R??	X
R??	X
R??	X
R??	X
R??	X

Table 4: Traceability Matrix Showing the Connections Between Requirements and Instance Models

	A1	A2	A3	A??	A5	A6
T1						
T??		X	X			
T??		X	X	X		X
DD??						
DD??	X					
IM??						
IM??	X	X	X	X	X	X
LC??					X	
LC??						
LC??	X	X	X			

Table 5: Traceability Matrix Showing the Connections Between Assumptions and Other Items

References