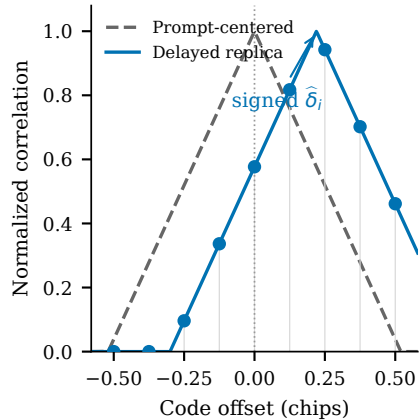
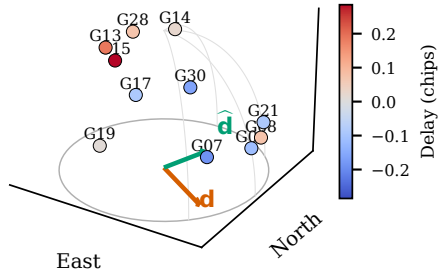


(a) Nine-tap signed-delay sensor**(b) Held-out receiver-RF LOS geometry****(c) One displacement explains spoof delays**