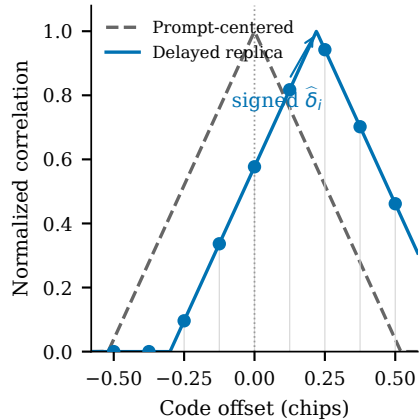
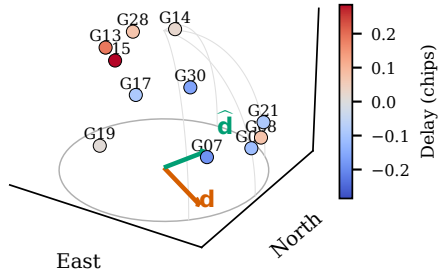


**(a) Nine-tap signed-delay sensor****(b) Held-out receiver-RF LOS geometry****(c) One displacement explains spoof delays**