
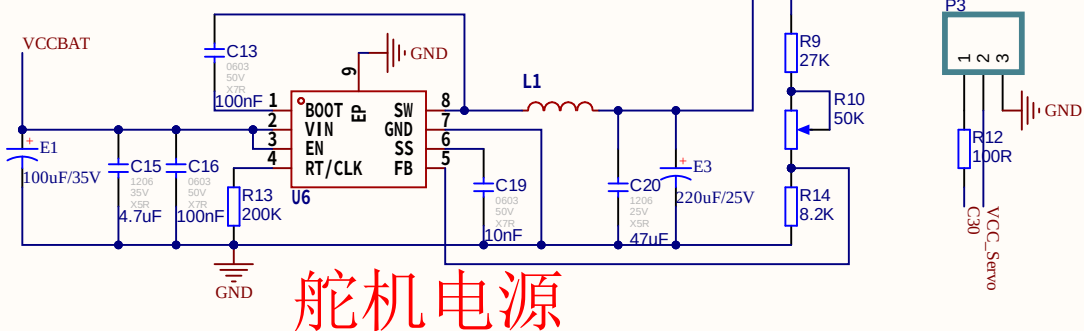

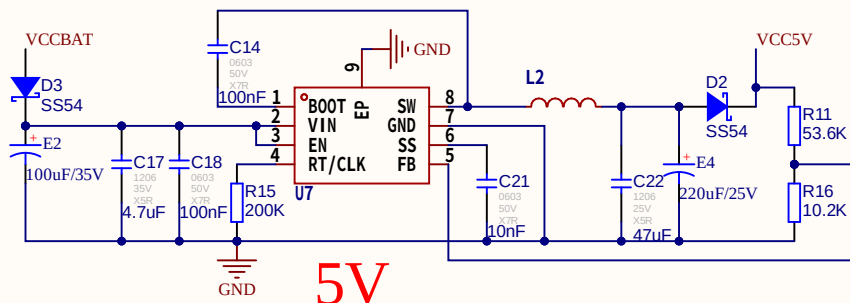


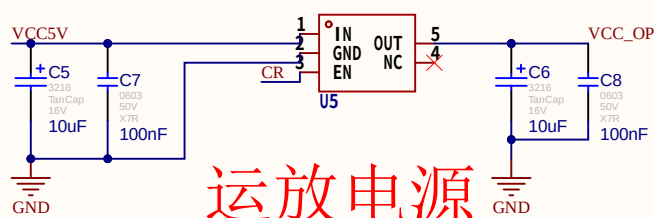

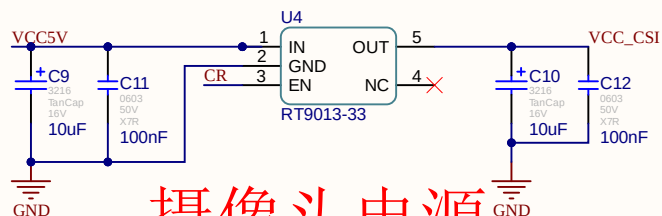

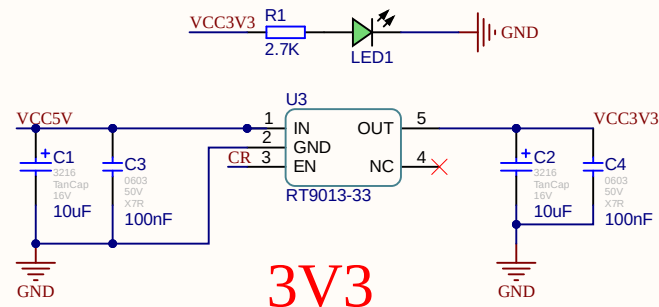

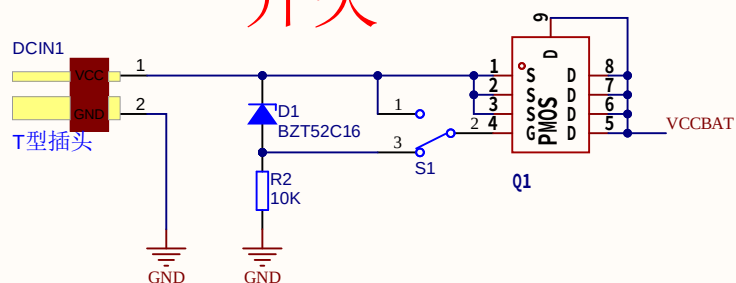


Title			
Size A4	Number		Revision
Date:	1/13/2025	Sheet of	
File:	E:\AD_Projects\...\Sheet4.SchDoc	Drawn By:	

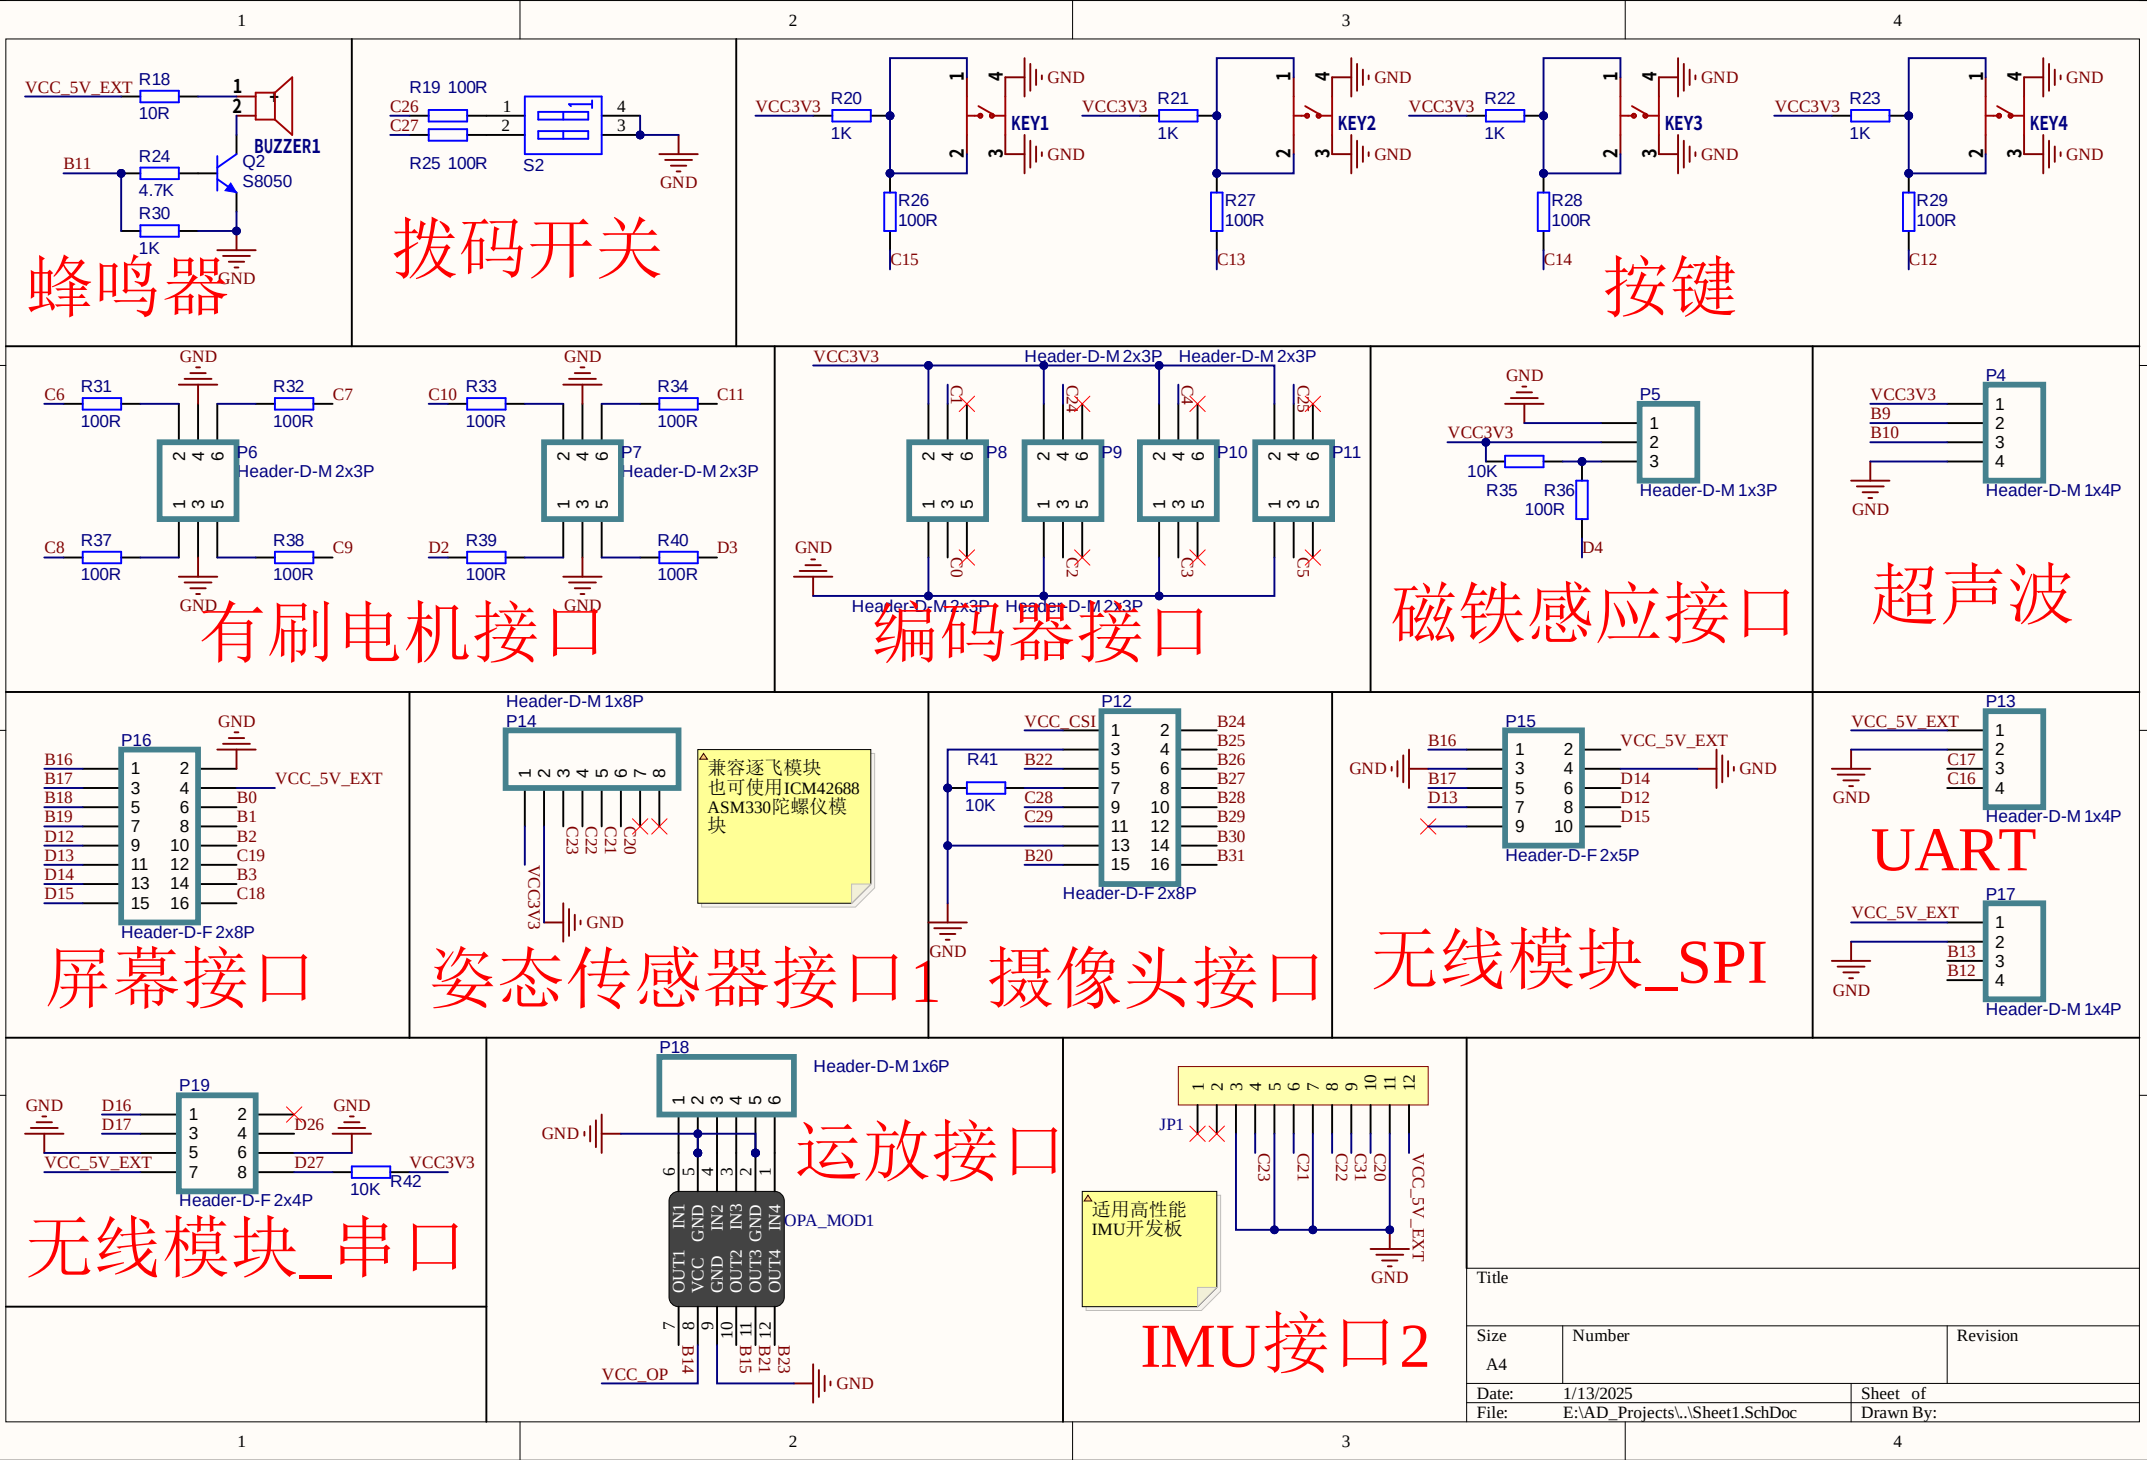

Title		
Size	Number	Revision
A4		
Date:	1/13/2025	Sheet of
File:	E:\AD_Projects\...\Sheet1.SchDoc	Drawn By:

Comment	Description	Designator	Footprint	Libref	Quantity
3KHz	驱动方式:有源(内含驱动线路)构造类型:电磁式;频率:3KHz;声压(SPL):85dB	BUZZER1	BUZ-TH_BD9.6-P5.00-D07-FD	HNB09A05	1
10uF 16V 铝电容	贴片铝电容 10uF 3216 16V	C1, C2, C5, C6, C9, C10	CAP-T-S 3216	T-S 10uF 3216 16V	6
100nF 50V X7R	贴片瓷片电容; M.L.C.C.:0603[1608];	C3, C4, C7, C8, C11, C12, C13, C14, C16, C18	CAPC1608[0603]-N	100nF 0603 50V X7R	10
4.7uF 35V X5R	贴片瓷片电容; M.L.C.C.:1206[3216];	C15, C17	CAPC3216[1206]S	4.7uF 1206 35V X5R	2
10nF 50V X7R	贴片瓷片电容; M.L.C.C.:0603[1608];	C19, C21	CAPC1608[0603]-N	100nF 0603 50V X7R	2
47uF 25V X5R	贴片瓷片电容; M.L.C.C.:1206[3216];	C20, C22	CAPC3216[1206]S	47uF 1206 25V X5R	2
100nF 50V X7R	贴片瓷片电容; M.L.C.C.:0603[1608];	C23	CAPC1608[0603]-L	100nF 0603 50V X7R	1
1uF 16V X7R	贴片瓷片电容; M.L.C.C.:0603[1608];	C24, C25	CAPC1608[0603]-L	1uF 0603 16V X7R	2
T-S 10uF 3216 16V	贴片铝电容 10uF 3216 16V	C26	CAP-T-S 3216	T-S 10uF 3216 16V	1
BZT52C16	稳压二极管 齐纳二极管 Zener Diode	D1	SOD-123-L	Diode Zen	1
SS54	SS54 肖特基二极管	D2, D3	SMA-[LDO-214AC]	SS54	2
T型插头	T型插头	DCIN1	Wired 1-Header ThroughHole	T_Header	1
100uF/35V	直插固态电容	E1, E2	CT 2.5*6.3*7 - C	CS	2
220uF/25V	直插固态电容	E3, E4	CT 2.5*6.3*7 - C	CS	2
CON-12P	12P连接器	JP1	FFC1.0-WT-12P	Header 12	1
B3F-4055	电路结构:单刀单掷;按钮形状:矩形按钮;安装方式:直插;开关长度:12mm;开关高度:7.3mm;触点电流:50mA;额定电压(DC):24V;带灯:-;机械寿命:-;	KEY1, KEY2, KEY3, KEY4	B3F-4055	B3F-4055_C84931	4
5.6uH	电感值:5.6uH精度:±20%;额定电流:6A;饱和电流(Isat):6.5A;类型:-;	L1, L2	IND-SMD_L7.0-W6.6	MWSA0603S-5R6MT	2
翠绿贴片LED	翠绿贴片LED	LED1, LED2, LED3, LED4, LED5	LEDC1608[0603]-L	LED Chip Green	5
OPA_MOD	OPA module	OPA_MOD1	SEEXFREE_4CHANNEL_OPAAMOD	OPA_4CHANNEL_SEEXFREE	1
Header-D-M 1x3P	1x3pin 直插, 排针	P1, P2, P3, P5	HDR1X3-M	Header-D-M 1x3P	4
Header-D-M 1x4P	1x4pin 直插, 排针	P4, P13, P17	HDR1X4-M	Header-D-M 1x4P	3
Header-D-M 2x3P	2x3pin 直插, 双排针	P6, P7, P8, P9, P10, P11	HDR2X3-M	Header-D-M 2x3P	6
Header-D-F 2x8P	2x8pin 直插, 双排座	P12, P16	HDR2X8-F	Header-D-F 2x8P	2
Header-D-M 1x8P	1x8pin 直插, 排针	P14	HDR1X8-M	Header-D-M 1x8P	1
Header-D-F 2x5P	2x5pin 直插, 双排座	P15	HDR2X5-F	Header-D-F 2x5P	1
Header-D-M 1x6P	1x6pin 直插, 排针	P18	HDR1X6-M	Header-D-M 1x6P	1
Header-D-F 2x4P	2x4pin 直插, 双排座	P19	HDR2X4-F	Header-D-F 2x4P	1
WSD90P06DN56	类型:1个中心点;测量电压(Vds):60V;连续漏极电流(I _d):90A;功率(P _d):96W;导通电阻(R _{DS(on)} @V _{GS}):10.5mΩ@10V,30A;阈值电压(V _{GS(th)} @I _d):1.85V@250uA;	Q1	PDFN-8_L5.8-W4.9-P127-L56.1-BL	WSD90P06DN56	1
S8050	NPN 三极管	Q2	SOT-23	NPN S8050	1
2.7K ±1%	贴片电阻	R1, R3, R4	RESC1608[0603]-N	Res-Chip 6	3
10K ±1%	贴片电阻	R2, R7, R35	RESC1608[0603]-N	Res-Chip	3
100R ±1%	贴片电阻	R5, R6, R12, R31, R32, R33, R34, R36, R37, R38, R39, R40	RESC1608[0603]-N	Res-Chip_9	12
4.7K ±1%	贴片电阻	R8, R24	RESC1608[0603]-N	Res-Chip_3	2
27K ±1%	贴片电阻	R9	RESC1608[0603]-N	Res-Chip_3	1
50K	可调电阻	R10	RESPT03290W	Res-Adj_3p	1
53.6K ±1%	贴片电阻	R11	RESC1608[0603]-N	Res-Chip_3	1
200K ±1%	贴片电阻	R13, R15	RESC1608[0603]-N	Res-Chip_1	2
8.2K ±1%	贴片电阻	R14	RESC1608[0603]-N	Res-Chip_3	1
10.2K ±1%	贴片电阻	R16	RESC1608[0603]-N	Res-Chip_3	1
4.7K ±1%	贴片电阻	R17	RESC1608[0603]-L	Res-Chip_9	1
10R ±1%	贴片电阻	R18	RESC1608[0603]-N	Res-Chip_10	1
100R ±1%	贴片电阻	R19, R25, R26, R27, R28, R29	RESC1608[0603]-L	Res-Chip_2	6
1K ±1%	贴片电阻	R20, R21, R22, R23	RESC1608[0603]-L	Res-Chip_11	4
1K ±1%	贴片电阻	R30	RESC1608[0603]-N	Res-Chip_11	1
10K ±1%	贴片电阻	R41, R42, R44	RESC1608[0603]-L	Res-Chip	3
0R ±1%	贴片电阻	R43	RESC1608[0603]-L	Res-Chip_1	1
SW-SPDT	单刀双掷开关 3脚船型、铝子、拨动开关 SPDT Subminiature Toggle Switch	S1	SS12D10	SW-SPDT	1
SW DIP-2	2位拨码开关	S2	Code SW-2-DIP-2.54	Code SW-2	1
KF128-5.08-2P-AA	结构:1x2P;间距:5.08mm;颜色:绿色;安装方式:直插;额定电流:24A;额定电压:250V;排数:1;线规:-AWG12~22;线规-平方毫米:2.5;每排PIN数:2;工作温度范围:-40℃~+105℃;	U1, U2	CONN-TH_P5.08_KF128-5.08-2P	KF128-5.08-2P-AA	2
RT9013-33	3.3V 500mA SOT-23-5 LDO	U3, U4	SOT-23-5	RT9013-33	2
TP57A2033PDBVR	输出类型:固定;最大输入电压:6V;输出电压:3.3V;输出电流:300mA;输出极性:正接;	U5	SOT-23-5_L2.9-W1.6-P0.95-L52.8-BR	TP57A2033PDBVR	1
SCT2452STER		U6, U7	ESOP-8_L4.9-W3.9-P127-L56.0-BL-EP	SCT2452STER	2
SY6280	SY6280 2A 限流配电开关	U8	SOT-23-5	SY6280	1
MIMXRT1064xV1_Co reBoard	速飞科技IMXRT1064核心板整体原理,可直接使用	U9	MIMXRT1064xV1_Co reBoard - 3D	MIMXRT1064xV1_Co reBoard	1